



Qualcomm Technologies, Inc.

QCC743M Design Verification Test

Report

80-WL740-72 Rev. AD

March 3, 2025

1 Wi-Fi DVT

1.1 Basic information

This document describes the hardware RF design test data for QCC743M.

Test samples information

- Sample size: 3
- Tx/Rx chain: 1 Tx, 1 Rx.
- Supported mode: Single band 2.4 GHz, 802.11b/g/n/ax,
- Sample type: TT

Bench software

QCC740.OR.1.0

DVT specifics

- DVT level: CS
- Temperature/Voltage

Condition	Value
Temperature	-40deg 25deg 85deg
Voltage	Nominal

The test results captured here are based on early sample evaluation of the system-level performance of the [platform] using conducted tests. Results are in relation to the limited number of samples, the uniqueness of the test implementation (test instruments, fixtures, software, and so on), the uncertainty of the test station upon which the tests are conducted, and the software level used in the tests.

1.2 List of acronyms

Table 1-1 Acronyms and descriptions

Acronym	Description
DUT	Device under test
EVM	Error vector magnitude
ISS	Input signal strength
KPI	Key performance indicators
LAN	Local area network

Acronym	Description
MAD	Median absolute deviation
MIMO	Multiple Input Multiple Output
MTP	Modem test platform
Nrx	Number of Receive antennas
Nss	Number of Spatial streams
Ntx	Number of Transmit antennas
PER	Packet error rate
PSR	Packet success rate
Rx	Receiver
Tx	Transmitter
VSA	Vector signal analyzer
VSG	Vector signal generator
VST	Vector signal transceiver
WAN	Wide area network (also WWAN, wireless WAN)
WLAN	Wireless LAN

1.3 Test setup

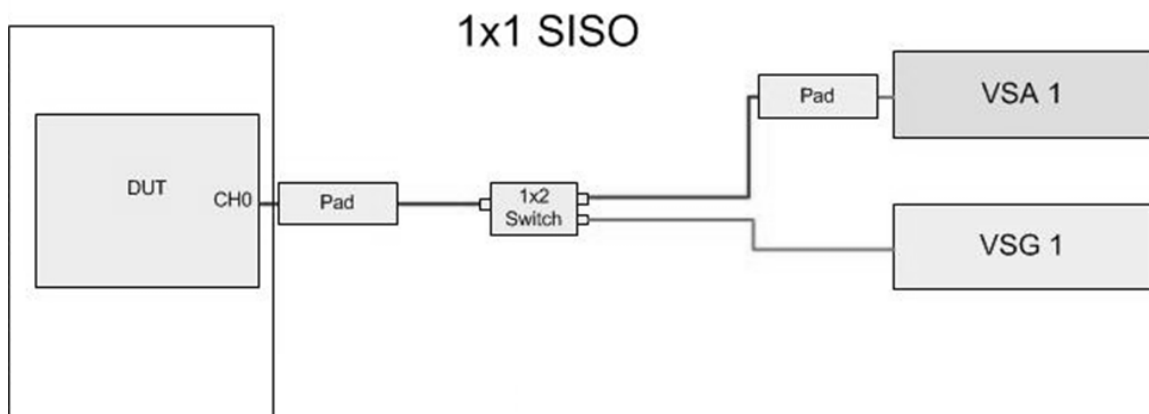


Figure 1-1 DVT test setup for Wi-Fi testing

1.4 Wi-Fi test items

As part of DVT, the following tests have been conducted as per IEEE 802.11 ax/b/g/n specification requirements.

- Transmitter tests
 - Tx Power Accuracy
 - Tx EVM
 - Tx Spectral Mask
 - Tx Center Frequency Tolerance

- Receiver tests
 - Rx Sensitivity
 - Rx Dynamic Range

1.5 Tx power accuracy

1.5.1 Purpose of test

This test measures the target power vs. measured output power for each Tx antenna.

1.5.2 Test methodology

With the DUT placed inside a shielded enclosure, each chain's antenna port is connected through a set of 50 Ω coaxial cables to each input port of VSA. The DUT is configured to transmit continuously at its calibrated transmit power levels for given data rates on all available Tx Chains simultaneously. The output power for each chain is measured.

1.5.3 Specifications

Calibration target power levels account for EVM compliance, spectral mask compliance, transmit packet error rate compliance, and power consumption compliance.

1.6 Tx EVM

1.6.1 Purpose of test

This test measures transmitter modulated signal quality per the 802.11 a/b/g/n error vector magnitude specifications of the IEEE.

1.6.2 Test methodology

With the DUT placed inside a shielded enclosure, the DUT's main antenna port is connected through a set of 50 Ω coaxial cables and splitters to a Vector Signal Analyzer. The DUT is configured to transmit at the targeted power level on all available Tx Chains. The test is performed across a set of defined channels and rates. EVM measurements are either with Header only and/or Full Packet Channel Estimation. Output Power and EVM is recorded for each chain following IEEE measurement guideline of at least 16 symbols.

1.6.3 Specifications

- 802.11a/g: IEEE Std 802.11-2012; Section 18.3.9.8; Table 18-13
- 802.11n: IEEE Std 802.11-2012; Section 20.3.20.7.4; Table 20-22
- 802.11ax: IEEE P802.11ax/D1.0 Nov 2016; Table 28-45

Table 1-2 802.11a/g maximum EVM Limits specification

Data rate (Mbps)	Relative Constellation Error (dB)
6	-5
9	-8
12	-10
18	-13
24	-16
36	-19
48	-22
54	-25

Table 1-3 802.11n maximum EVM limits specification

MCS index	Modulation	Coding rate	Relative Constellation Error (dB)
MCS 0	BPSK	1/2	-5
MCS 1	QPSK	1/2	-10
MCS 2	QPSK	3/4	-13
MCS 3	16 QAM	1/2	-16
MCS 4	16 QAM	3/4	-19
MCS 5	64 QAM	2/3	-22
MCS 6	64 QAM	3/4	-25
MCS 7	64 QAM	5/6	-27

Table 1-4 802.11ax maximum EVM limits specification

MCS index	Modulation	Coding rate	Relative Constellation Error (dB)
MCS 0	BPSK	1/2	-5
MCS 1	QPSK	1/2	-10
MCS 2	QPSK	3/4	-13
MCS 3	16 QAM	1/2	-16
MCS 4	16 QAM	3/4	-19
MCS 5	64 QAM	2/3	-22
MCS 6	64 QAM	3/4	-25
MCS 7	64 QAM	5/6	-27
MCS8	256 QAM	3/4	-30
MCS9	256 QAM	5/6	-32

1.7 Tx spectral mask

1.7.1 Purpose of test

This test measures the maximum conducted transmit power at which the transmit spectrum meets the IEEE mask requirements.

1.7.2 Test methodology

With the DUT placed inside a shielded enclosure, the DUT's antenna ports are connected through a set of 50 Ω coaxial cables and splitters to an NI VSA. The DUT is configured to transmit at a given data rate. The transmitter output power is increased until the appropriate IEEE mask specifications are exactly met, at which point the output power is recorded. The test is performed across a set of pre-defined channels and rates.

1.7.3 Specifications

- 802.11b: IEEE Std 802.11-2012; Section 16.4.7.5; Figure 16-11
- 802.11a/g: IEEE Std 802.11-2012; Section 18.3.9.3; Figure 18-13
- 802.11n: IEEE Std 802.11-2012; Section 20.3.20.1; Figure 20-17 to 20
- 802.11ax: IEEE P802.11ax/D1.0-Nov 2016; Section 28.3.18.1

Table 1-5 IEEE spectral mask specification

Mode	Frequency Offset (MHz)	IEEE Specification (dBr)
802.11b	± 11	0
	± 22	-30
	>22	-50
802.11a/g	± 9	0
	± 11	-20
	± 20	-28
	± 30	-40
802.11n HT20 (2.4 GHz)	± 9	0
	± 11	-20
	± 20	-28
	± 30	-45
802.11n HT40 (2.4 GHz)	± 19	0
	± 21	-20
	± 40	-28
	± 60	-45
802.11ax HE20 (2.4 GHz)	± 9.75	0
	± 10.25	-20
	± 20	-28
	± 30	-40
802.11ax HE40 (2.4 GHz)	± 19.5	0
	± 20.5	-20
	± 40	-28
	± 60	-40

1.8 Tx frequency tolerance

1.8.1 Purpose of test

This test measures the reference oscillator frequency drift.

1.8.2 Test methodology

With the DUT placed inside a shielded enclosure, the DUT's main antenna port is connected through a 50-Ohm coaxial cable to an NI VSA and is configured to transmit a continuous wave carrier, and the carrier frequency is measured. PPM is calculated using the equation below.

$$PPM = \frac{f_{measured} - f_{carrier}}{f_{carrier}} \times 10^6$$

1.8.3 Specifications

- 802.11n: IEEE Std 802.11-2012; Section 20.3.20.4

Table 1-6 IEEE center frequency tolerance specification

Frequency Band (GHz)	Frequency Tolerance Limit (PPM)
2.4	+/- 25

1.9 Rx sensitivity

1.9.1 Purpose of test

This test measures the minimum RF input signal level at which the receiver Packet Error Rate (PER) is less than 10%. Equivalently, this test measures the minimum RF input level at which the receiver Packet Success Rate (PSR) is greater than 90%.

1.9.2 Test methodology

With the DUT placed inside a shielded enclosure, the antenna ports are connected through a set of 50 Ω coaxial cables to the output ports of NI VSG. The output signal of VSG is reduced until the DUT's received packet error rate is 10% at which point the input signal level (dBm) to DUT including cable losses and if any applied attenuation is recorded. The procedure is repeated for pre-specified frequencies and rates. Test is conducted on each individual chain alone and all available chains receiving at once.

1.9.3 Specifications

- 802.11b: IEEE Std 802.11-2012; Section 16.4.8.2, 17.4.8.2
- 802.11a/g: IEEE Std 802.11-2012; Section 18.3.10.2; Table 18-14

- 802.11n: IEEE Std 802.11-2012; Section 20.3.21.1; Table 20-23
- 802.11ax: IEEE P802.11ax/D1.0 Nov-2016 Section 28.3.17.2; Table 28-41

Table 1-7 802.11b minimum sensitivity specification

Data rate (Mbps)	Minimum sensitivity (dBm)
2L	-80
2S	-80
11L	-76
11S	-76

Table 1-8 802.11a/g minimum sensitivity specification

Data rate (Mbps)	Minimum sensitivity (dBm)
6	-82
9	-81
12	-79
18	-77
24	-74
36	-70
48	-66
54	-65

Table 1-9 802.11n minimum sensitivity specification

MCS index	Modulation	Coding rate	Minimum sensitivity (dBm)	
			20 MHz BW	40 MHz BW
MCS 0	BPSK	1/2	-82	-79
MCS 1	QPSK	1/2	-79	-76
MCS 2	QPSK	3/4	-77	-74
MCS 3	16 QAM	1/2	-74	-71
MCS 4	16 QAM	3/4	-70	-67
MCS 5	64 QAM	2/3	-66	-63
MCS 6	64 QAM	3/4	-65	-62
MCS 7	64 QAM	5/6	-64	-61

Table 1-10 802.11ax minimum sensitivity specification

MCS index	Modulation	Coding rate	Minimum sensitivity (dBm)	
			20 MHz BW	40 MHz BW
MCS 0	BPSK	1/2	-82	-79
MCS 1	QPSK	1/2	-79	-76
MCS 2	QPSK	3/4	-77	-74
MCS 3	16 QAM	1/2	-74	-71
MCS 4	16 QAM	3/4	-70	-67

MCS index	Modulation	Coding rate	Minimum sensitivity (dBm)	
			20 MHz BW	40 MHz BW
MCS 5	64 QAM	2/3	-66	-63
MCS 6	64 QAM	3/4	-65	-62
MCS 7	64 QAM	5/6	-64	-61
MCS 8	256 QAM	3/4	-59	-56
MCS 9	256 QAM	5/6	-57	-54

1.10 Rx dynamic range (waterfall)

1.10.1 Purpose of test

This test measures the receiver's conducted packet success rate percentage as the input signal level is swept through the receiver's entire dynamic range. The test effectively measures the receiver's minimum detectable input signal level, the maximum detectable input signal level, and the AGC performance across the input signal amplitude range.

1.10.2 Test methodology

The test methodology is identical to that employed in the receiver sensitivity test. However, instead of searching specifically for the input signal level at which the DUT's received PER meets 10%, the test sweeps the input signal level to the DUT in 2 dB steps across the entire receiver dynamic range, and records receiver PER vs. input power. The test is performed across a set of pre-defined channels and data rates. Test is conducted on each individual chain alone and all available chains receiving at once.

1.10.3 Specifications

- 802.11b: IEEE Std 802.11-2012; Section 16.4.8.3, 17.4.8.3
- 802.11a/g: IEEE Std 802.11-2012; Section 18.3.10.5
- 802.11n: IEEE Std 802.11-2012; Section 20.3.21.4
- 802.11ax: IEEE P802.11ax/D1.0 Nov-2016; Section 28.3.17.5

Table 1-10 IEEE receiver maximum input specification

Mode	Receiver Maximum Input Level (dBm)
802.11b (2 Mbps)	-4
802.11b (11 Mbps)	-10
802.11g	-20
802.11n 2.4 GHz	-20
802.11ax 2.4 GHz	-20

1.11 DVT test coverage

This section provides information on the DVT coverage.

Table 1-11 List of center frequencies tested in standard DVT

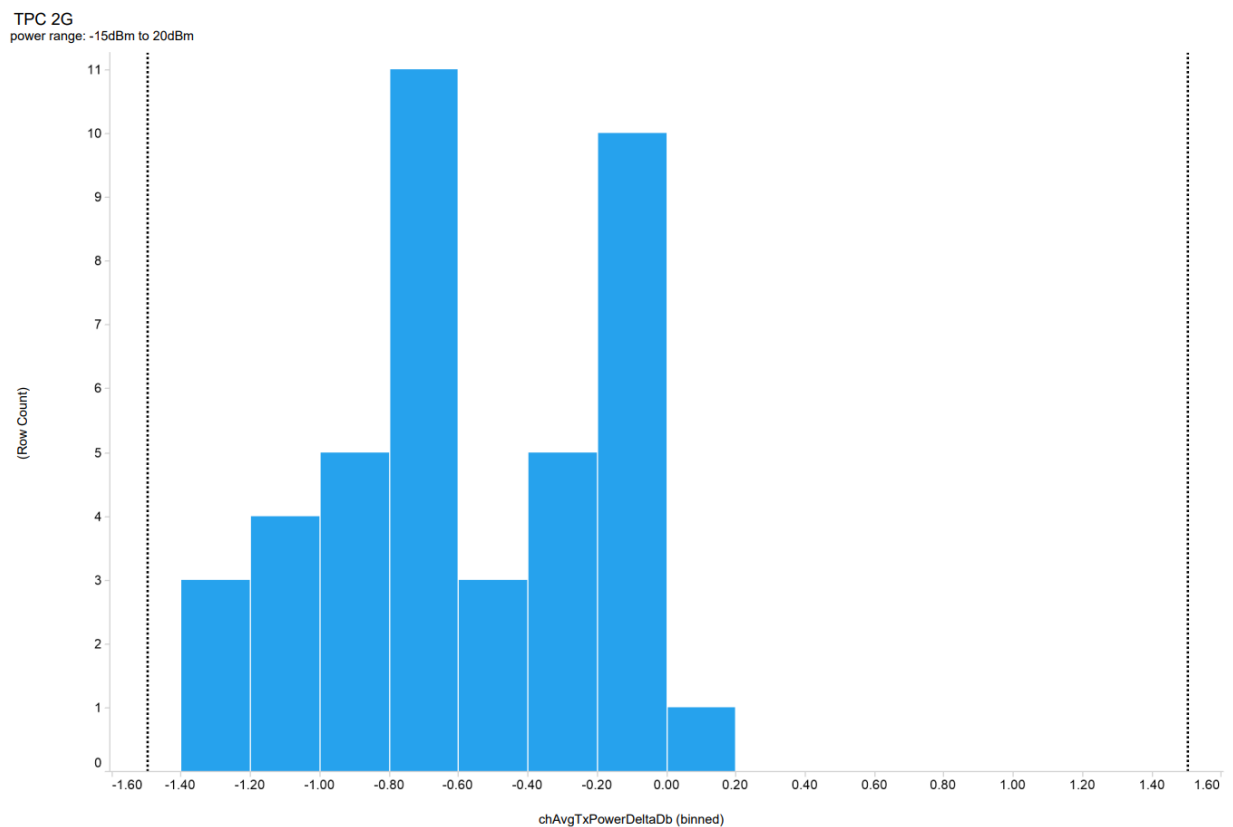
Band	Frequencies (MHz)
2.4 GHz BW20	2412, 2442, 2472
2.4 GHz BW40	2422, 2442, 2462

1.12 Summary result

Unless otherwise stated, the summary results are for each DUT and each channel tested.

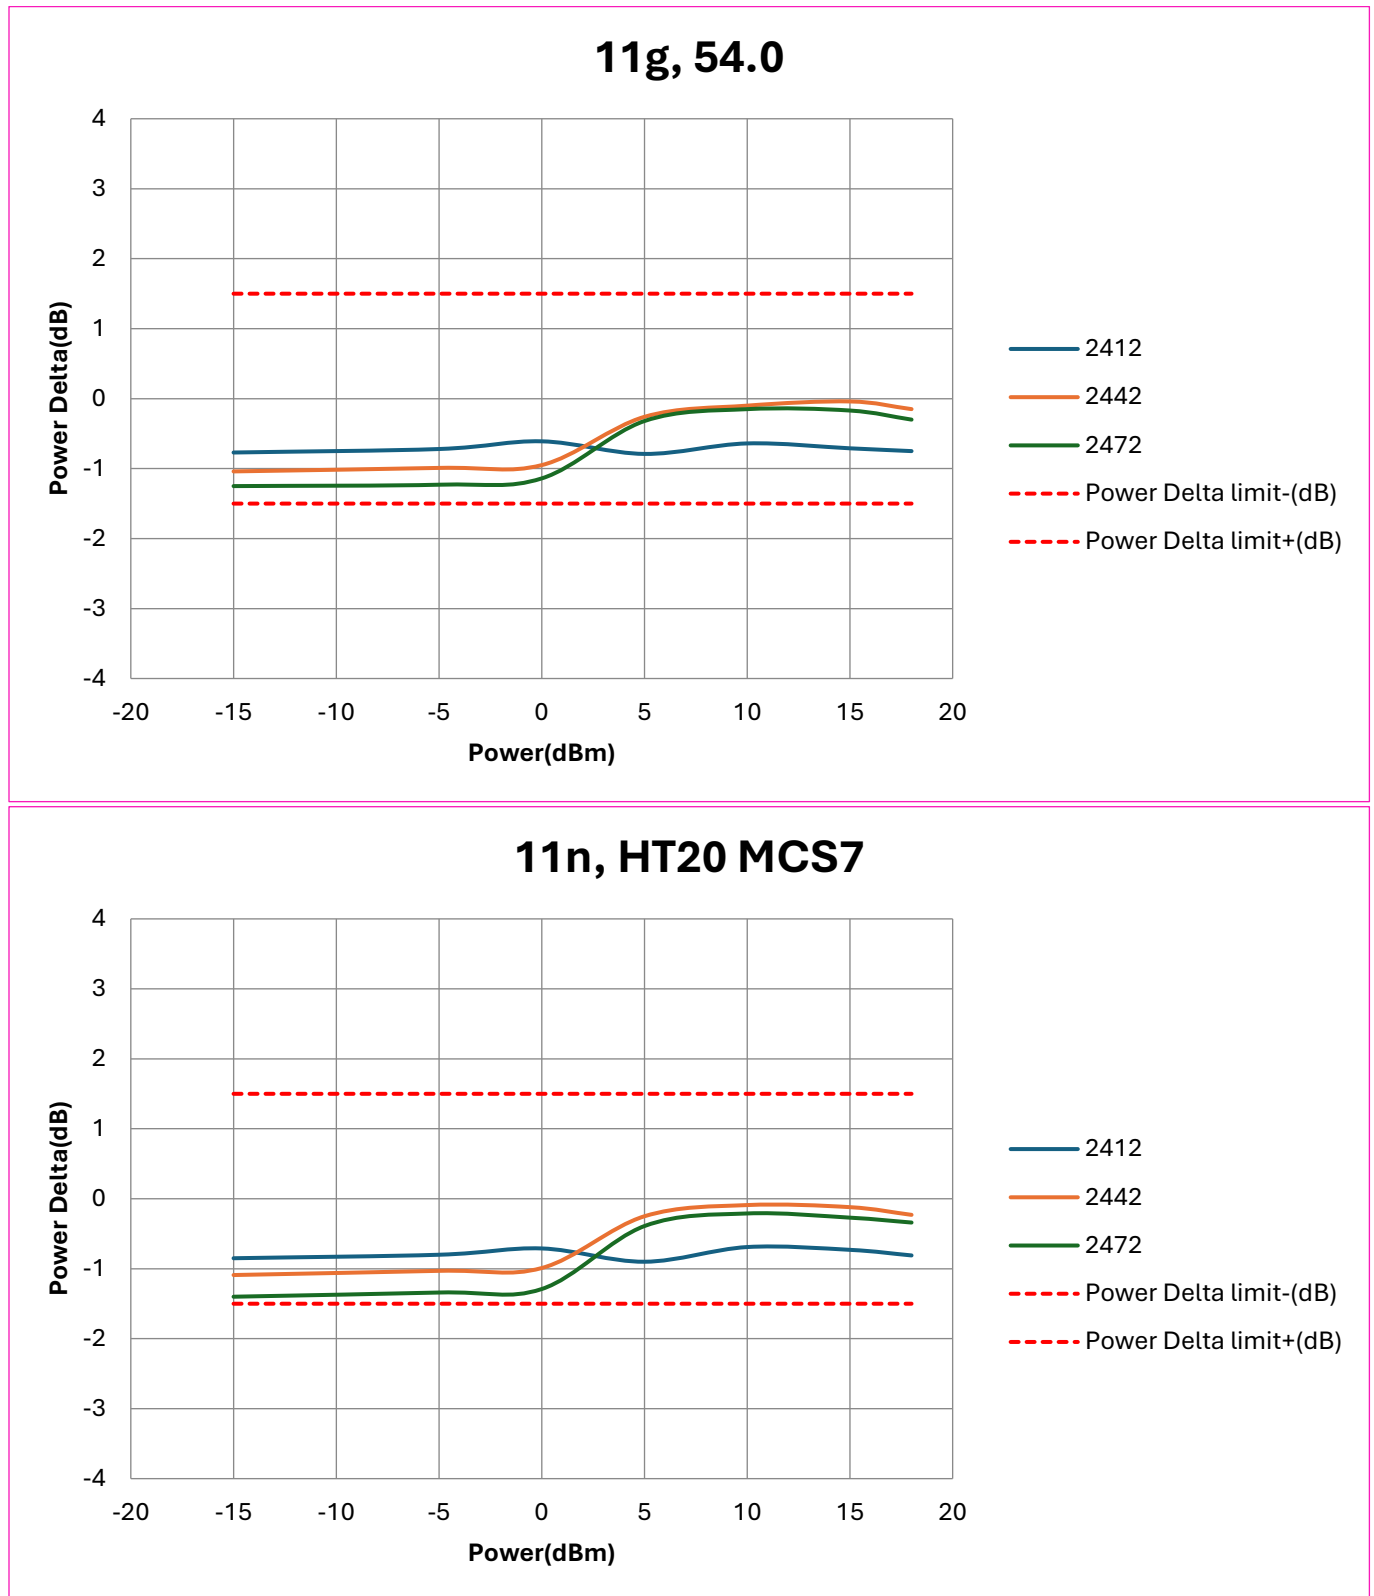
1.12.1 WLAN Tx power accuracy summary

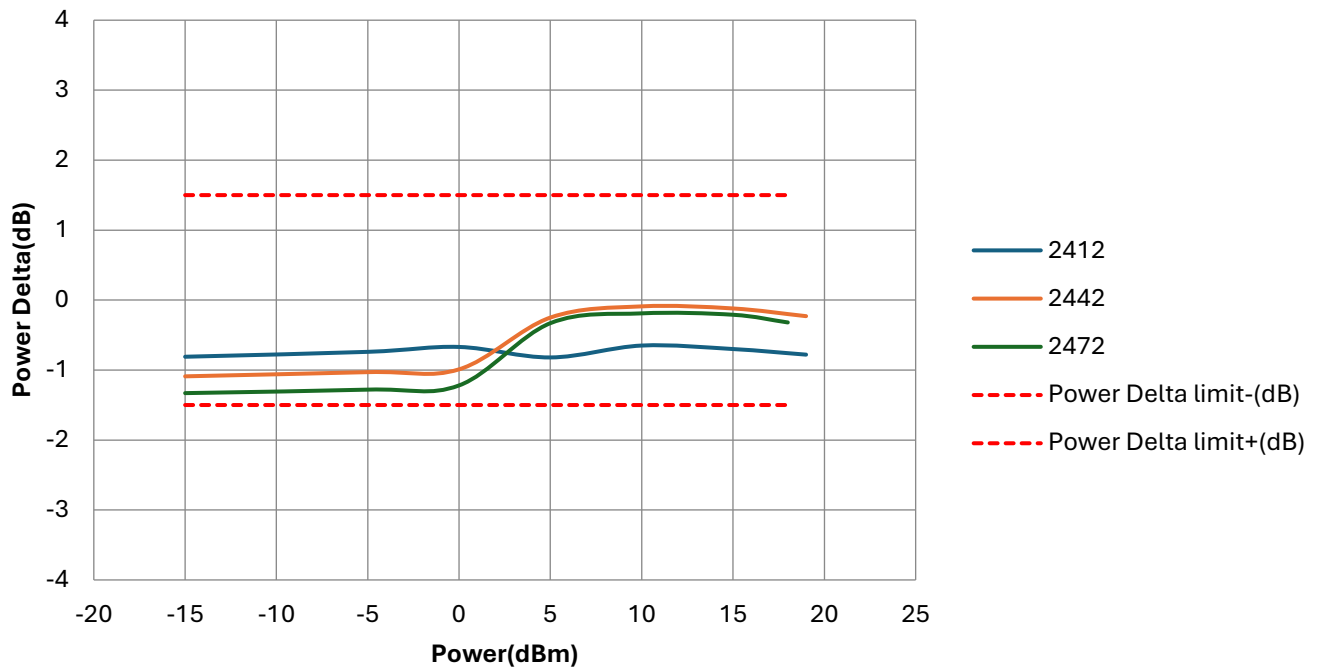
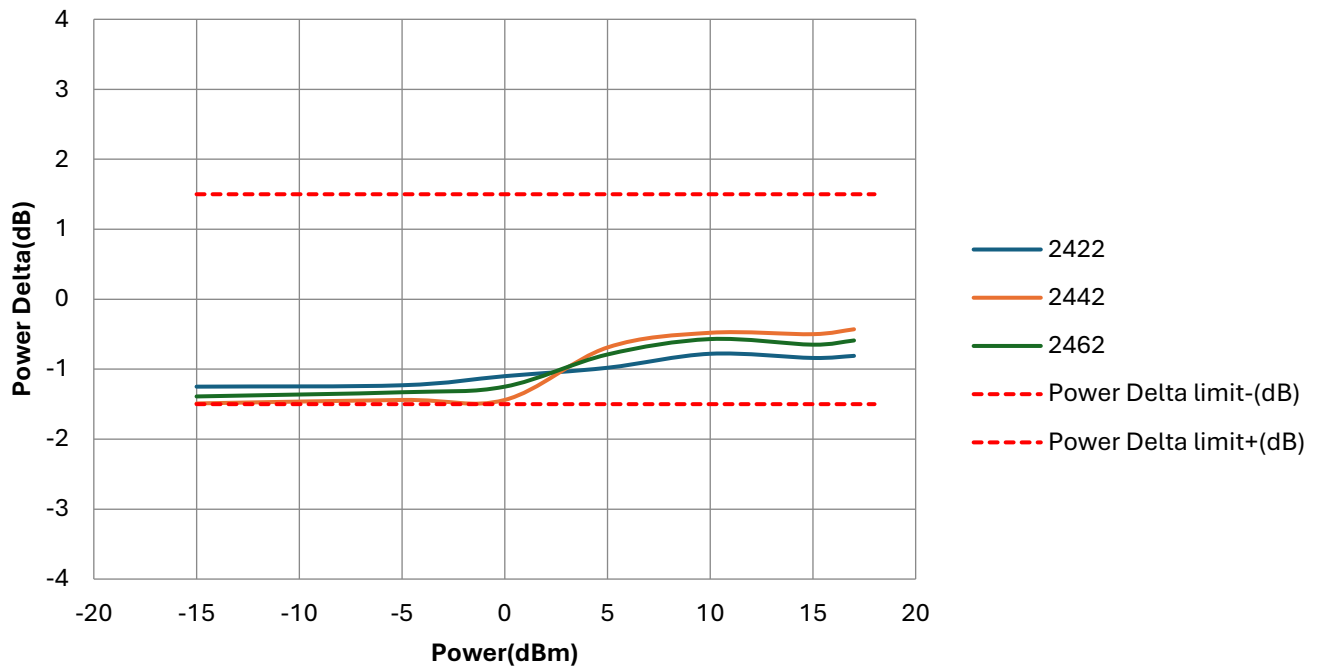
Tx power accuracy histogram 2 GHz

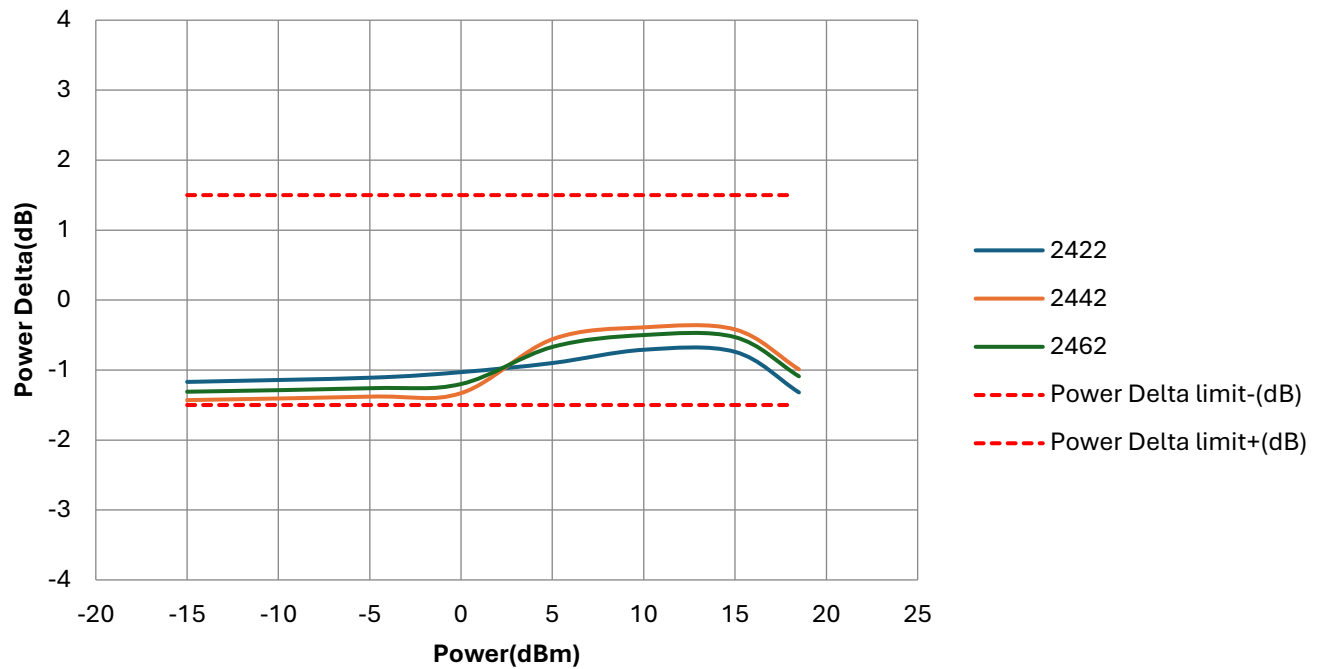
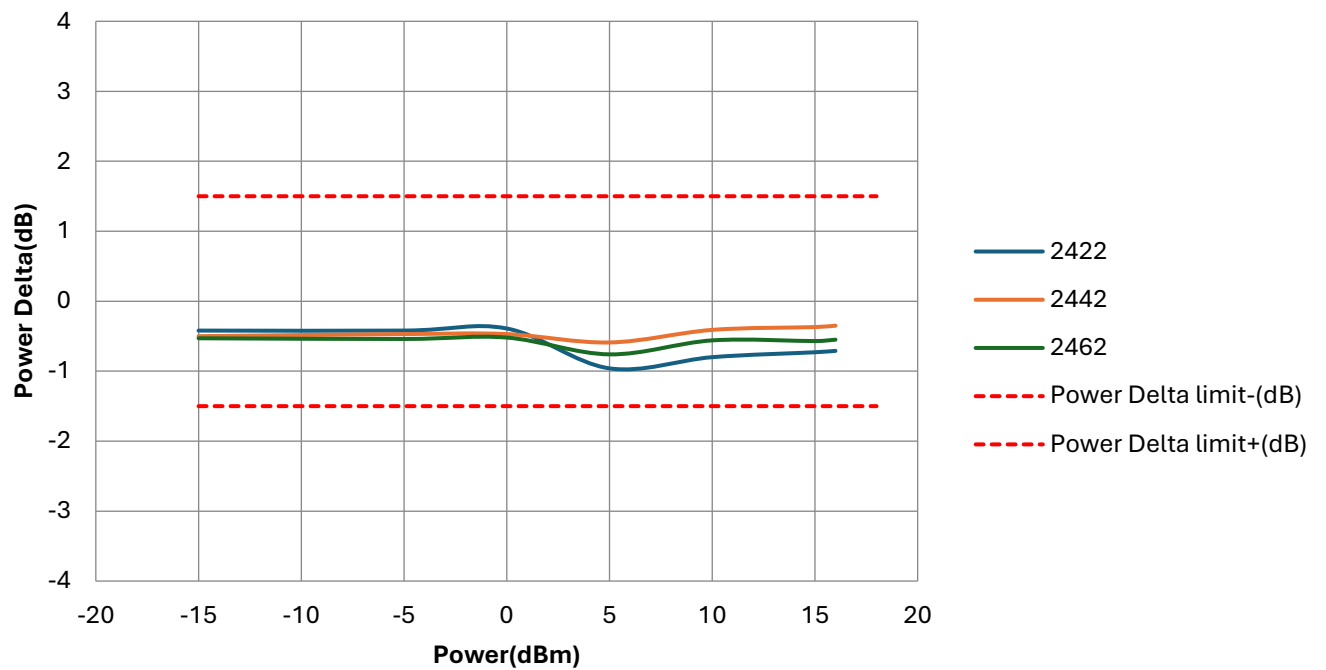


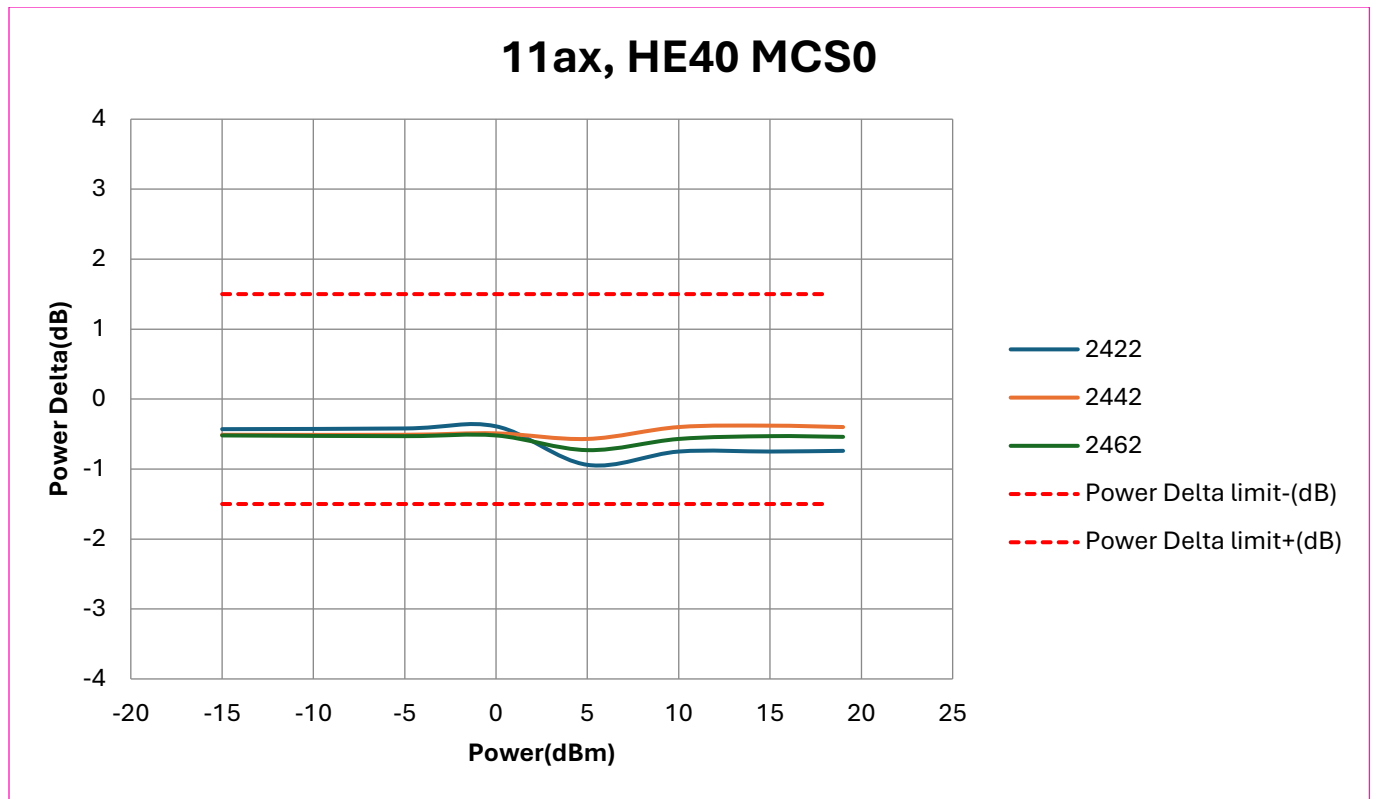
Histogram of 2 GHz transmit power accuracy for all test conditions and boards at T = 25°C

1.12.2 WLAN Tx power accuracy



11n, HT20 MCS0**11n, HT40 MCS7**

11n, HT40 MCS0**11ax, HE40 MCS9**

**Observations:**

All tests meet transmit power accuracy of +/- x dB.

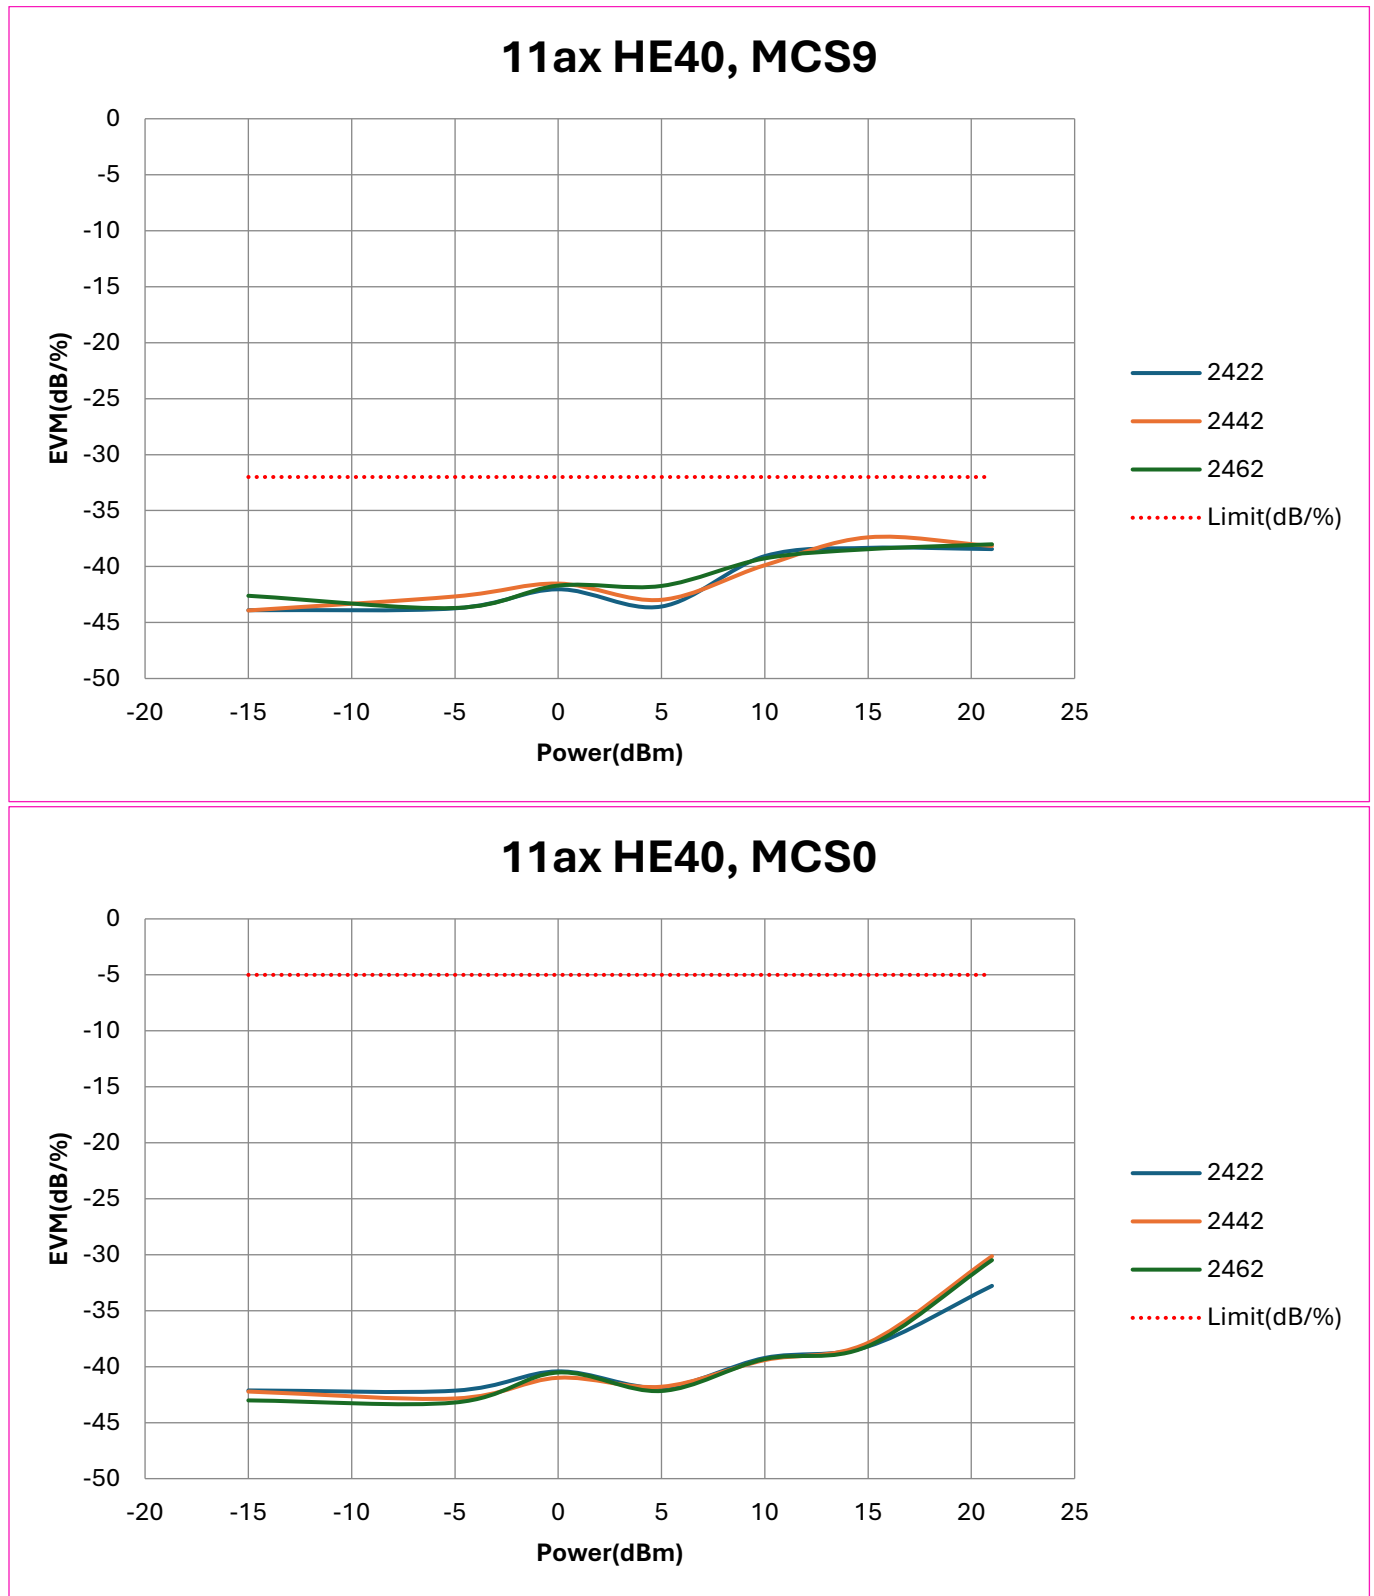
1.12.3 WLAN Tx test summary

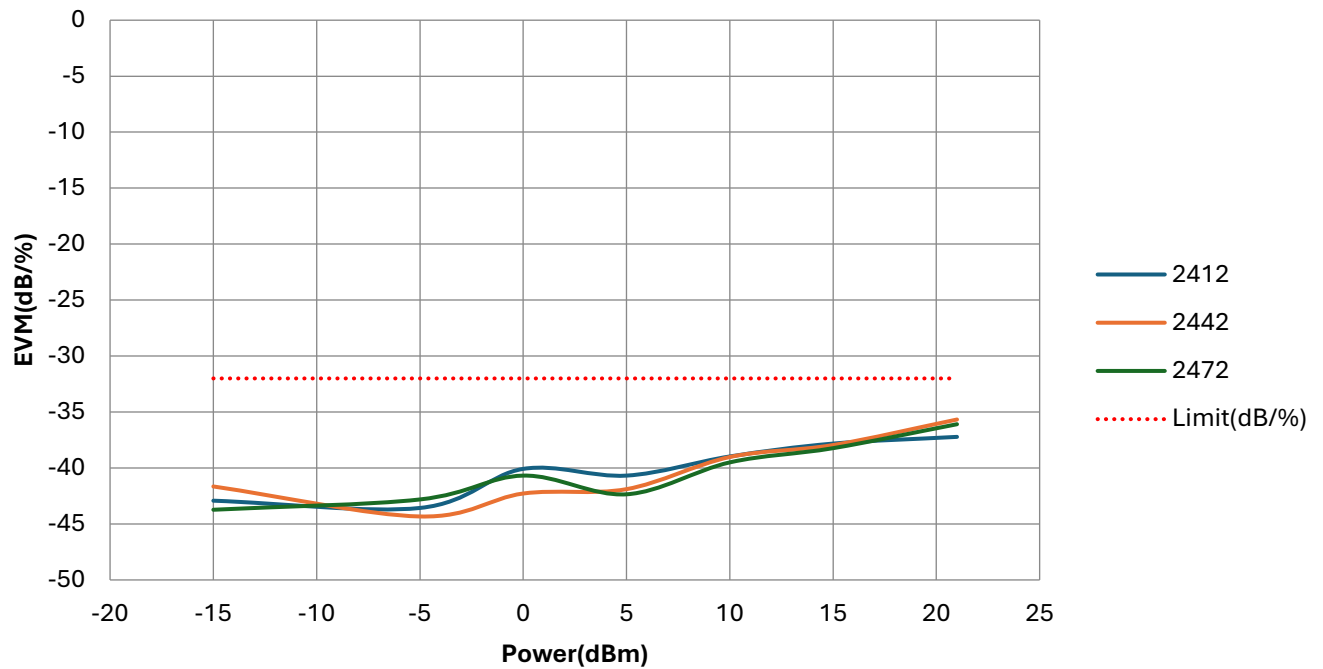
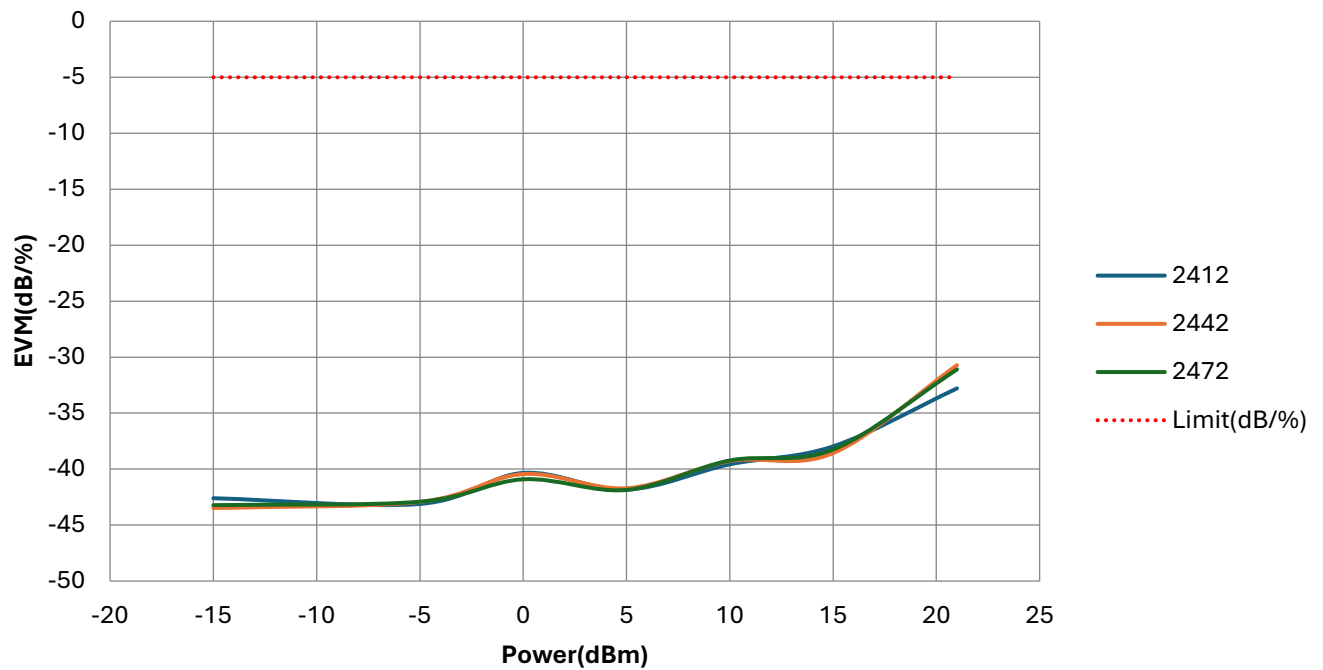
Rate name	Nss	Ntx	Power Level	Median (txPowerAvg)		
				-40deg	25deg	85deg
11B_1Mbps	-	1	21.00	21.95	21.3	21.2
11B_11Mbps	-	1	21.00	21.86	21.2	21.08
11G_6Mbps	-	1	20.00	20.62	19.6	19.79
11G_54Mbps	-	1	18.00	18.56	17.7	17.82
11N_HT20_MCS0	1	1	19.00	19.54	18.6	18.75
11N_HT20_MCS7	1	1	18.00	18.44	17.6	17.56
11N_HT40_MCS0	1	1	18.50	19.37	17.5	18.57
11N_HT40_MCS7	1	1	17.00	17.23	16.7	16.52
11ax_HE20_MCS0	1	1	19.00	19.59	18.5	18.81
11ax_HE20_MCS9	1	1	17.00	17.4	16.4	17.71
11ax_HE40_MCS0	1	1	19.00	19.46	18.4	18.66
11ax_HE40_MCS9	1	1	16.00	16.33	15.4	15.65

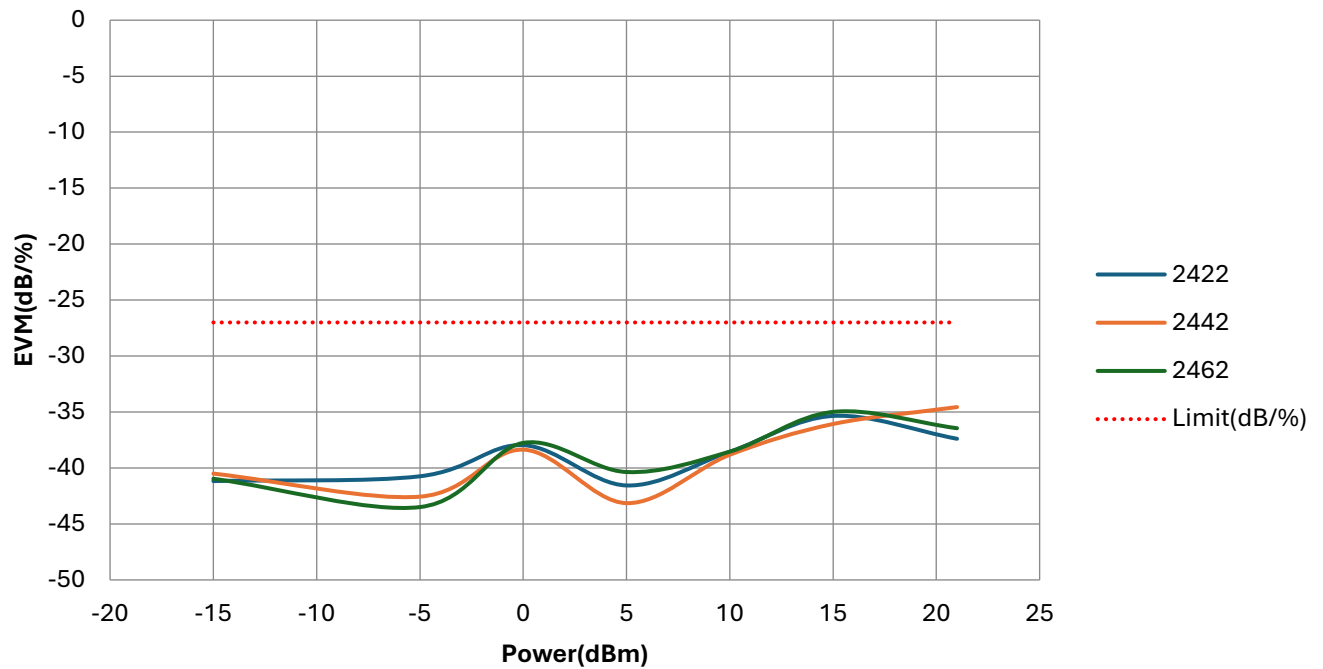
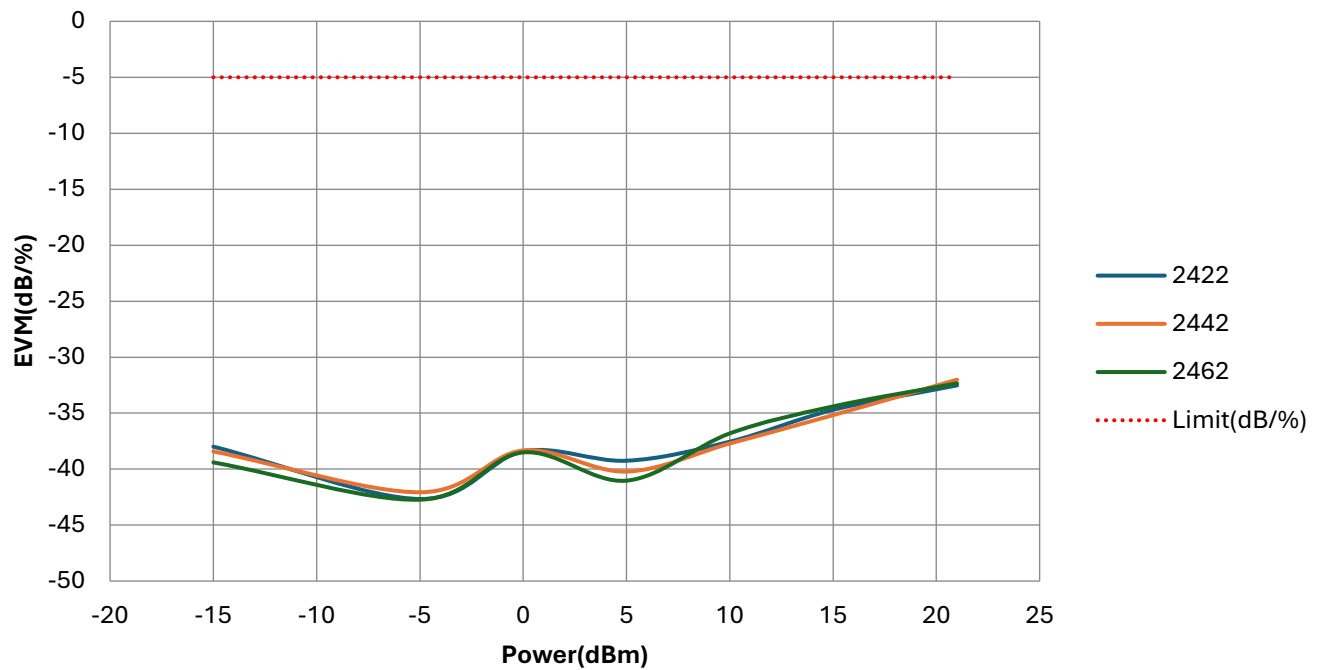
1.12.4 WLAN Tx EVM test summary

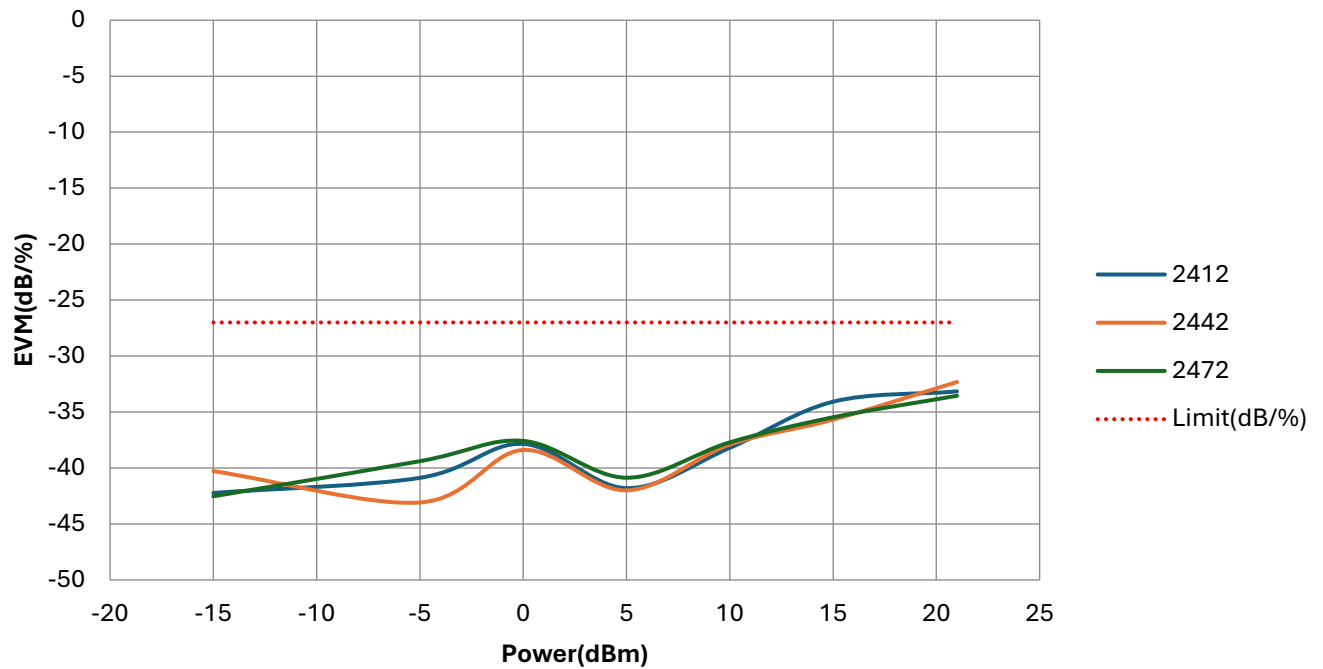
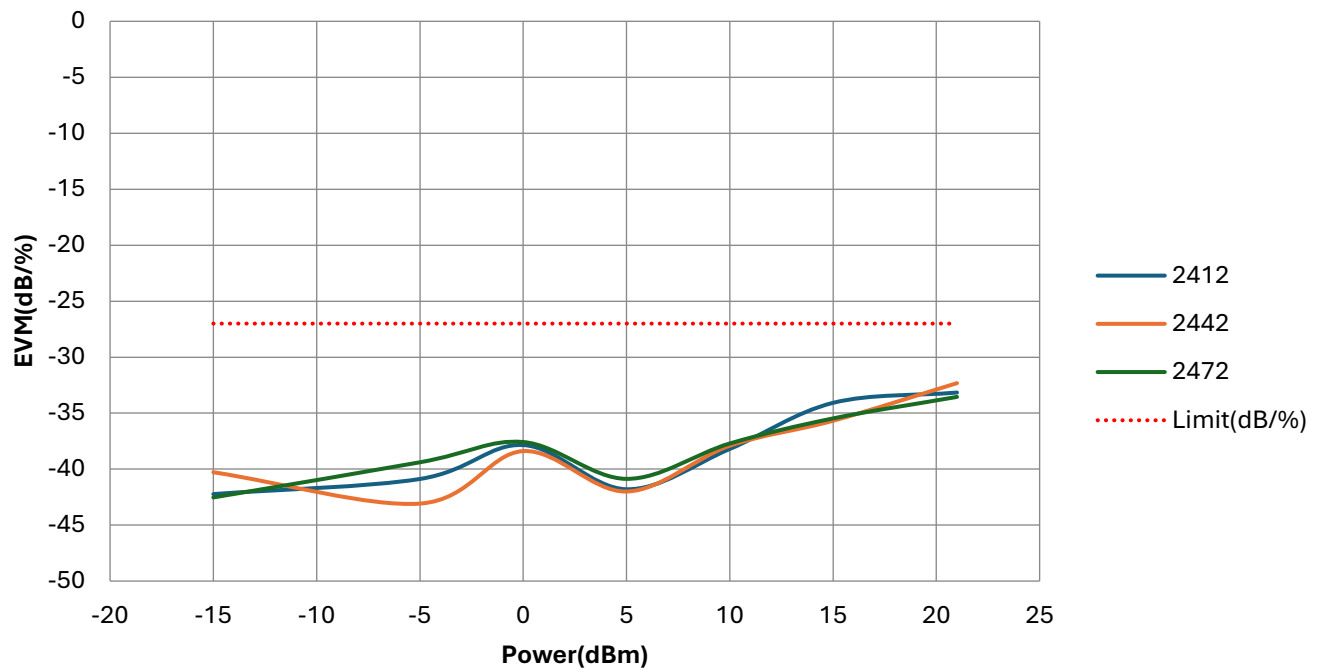
Rate name	Nss	Ntx	Power Level	Ch Estimation Method	Median (evm)		
					-40deg	25deg	85deg
11G_54Mbps	-	1	18	preambleOnly	-32.07	-31.48	-32.03
11N_HT20_MCS7	1	1	18	preambleOnly	-32.02	-32.33	-32.21
11N_HT40_MCS7	1	1	17	preambleOnly	-35.32	-35.29	-34.16
11ax_HE20_MCS9	1	1	17	preambleOnly	-35.56	-34.7	-35.7
11ax_HE40_MCS9	1	1	16	preambleOnly	-37.25	-38.18	-37.79

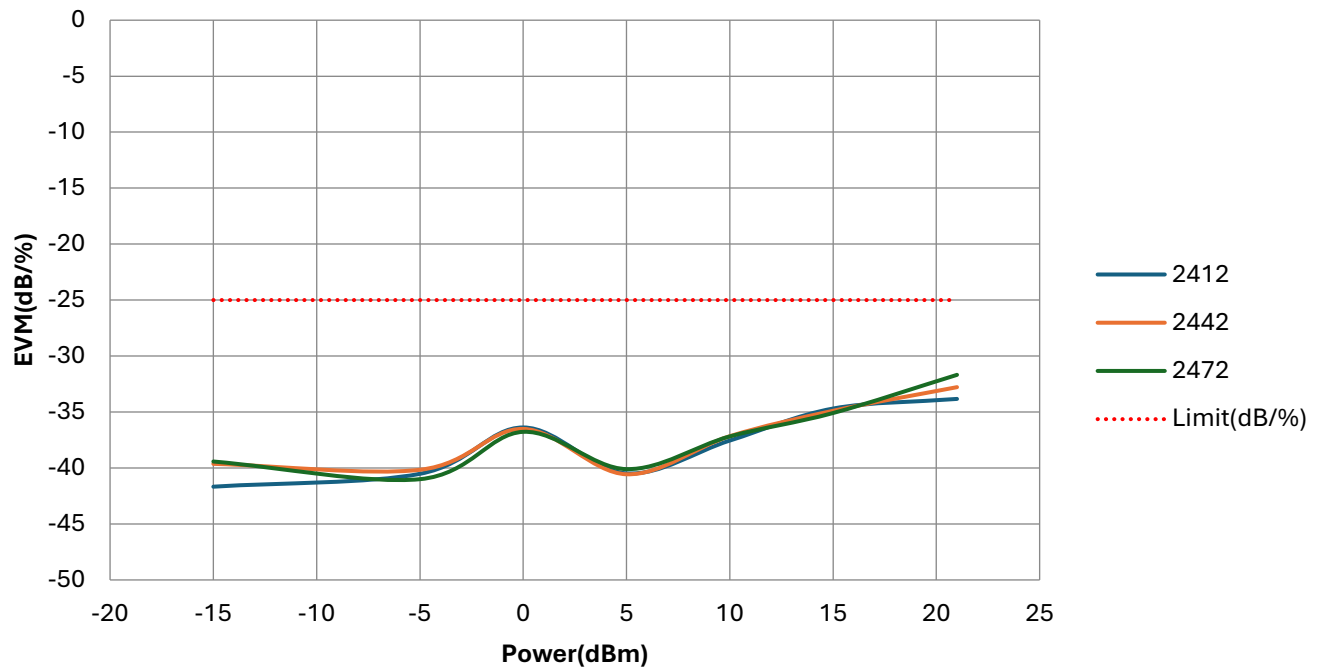
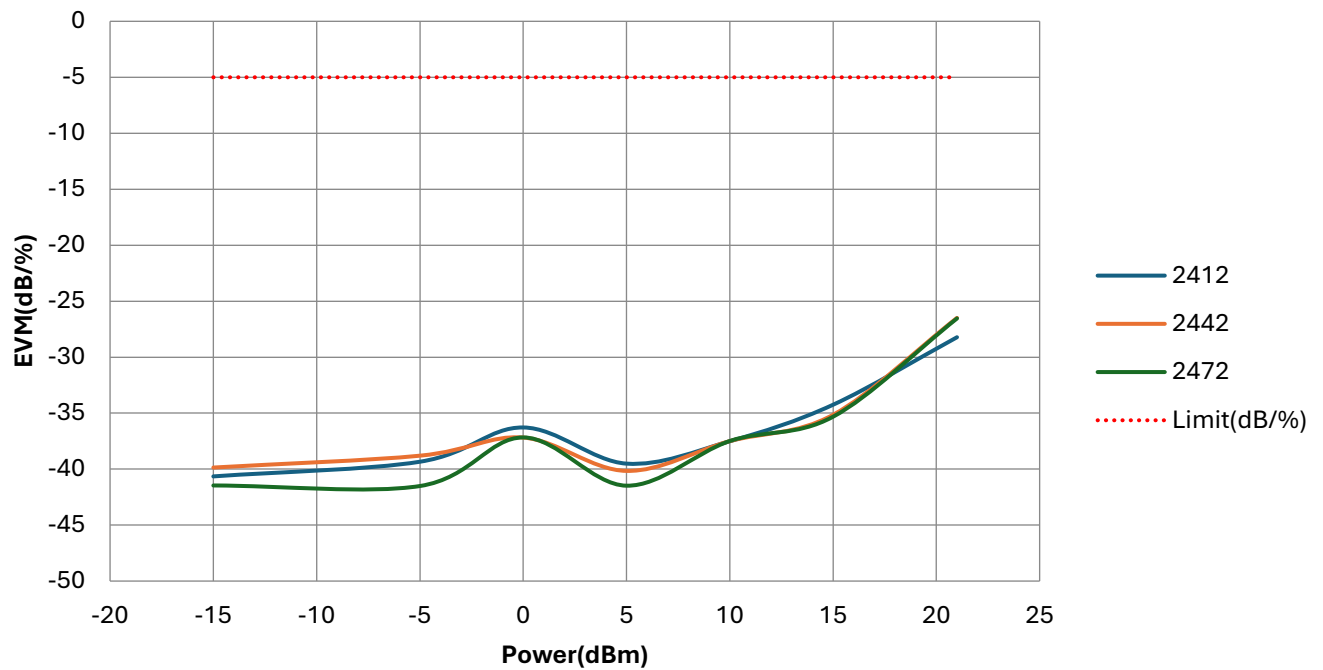
1.12.5 WLAN Tx power vs. EVM

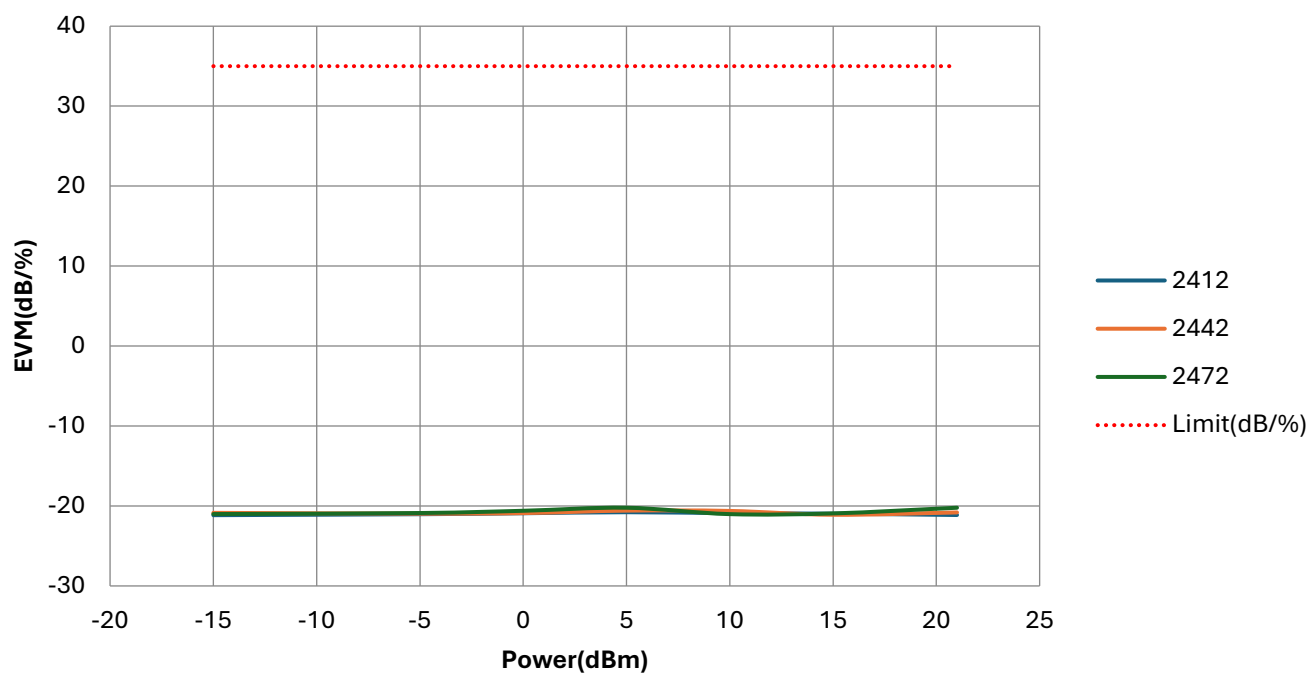
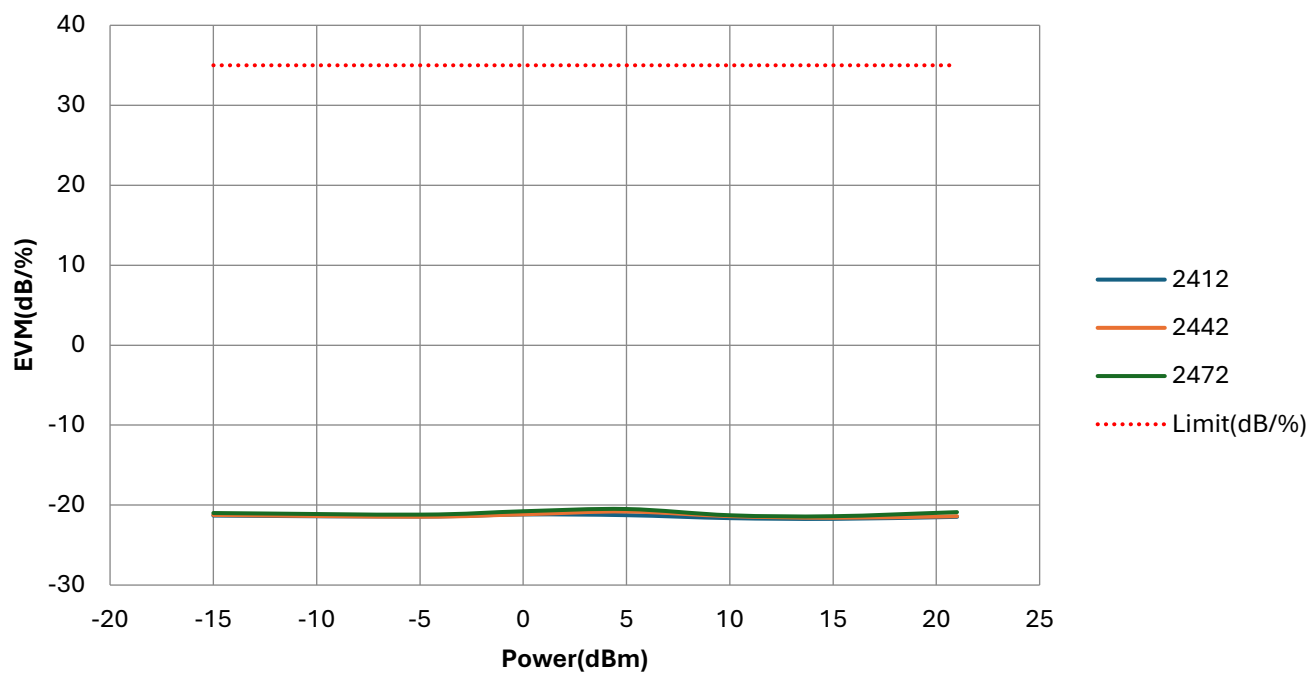


11ax HE20, MCS9)**11ax HE20, MCS0**

11n HT40, MCS7**11n HT40, MCS0**

11n HT20, MCS7**11n HT20, MCS0**

11g, 54.0**11g, 6.0**

11b, 11.0**11b, 1.0**

1.12.6 WLAN Tx frequency tolerance

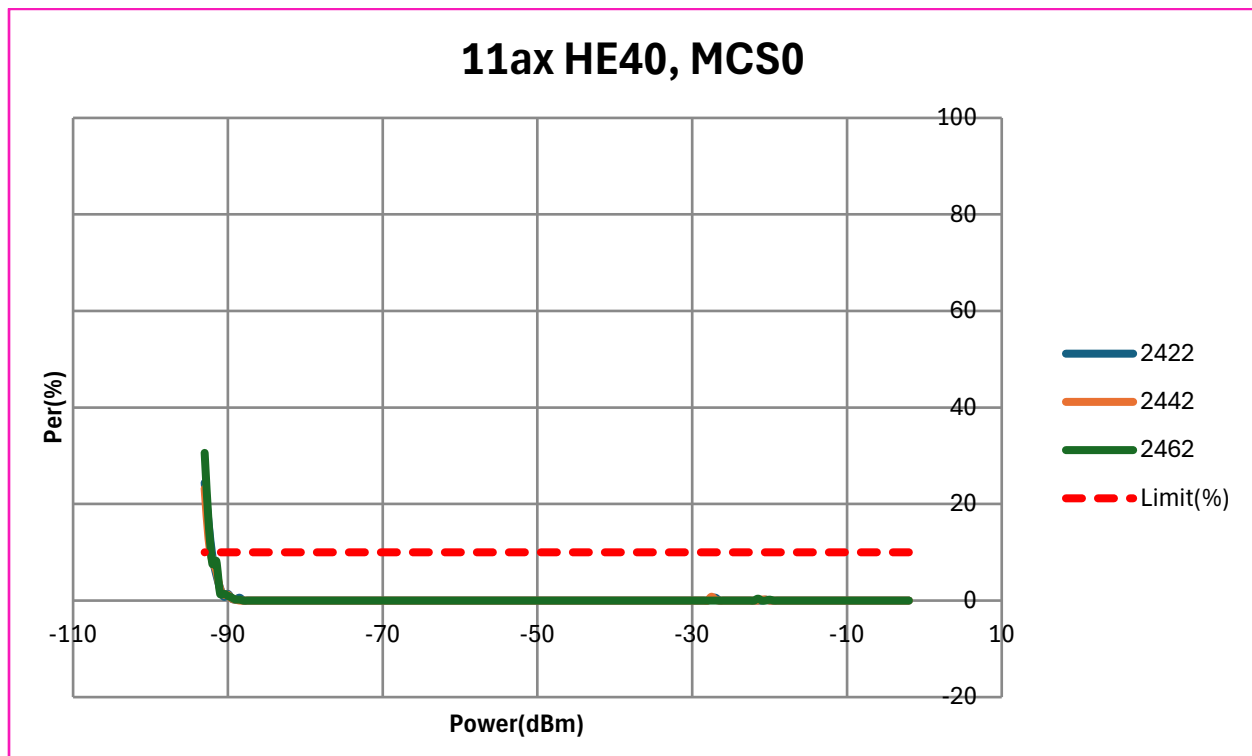
UUT_ID	2.4 GHz	
	Min (freqErr)	Max (freqErr)
D0365_CRYSTAL	-10	10
D0386_CRYSTAL	-10	10

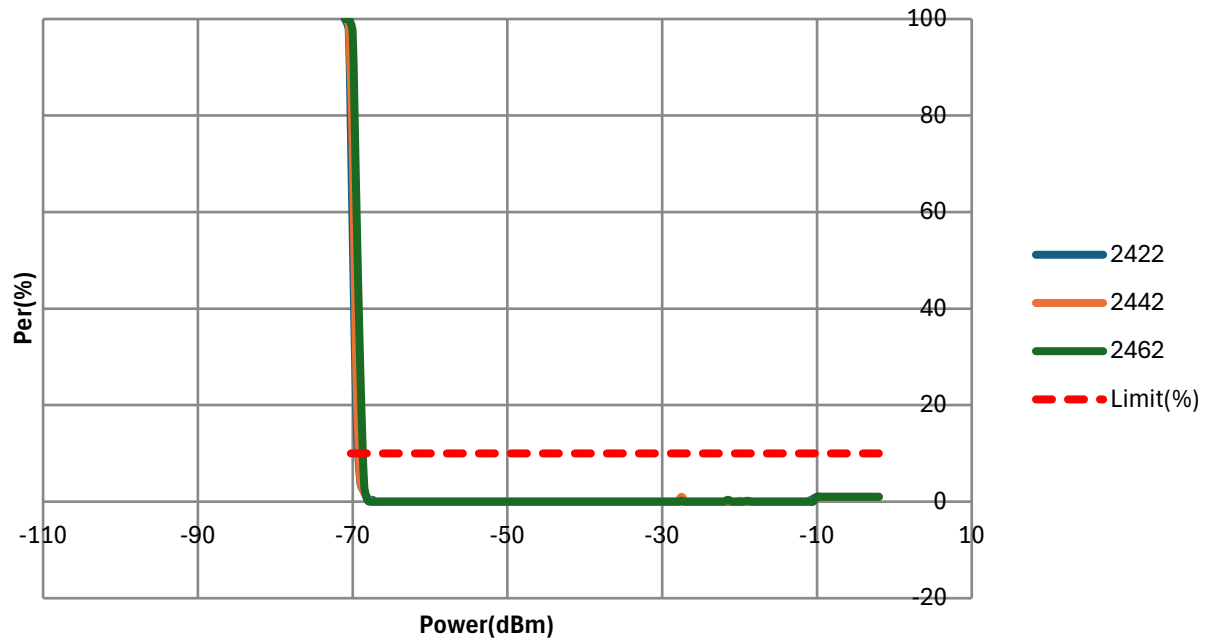
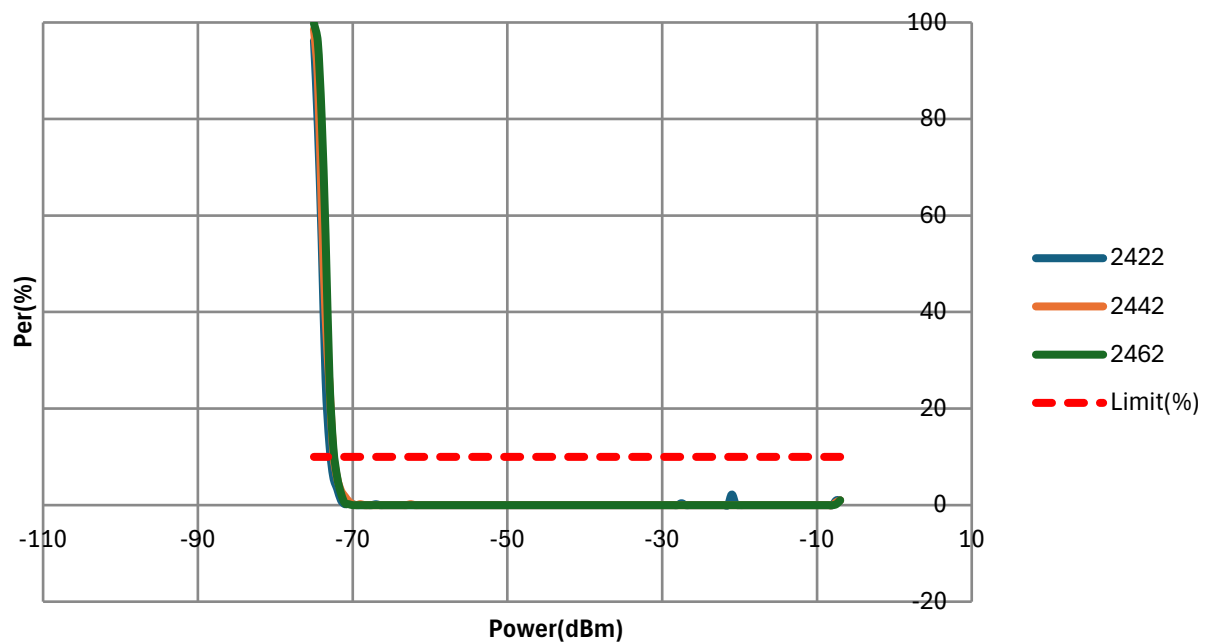
1.12.7 WLAN Rx test summary

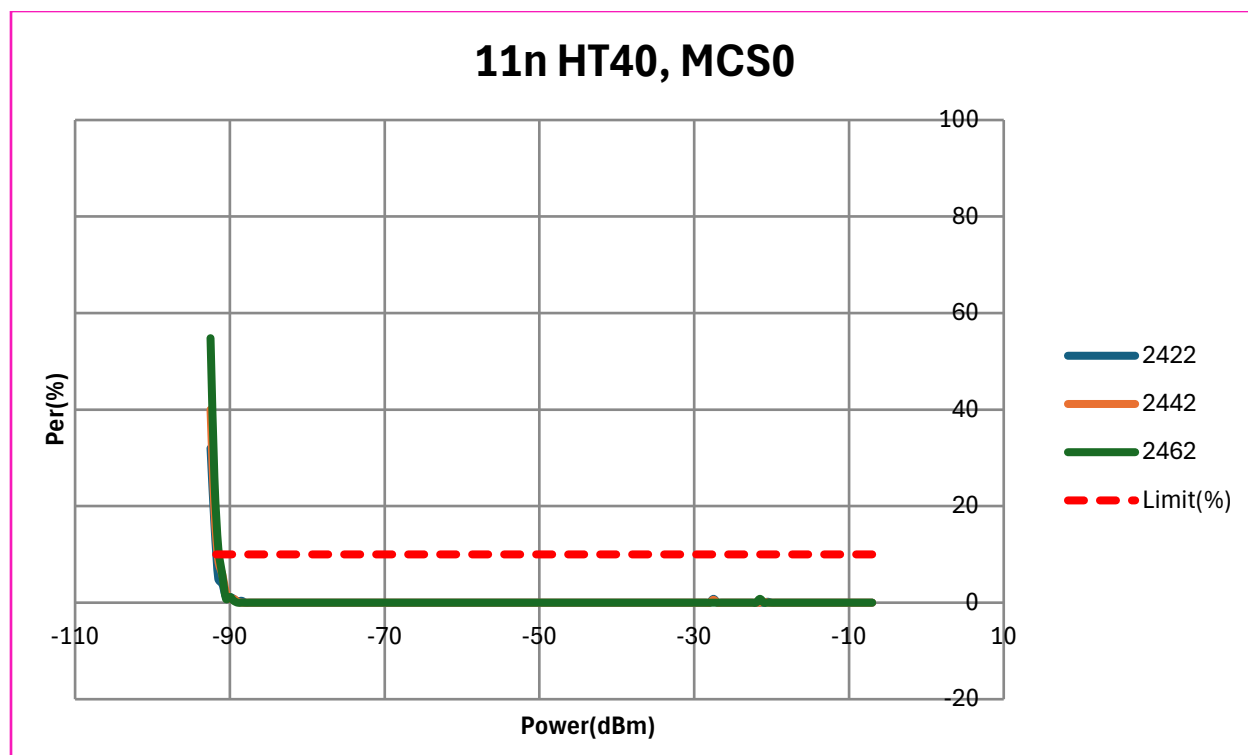
Rate name	Nss	Nrx	Median (PerPower)		
			-40deg	25deg	85deg
11B_LONG_1_MBPS	-	1	-99	-99	-98
11B_LONG_11_MBPS	-	1	-91	-90.5	-89
11A_6_MBPS	-	1	-95	-93.5	-92.5
11A_54_MBPS	-	1	-78	-78	-76
11N_HT20_MCS0	1	1	-94.5	-93	-92.5
11N_HT20_MCS7	1	1	-75	-75	-73.5
11N_HT40_MCS0	1	1	-95	-90	-93.5
11N_HT40_MCS7	1	1	-72	-72.5	-70
11ax_HE20_MCS0	1	1	-91.5	-93	-89.5
11ax_HE20_MCS9	1	1	-72.5	-72	-71
11ax_HE40_MCS0	1	1	-92	-90	-90.5
11ax_HE40_MCS9	1	1	-69	-69	-68

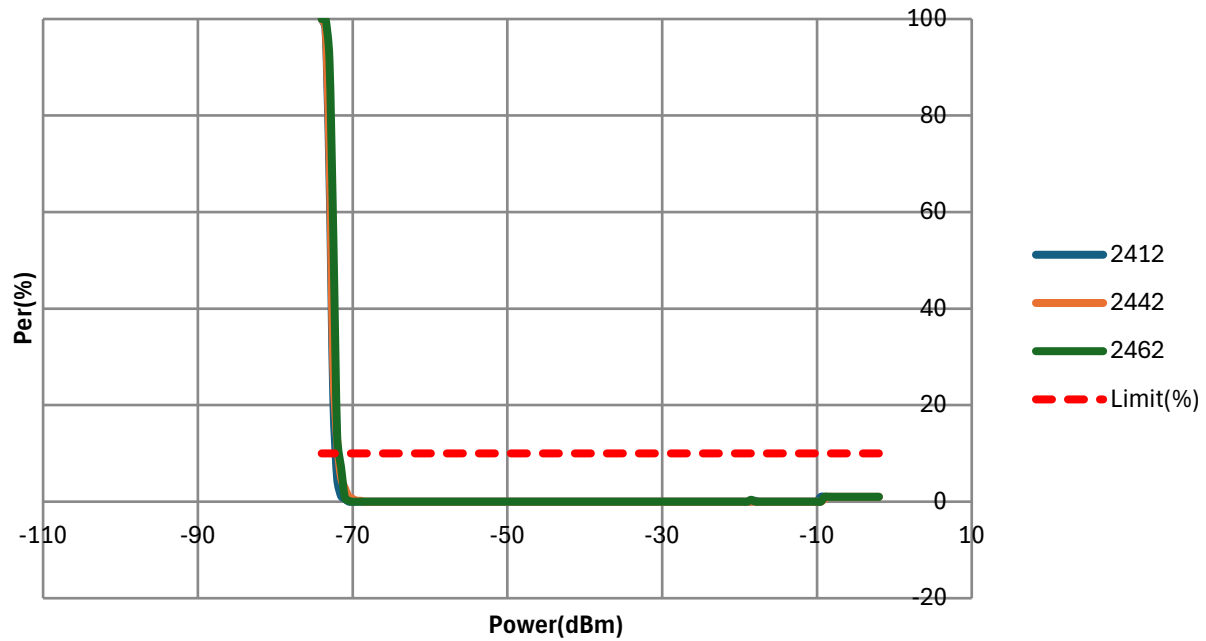
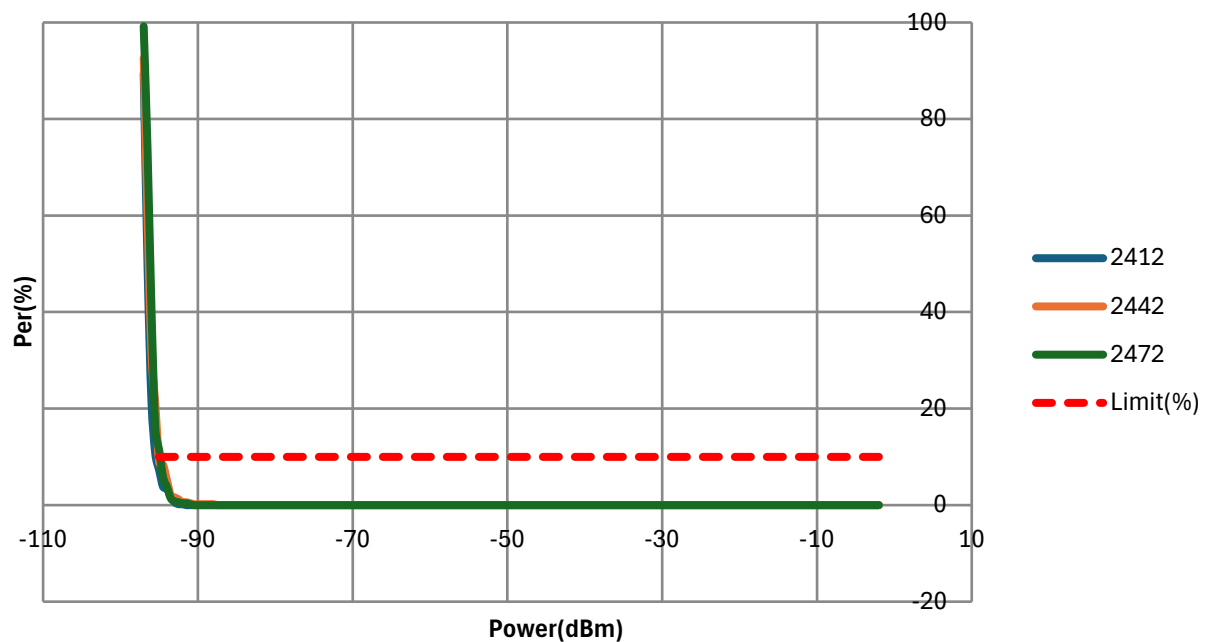
1.12.8 WLAN waterfall plots

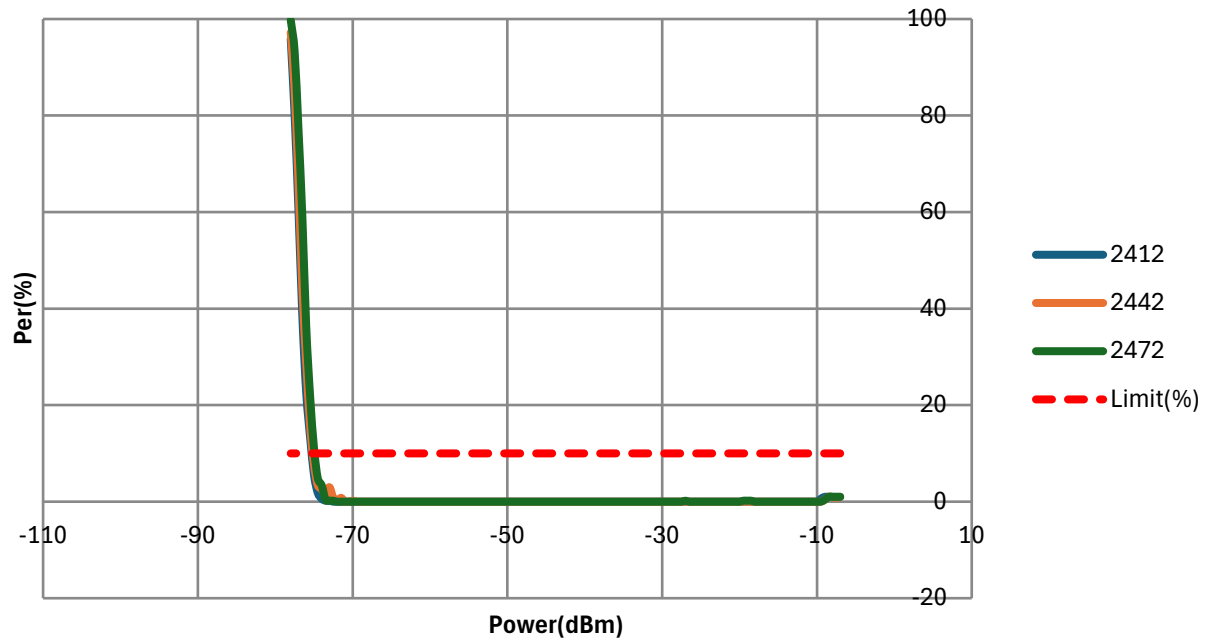
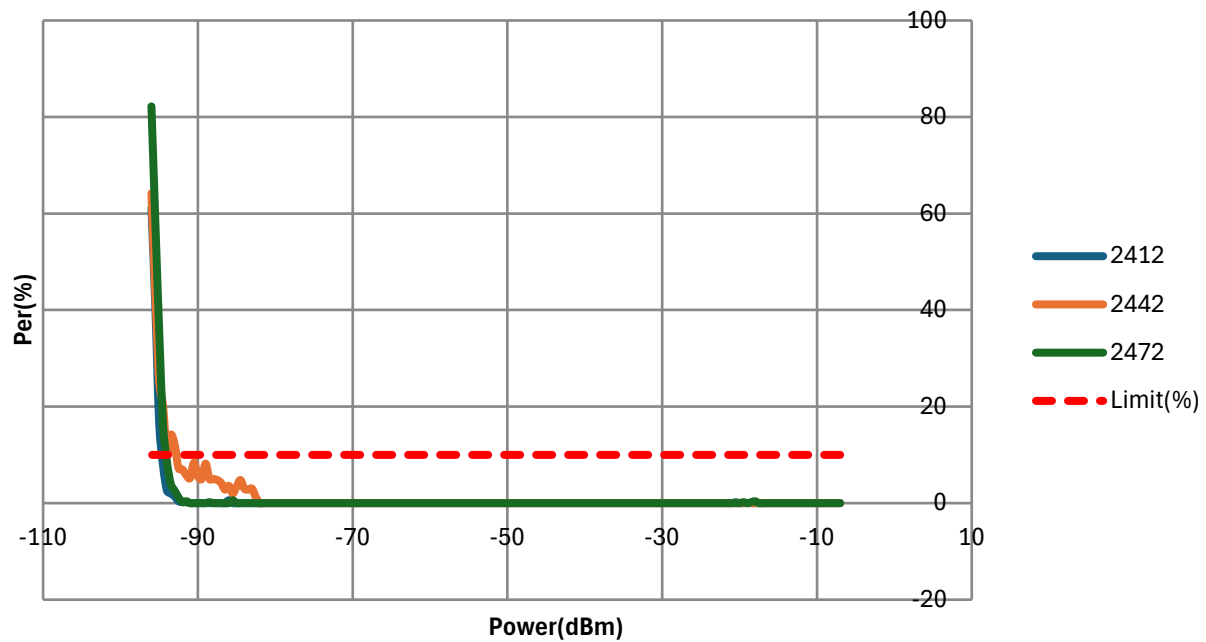
-40deg

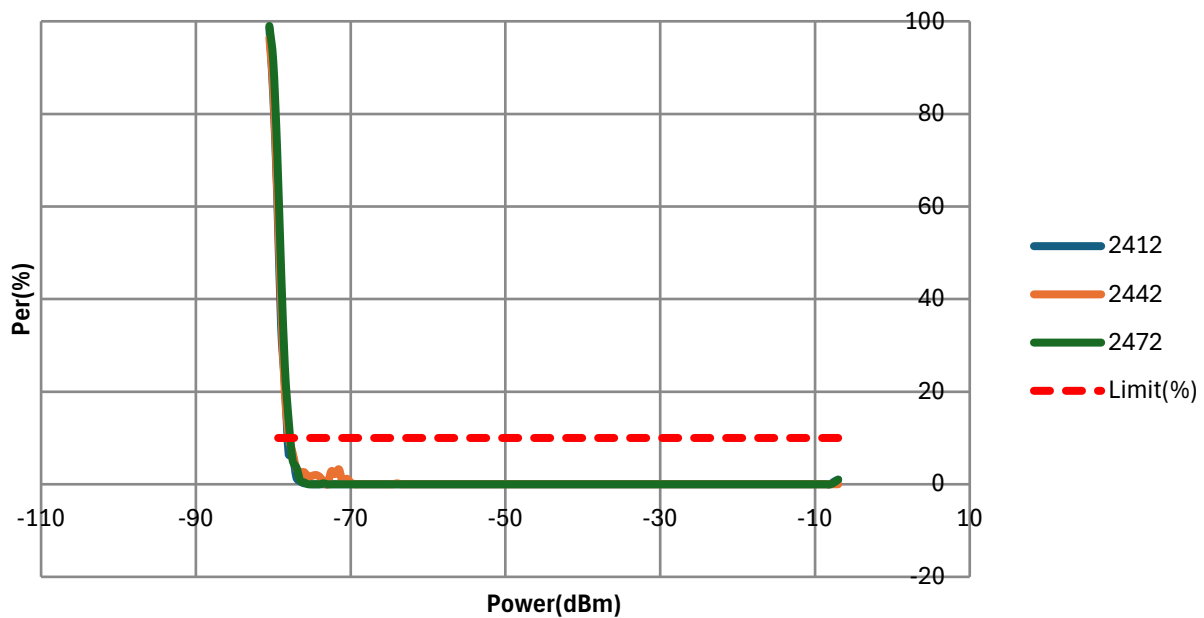
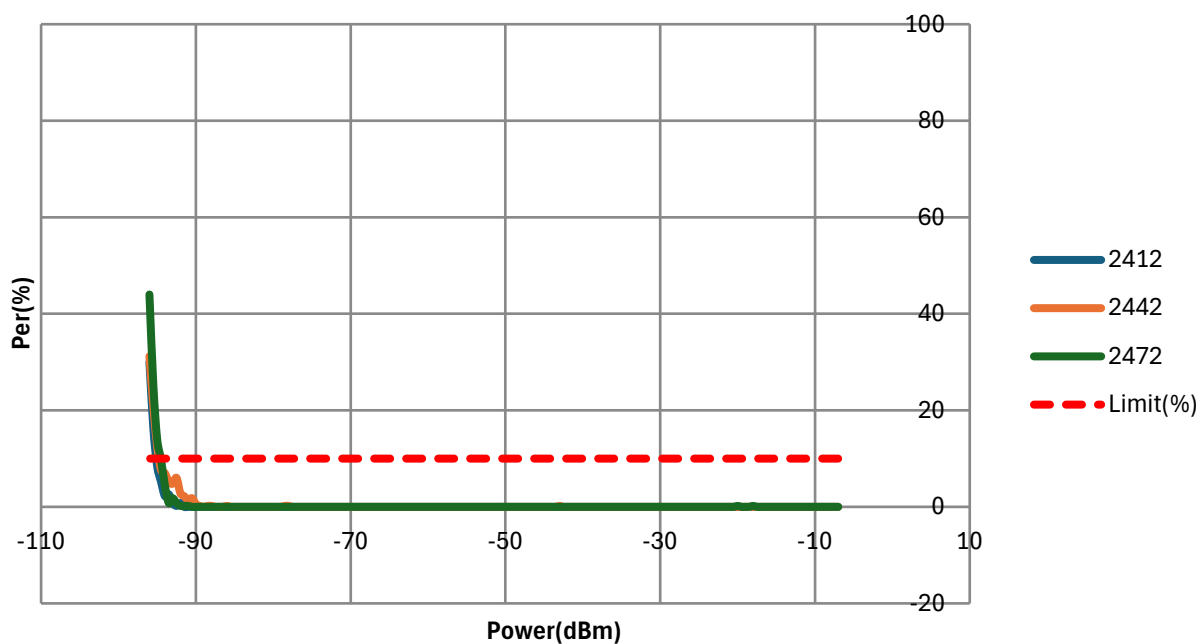


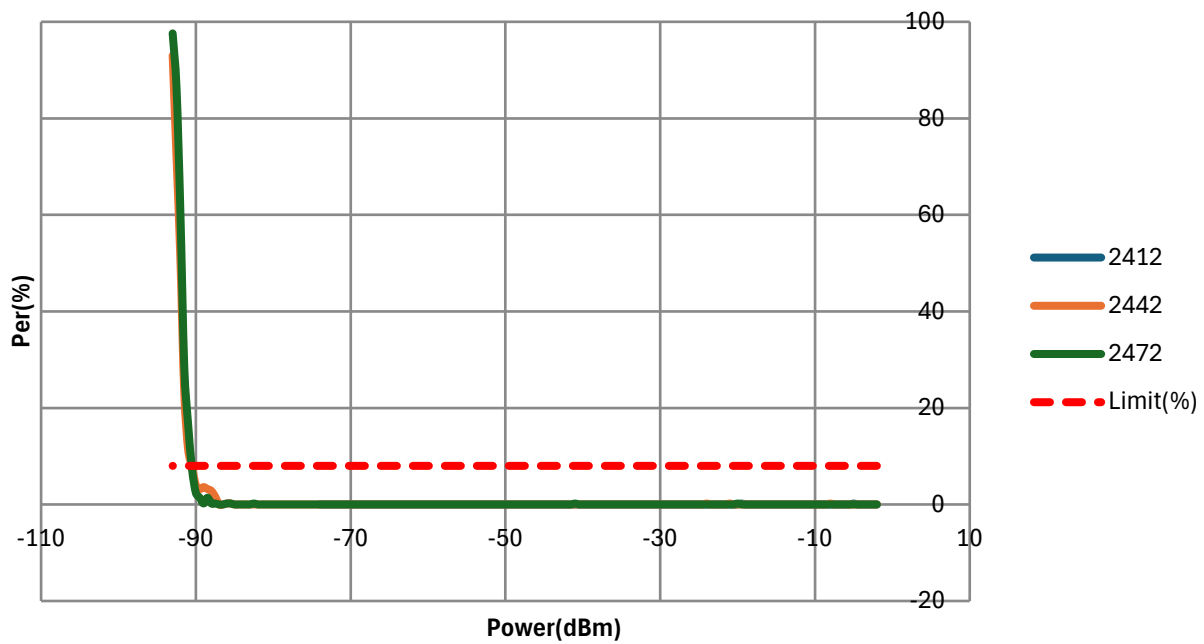
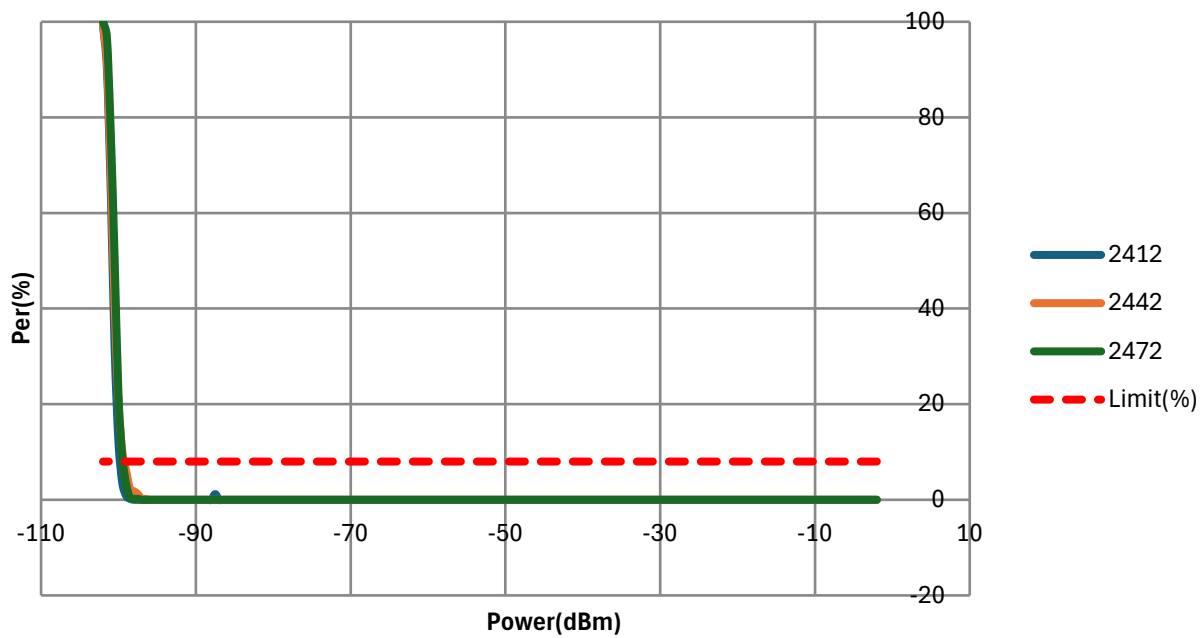
11ax HE40, MCS9**11n HT40, MCS7**



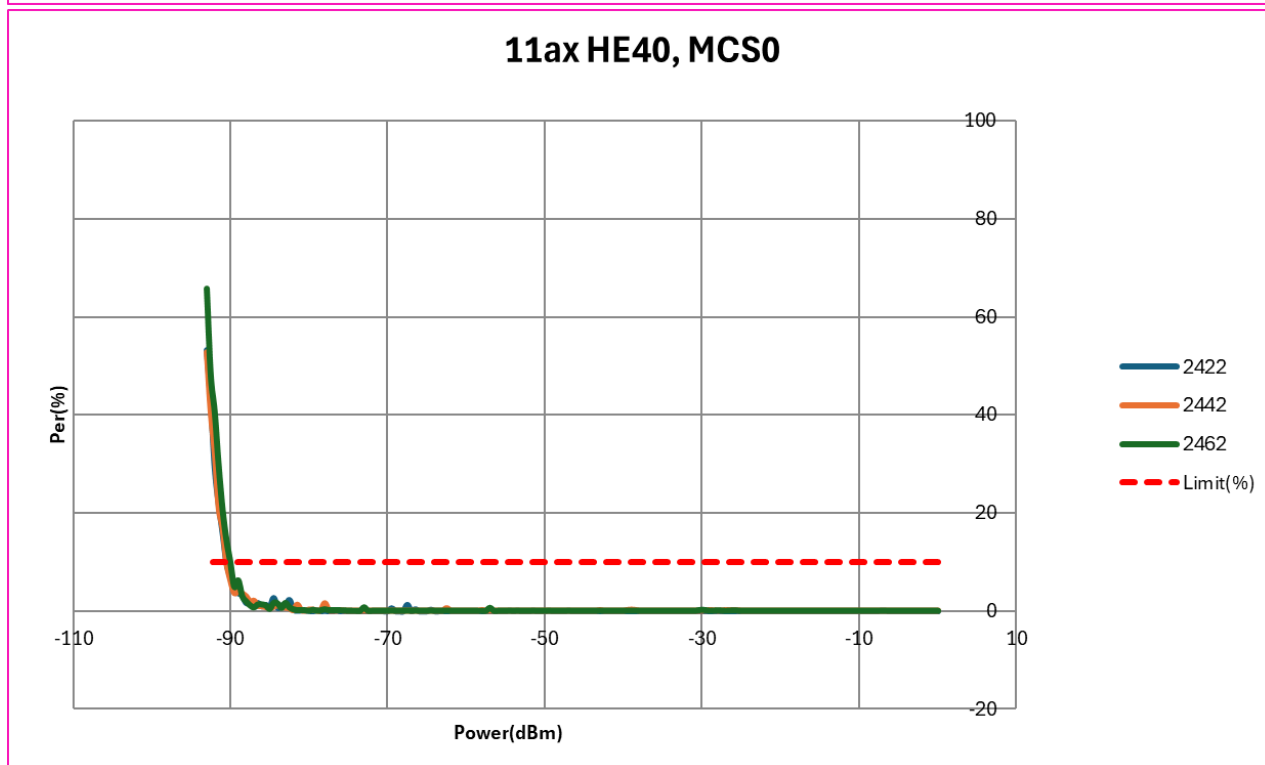
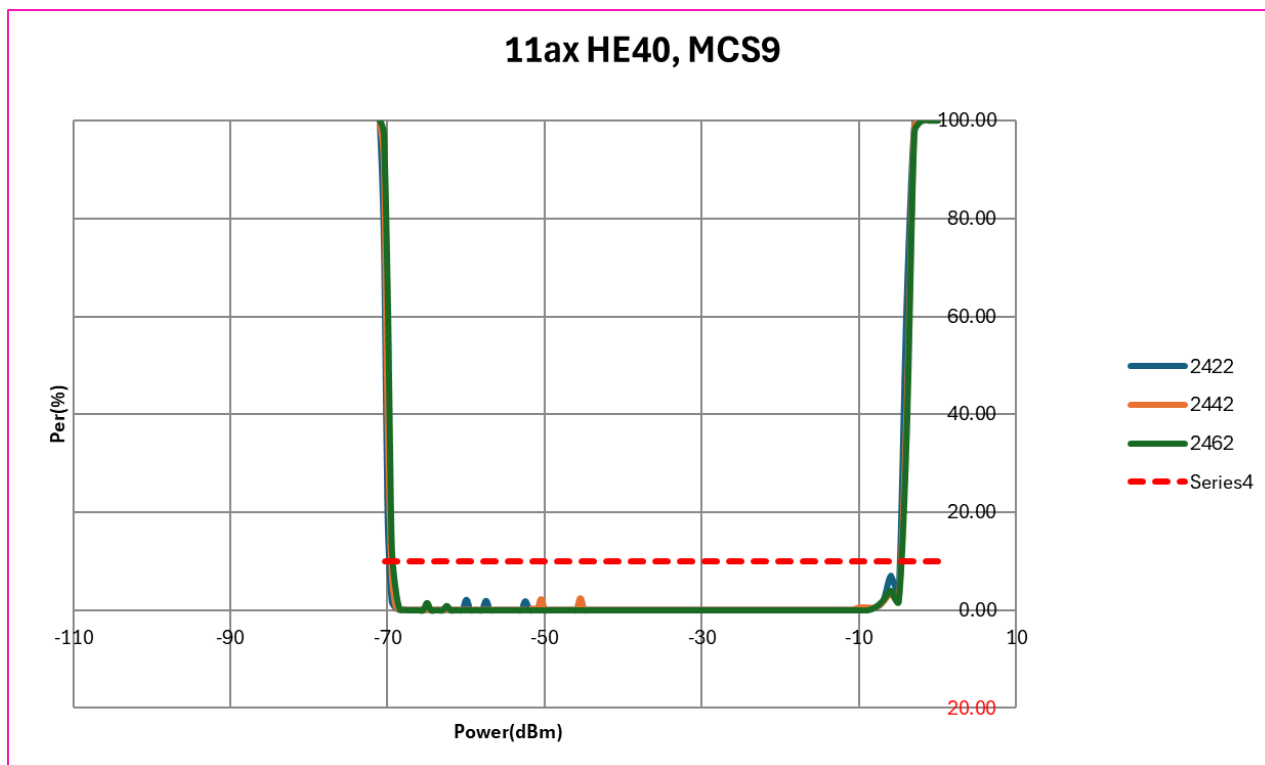
11ax HE20, MCS9**11ax HE20, MCS0**

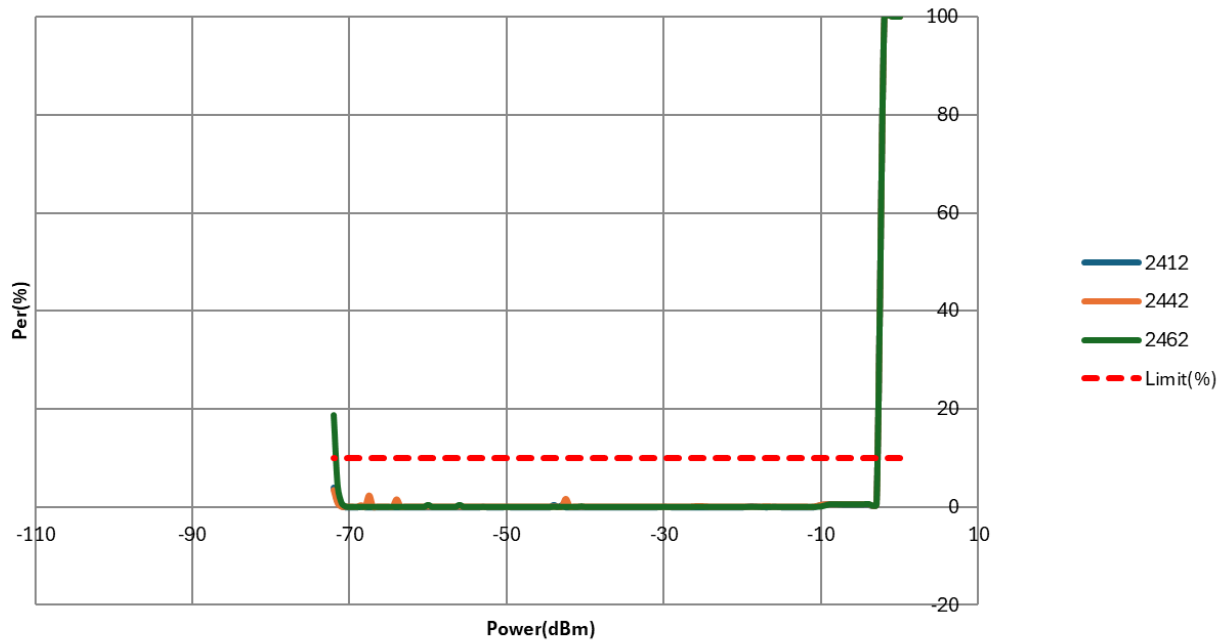
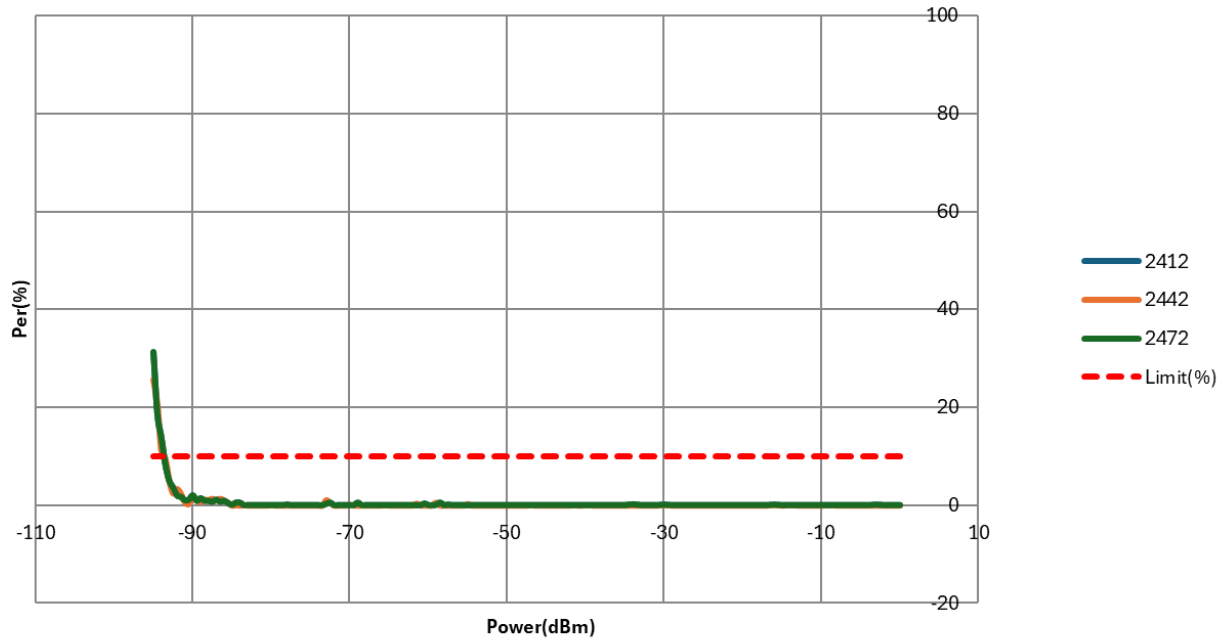
11n HT20, MCS7**11n HT20, MCS0**

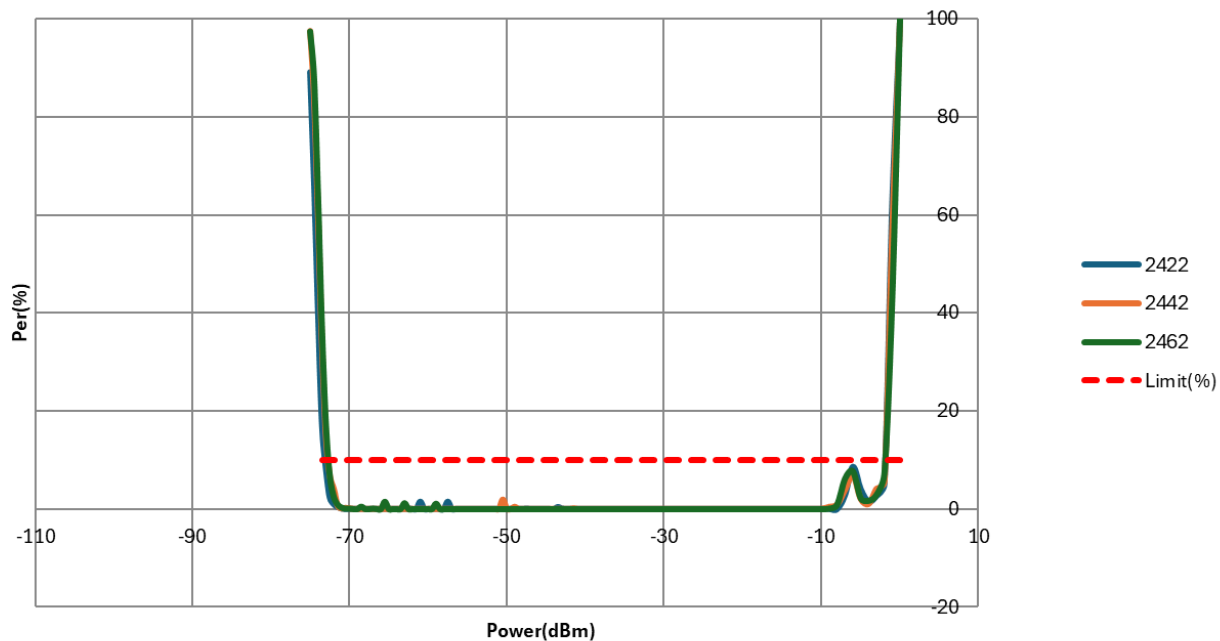
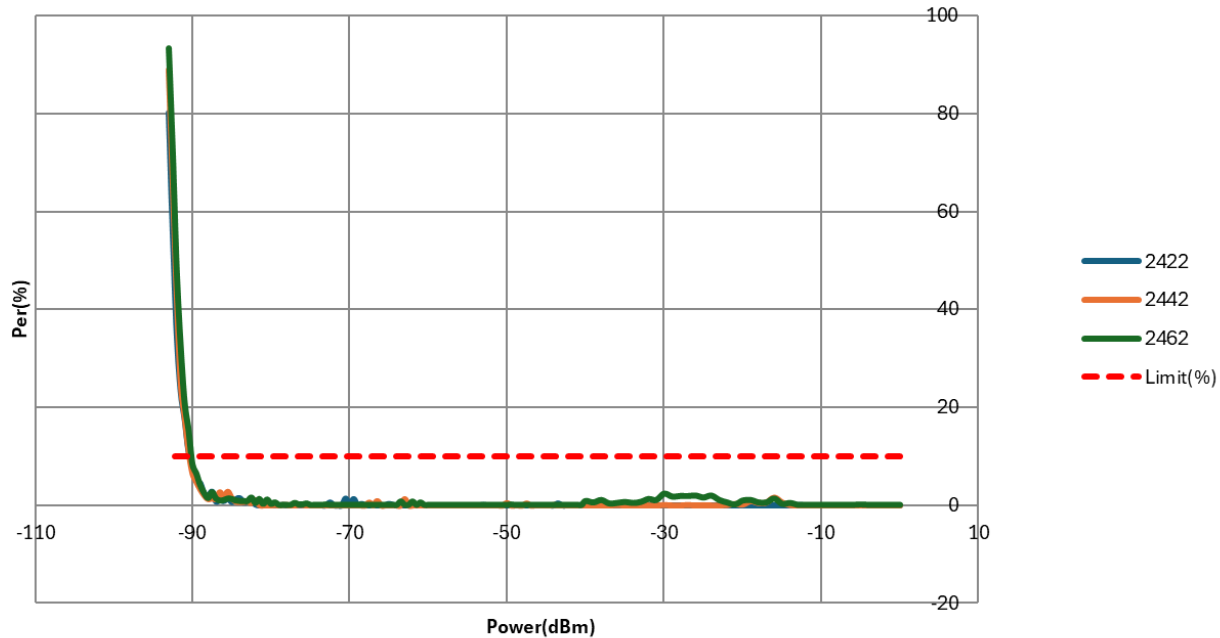
11g, 54Mbps**11g, 6Mbps**

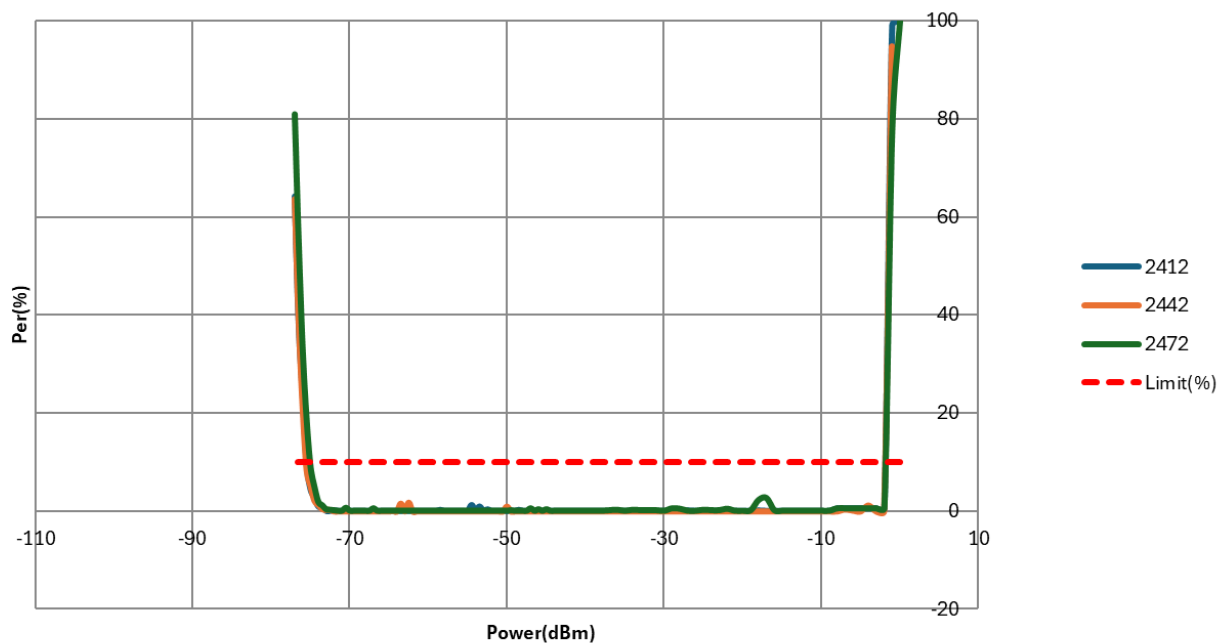
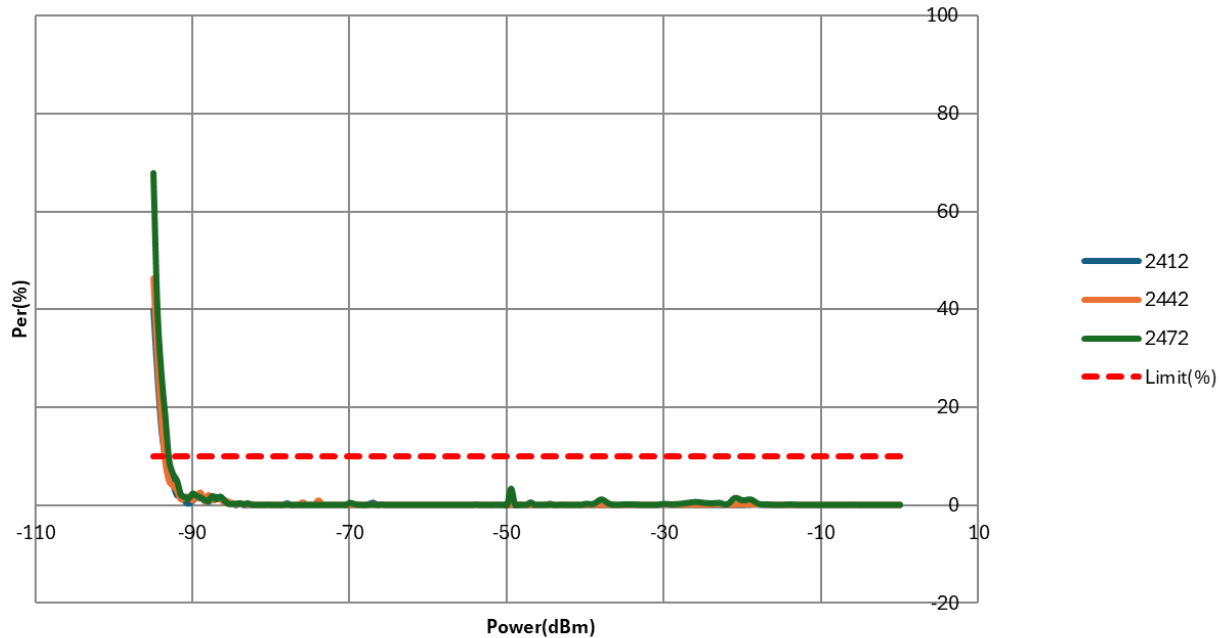
11b, 11Mbps**11b, 1Mbps**

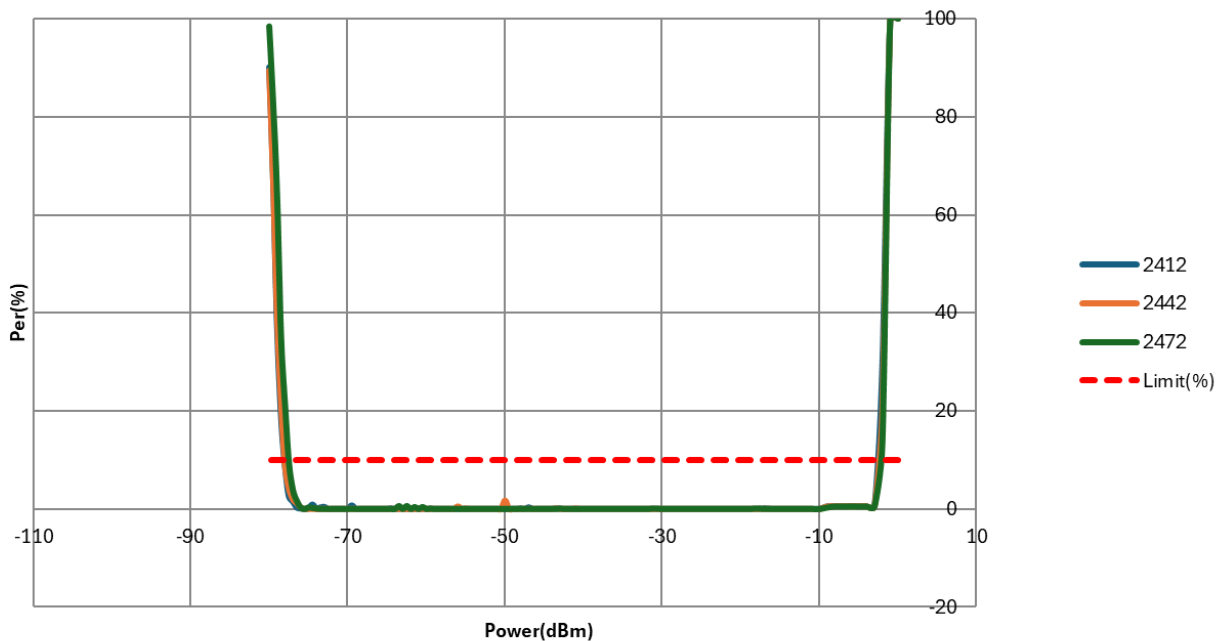
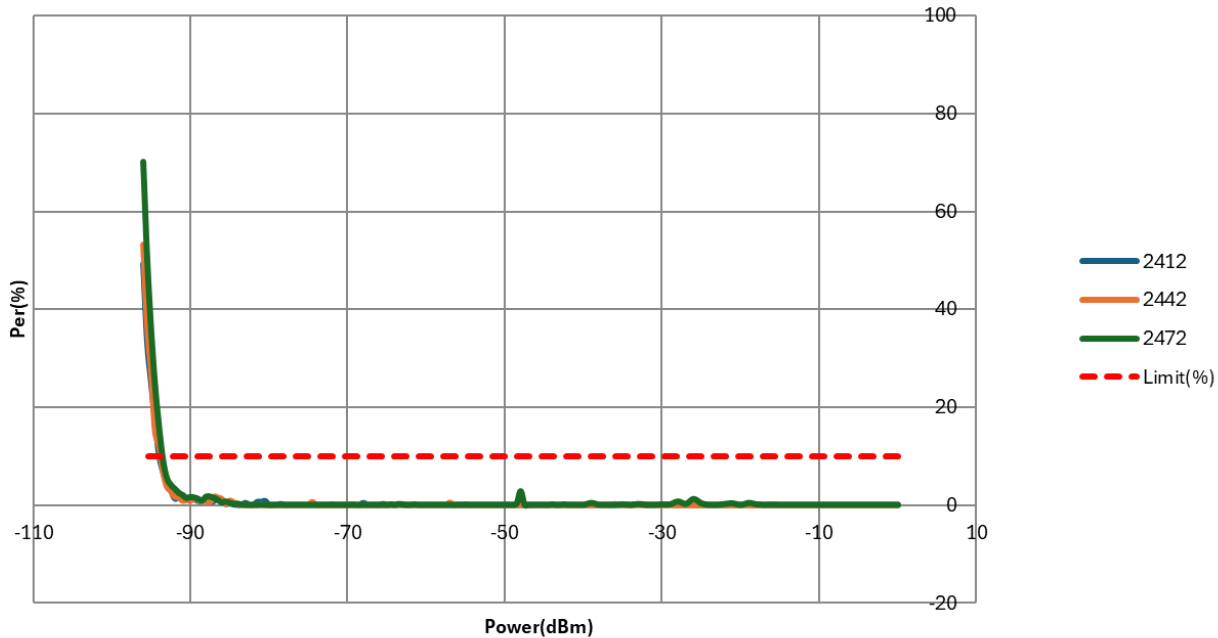
25deg

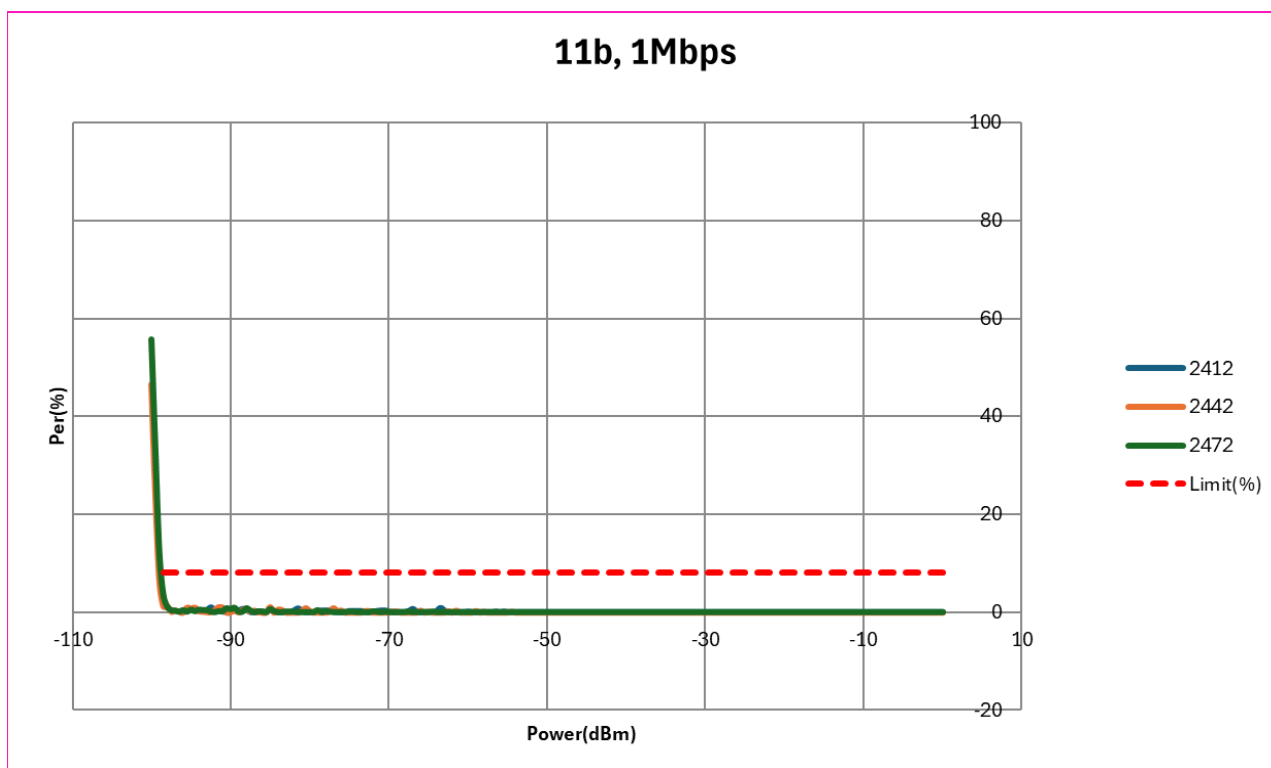


11ax HE20, MCS9**11ax HE20, MCS0**

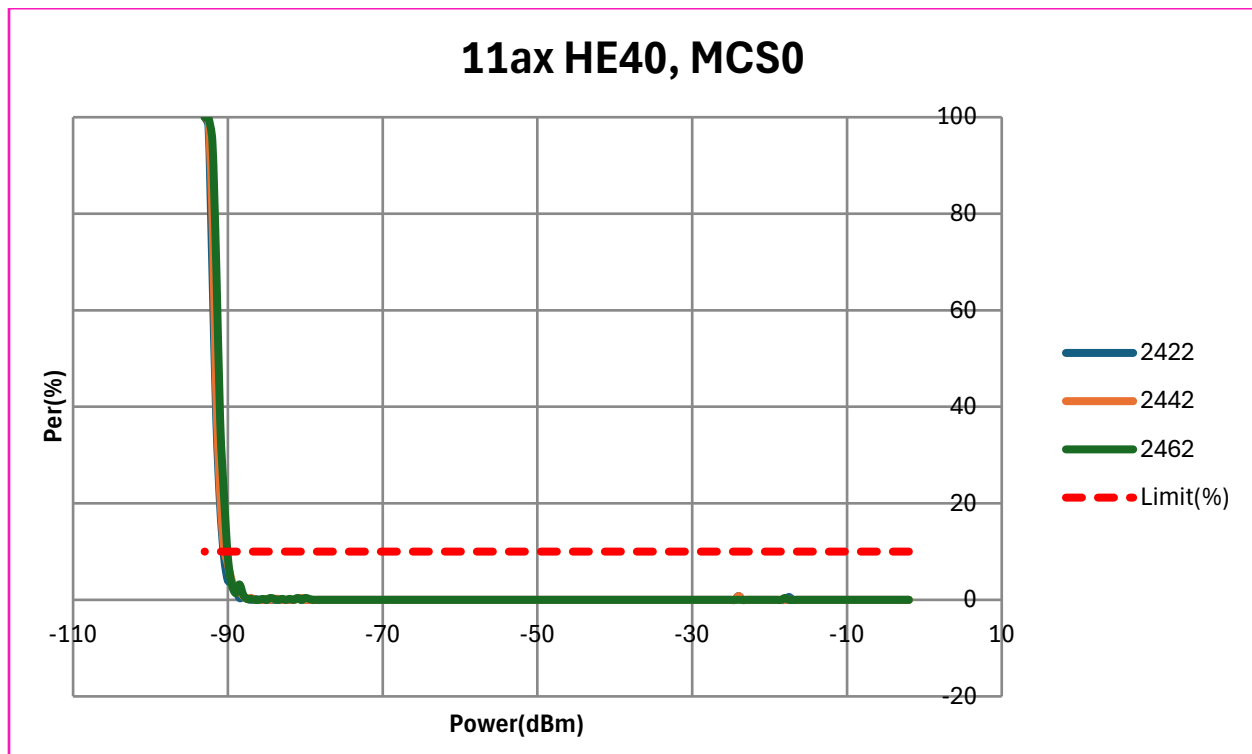
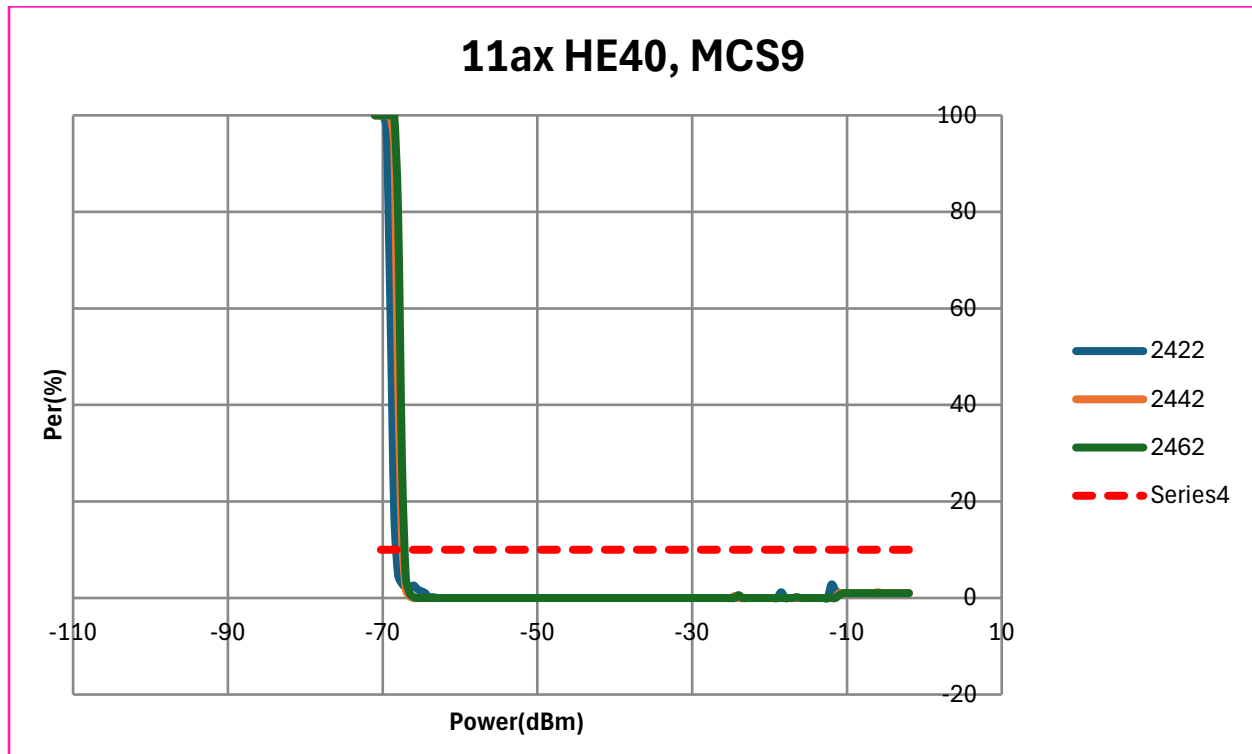
11n HT40, MCS7**11n HT40, MCS0**

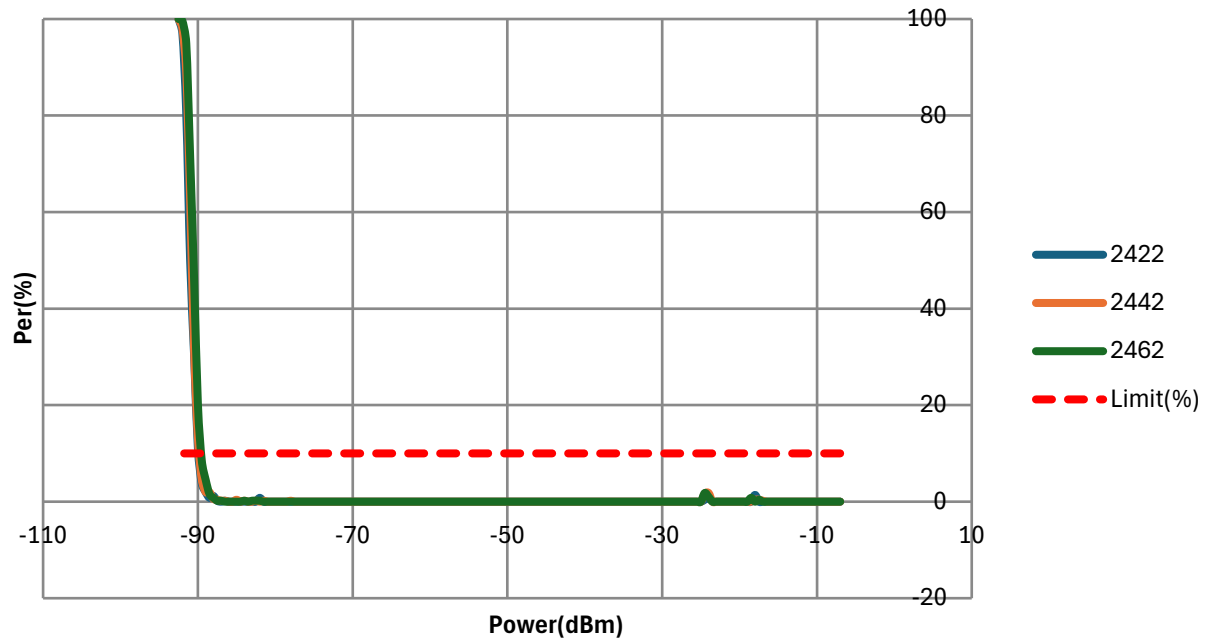
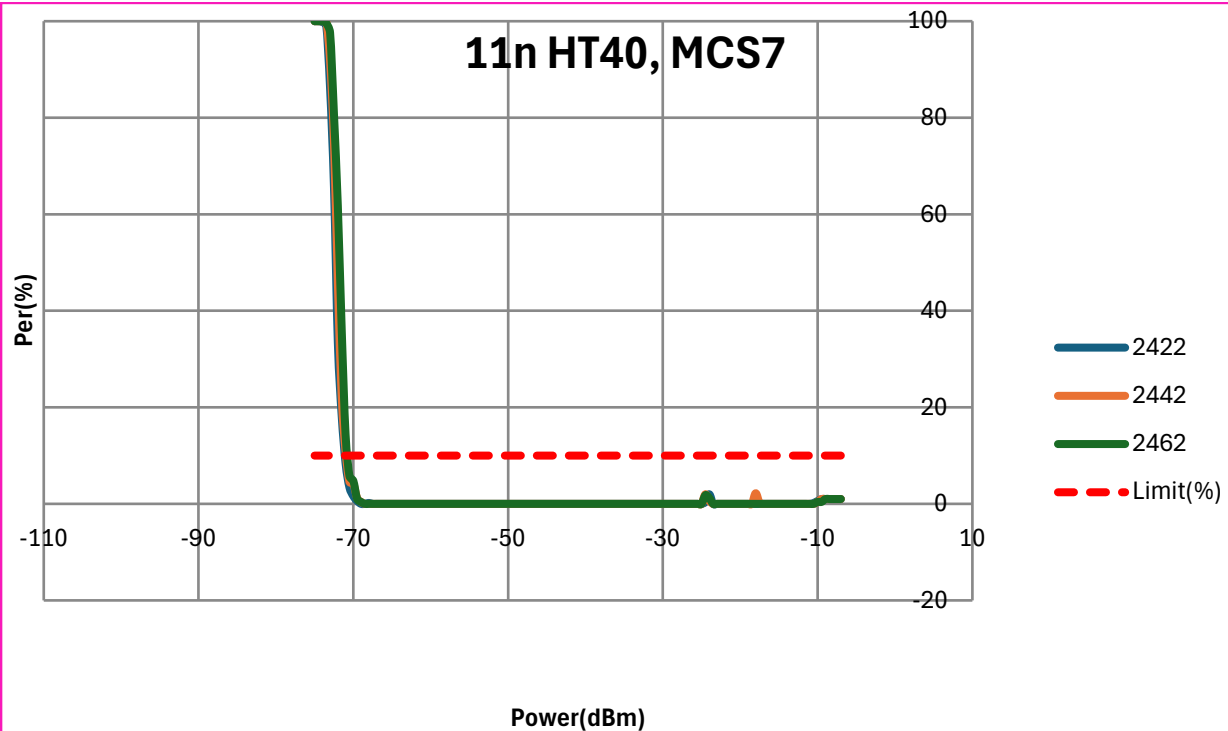
11n HT20, MCS7**11n HT20, MCS0**

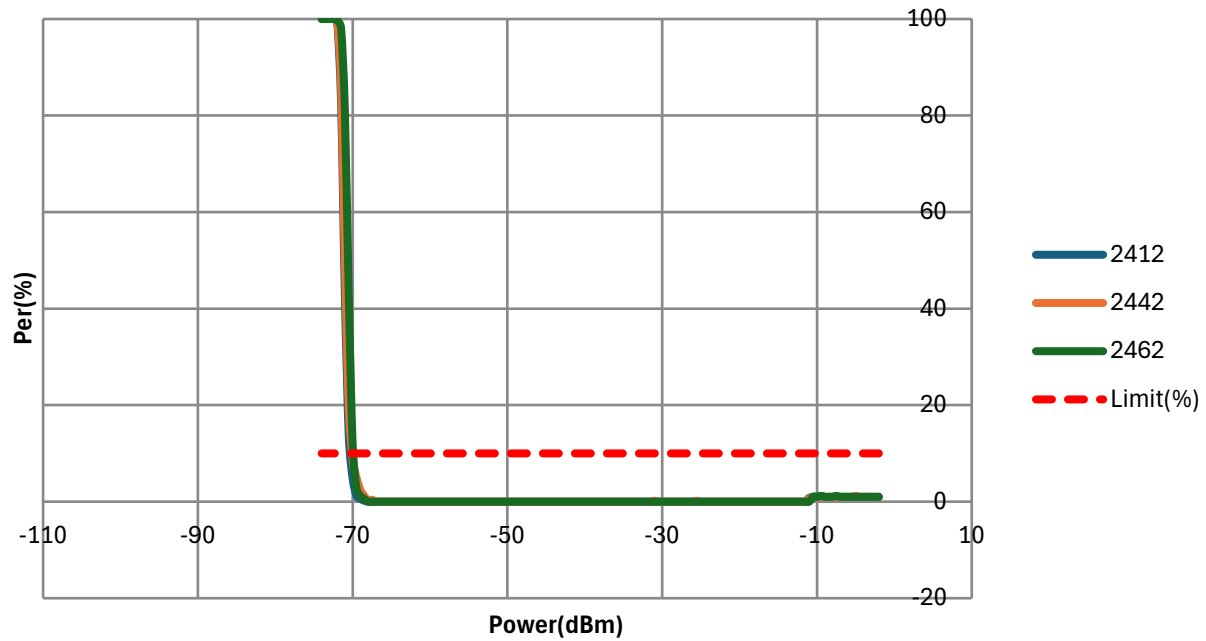
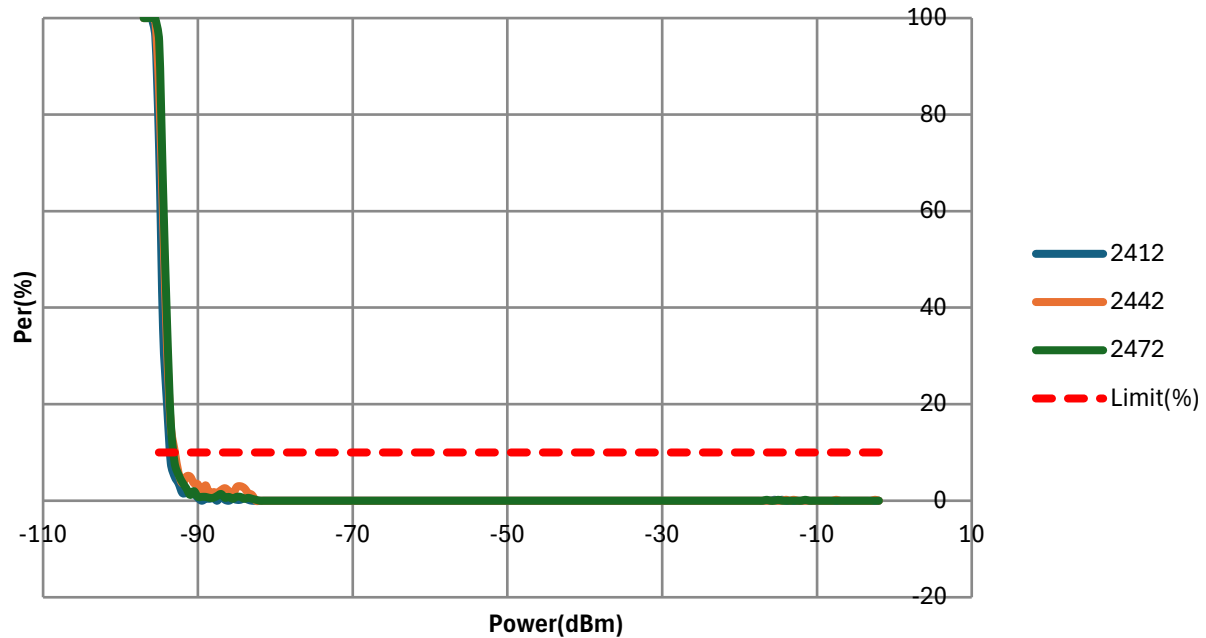
11g, 54Mbps**11g, 6Mbps**

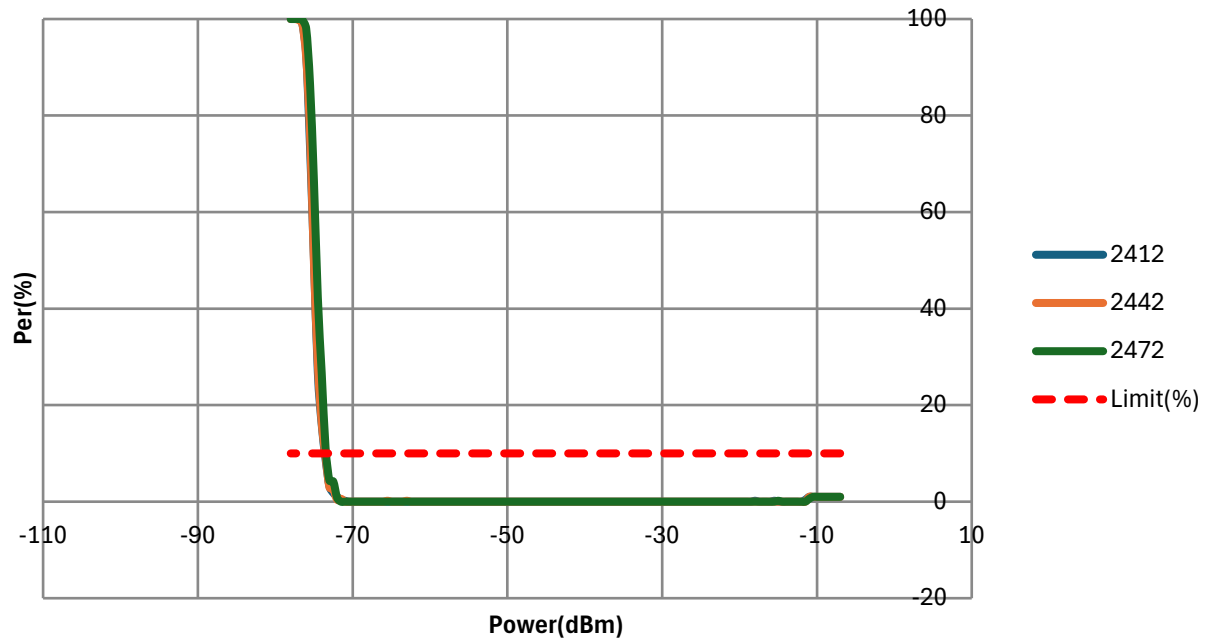
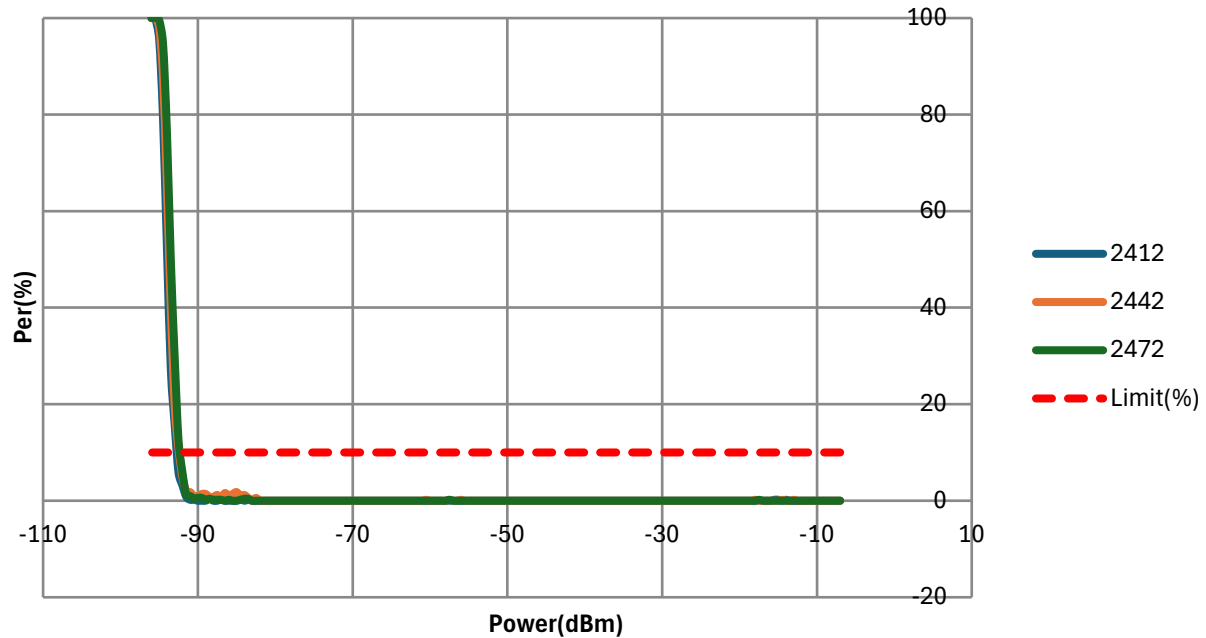


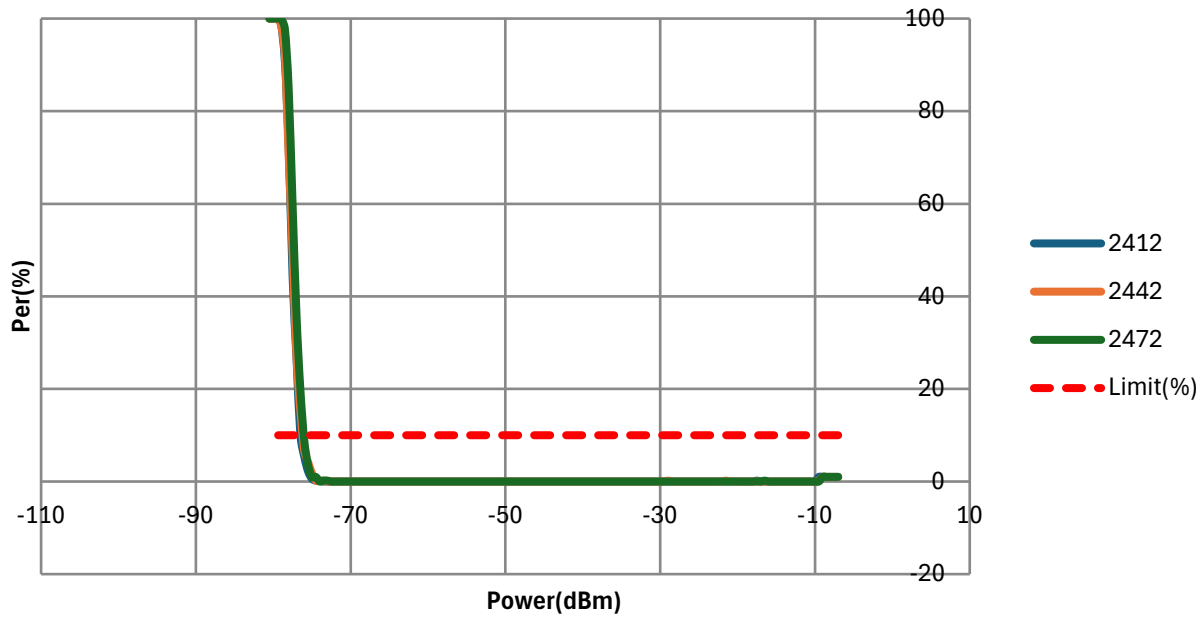
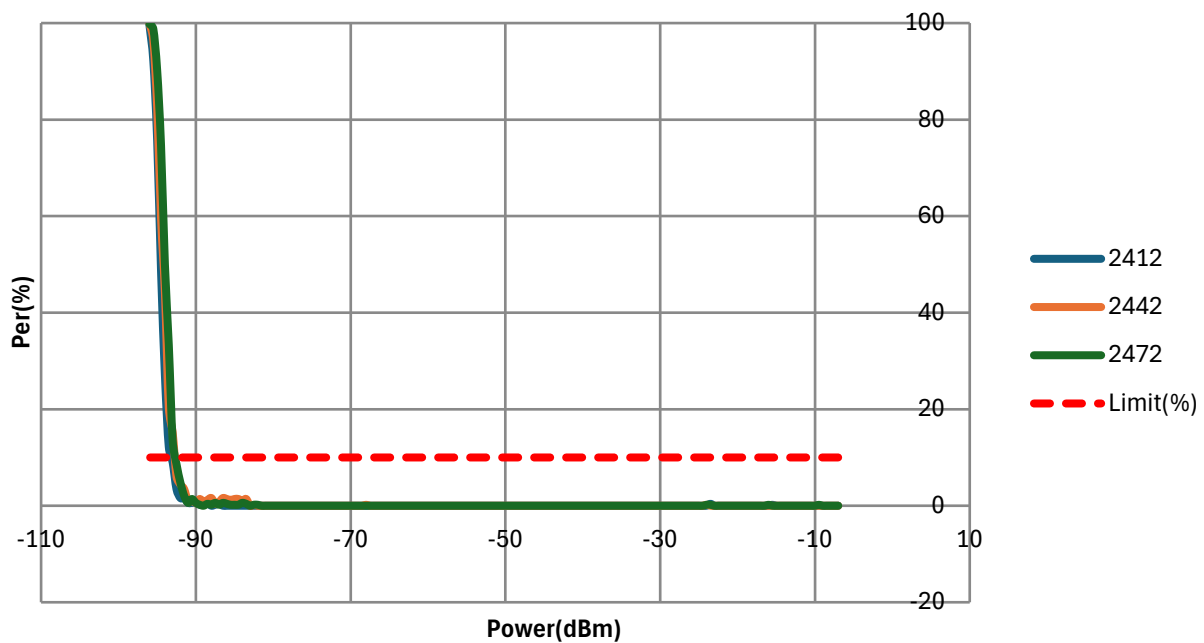
85deg

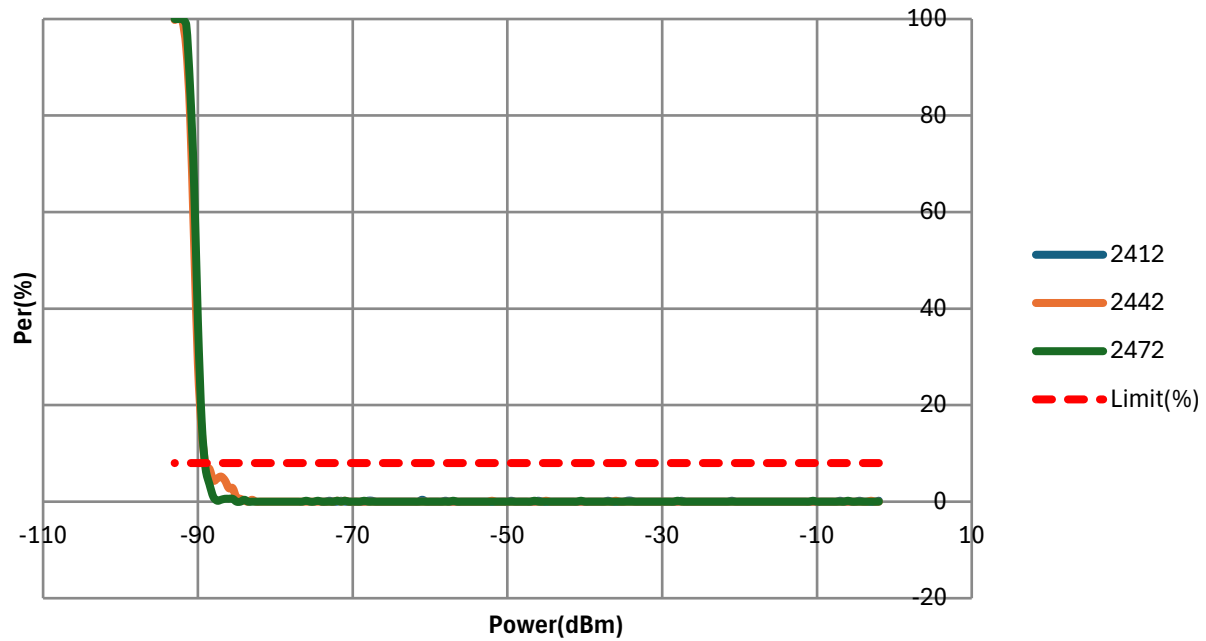
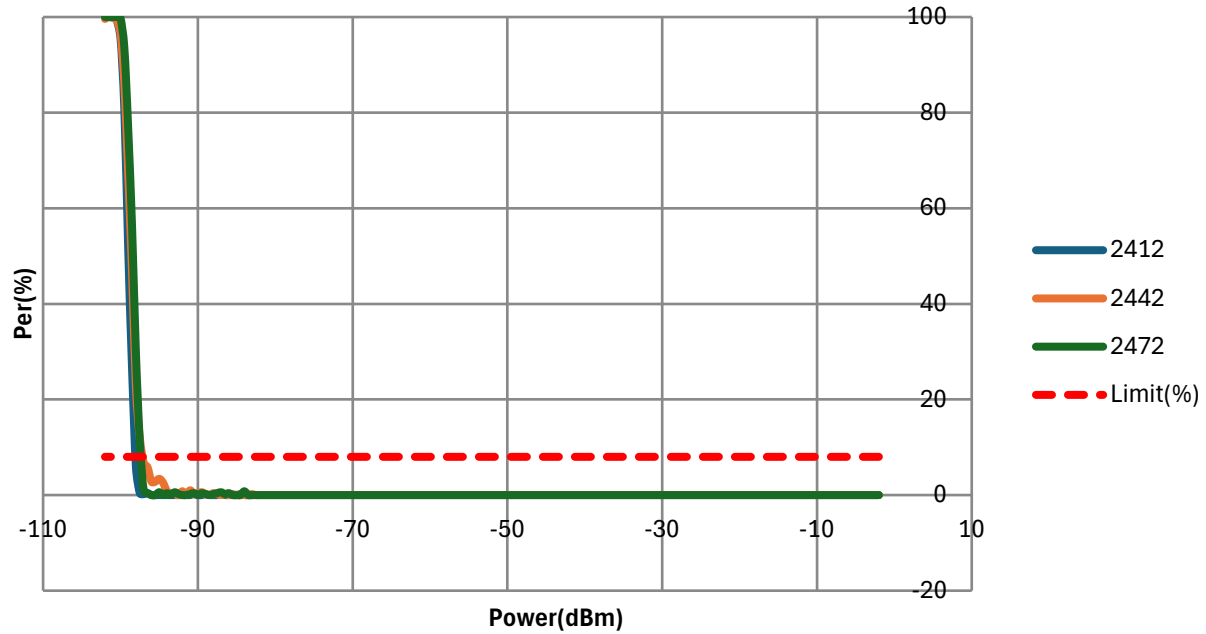


11n HT40, MCS0**11n HT40, MCS7**

11ax HE20, MCS9**11ax HE20, MCS0**

11n HT20, MCS7**11n HT20, MCS0**

11g, 54Mbps**11g, 6Mbps**

11b, 11Mbps**11b, 1Mbps**

2 Bluetooth and Bluetooth Low Energy DVT

This chapter describes the hardware Bluetooth and Bluetooth Low Energy (BLE) DVT RF design test data for QCC743M.

Test Conditions

- Sample size: 3
- Tx/Rx chain: 1 Tx, 1 Rx
- Test frequencies: 2402 MHz – 2480 MHz
- Sample type: TT

Bench software

QCC740.OR.1.0

DVT specifics

- DVT level: CS

2.1 References and specifications

The documents below are references and specifications utilized for BT and BLE testing.

- *Bluetooth Test Strategy and Terminology Overview*
- *Bluetooth Specification, v4.0 or later, Vol. 6, Part A; Physical Layer Specification*
- *ICS Proforma for Bluetooth Low Energy RF PHY, v1.0 or later*
- *Bluetooth Specification v4.0 or later, Vol. 6, Part F; Direct Test Mode*
- *IXIT Perform or Bluetooth Low Energy Conformance Test Specifications, v4.2 or later*
- *Bluetooth Core Specification Addendum 5, Volume 6, Part A; Physical Layer Specification*
- *Bluetooth Specification v5.0 or later, Vol. 6, Part A; Physical Layer Specification*

2.2 BT and BLE Tx test summary

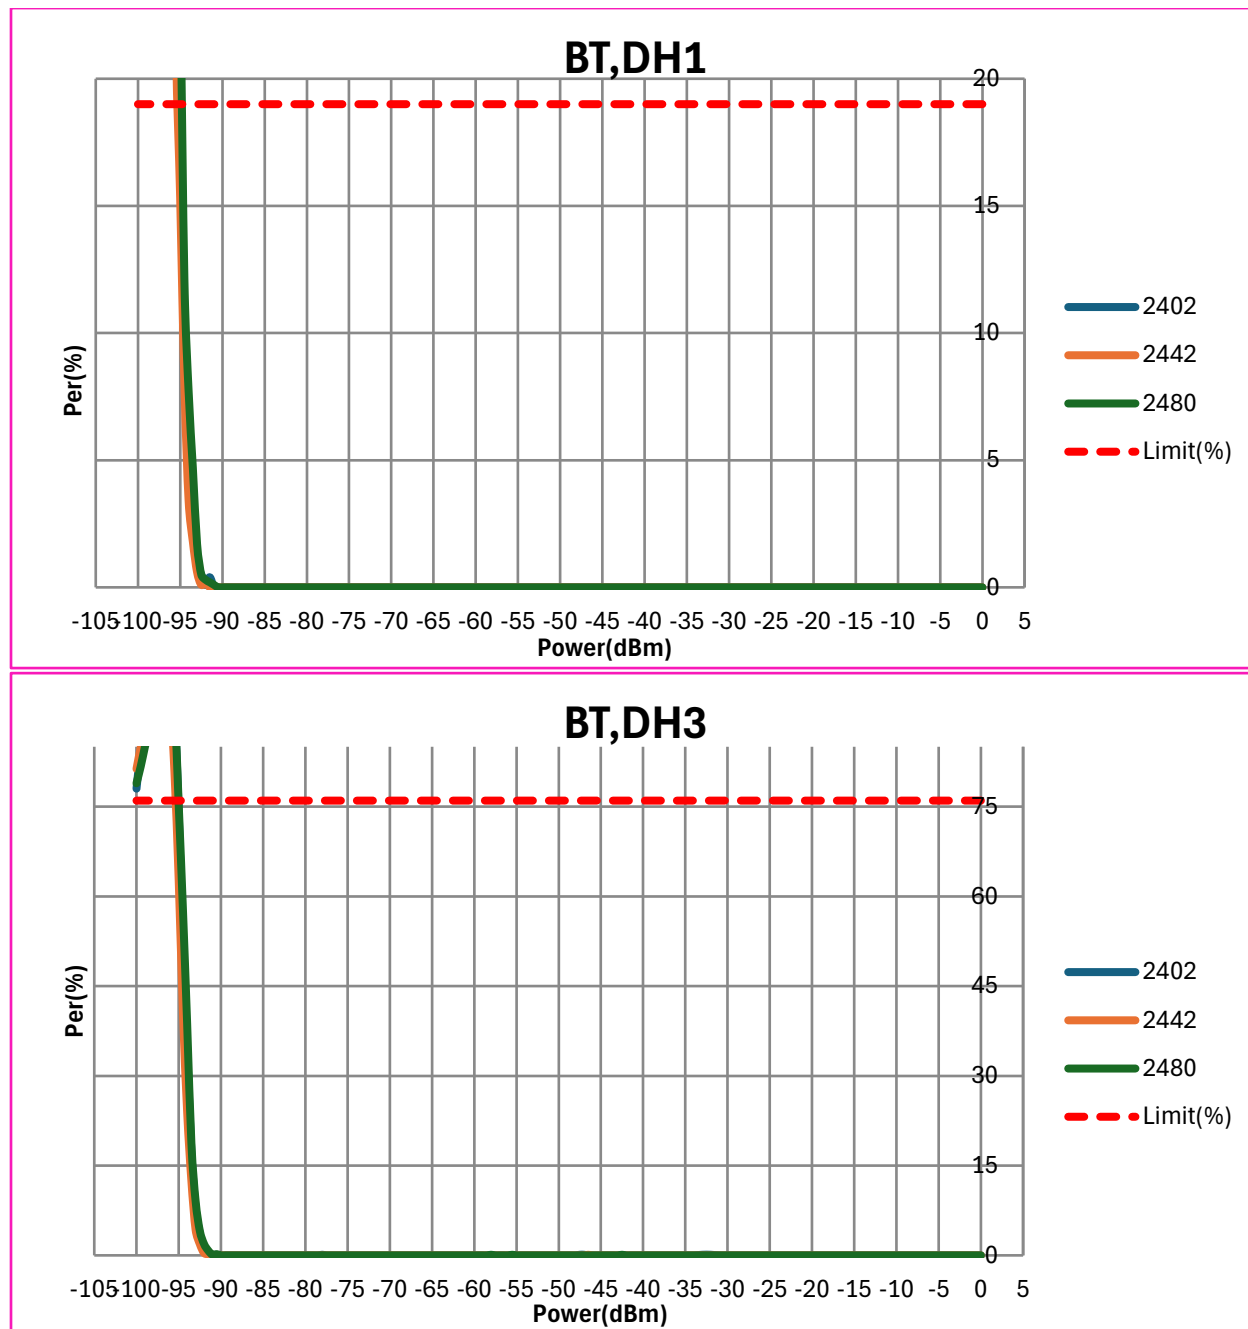
Mode	Test item	Requirements	Channels (-40deg)			Channels (25deg)			Channels (85deg)		
			2402	2441	2480	2402	2441	2480	2402	2441	2480
Output Power	Tx Output Power DH5	10	9.6	9.5	9.5	9.22	9.84	9.52	9.86	9.81	9.94
	Tx Output Power 2DH5	8	7.7	7.5	7.6	7.01	7.61	7.62	7.31	7.96	8.09
	Tx Output Power 3DH5	8	7.7	7.5	7.6	7.01	7.61	7.62	7.31	7.95	8.08
Modulation Characteristics	BR 1Mbps, Δf_{1avg}	160 KHz	158	157.87	157.66	159.38	158.57	157.84	158.79	158.64	157.73
	BR 1Mbps, $\Delta f_{2max} > 115KH$	100%	148.6	147.02	149.29	133.69	134.48	133.63	136.01	136.89	136.58
	BR 1Mbps, $\Delta f_{2avg}/\Delta f_{1avg}$	> 0.85	0.94	0.93	0.94	0.89	0.89	0.88	0.9	0.9	0.91
	EDR 2Mbps, RMS DEVM	<5	3.30%	3.20%	3.20%	3.67%	3.3%	3.43%	3.58%	3.22%	3.46%
	EDR 2Mbps, Peak DEVM	<10	5.40%	5.80%	5.50%	5.23%	5.25%	4.95%	5.29%	5.03%	5.36%
	EDR 2Mbps, 99% DEVM	<8	0.05	0.05	0.05	0.03	0.03	0.03	0.03	0.03	0.03
	EDR 3Mbps, RMS DEVM	<5	3.10%	3.10%	3.10%	3.01%	3.81%	2.99%	3.5%	3.09%	3.51%
	EDR 3Mbps, Peak DEVM	<10	5.70%	5.50%	5.70%	5.55%	5.85%	4.82%	5.24%	5.35%	5.59%
	EDR 3Mbps, 99% DEVM	<8	0.05	0.05	0.05	0.04	0.03	0.03	0.03	0.03	0.03
In-Band Emission	EDR 2Mbps, $F = F_0 \pm 2MHz$	-39	-43.04	-43.46	-43.38	-40.08	-40.49	-40.73	-40.02	-41.01	-40.76
	EDR 2Mbps, $F = F_0 \pm 3MH$	-43	-51.32	-52.59	-53.34	-48.03	-48.13	-48.31	-50.18	-50.32	-49.86
	EDR 3Mbps, $F = F_0 \pm 2MH$	-38	-43.09	-44.32	-43.26	-39.26	-39.64	-40.38	-38.88	-38.74	-38.98
	EDR 3Mbps, $F = F_0 \pm 3MH$	-43	-51.55	-53.34	-53.23	-46.42	-46.62	-46.25	-46.73	-46.67	-46.62
Adjacent Channel Power	BR 1Mbps, $F = F_0 \pm 2MH$	-48	-52.65	-53.49	-52.77	-45.51	-45.48	-45.45	-45.66	-45.88	-45.55
	BR 1Mbps, $F = F_0 \pm 3MH$	-48	-54.93	-56.84	-56.9	-49.48	-49.67	-49.51	-50.26	-50.47	-50.37

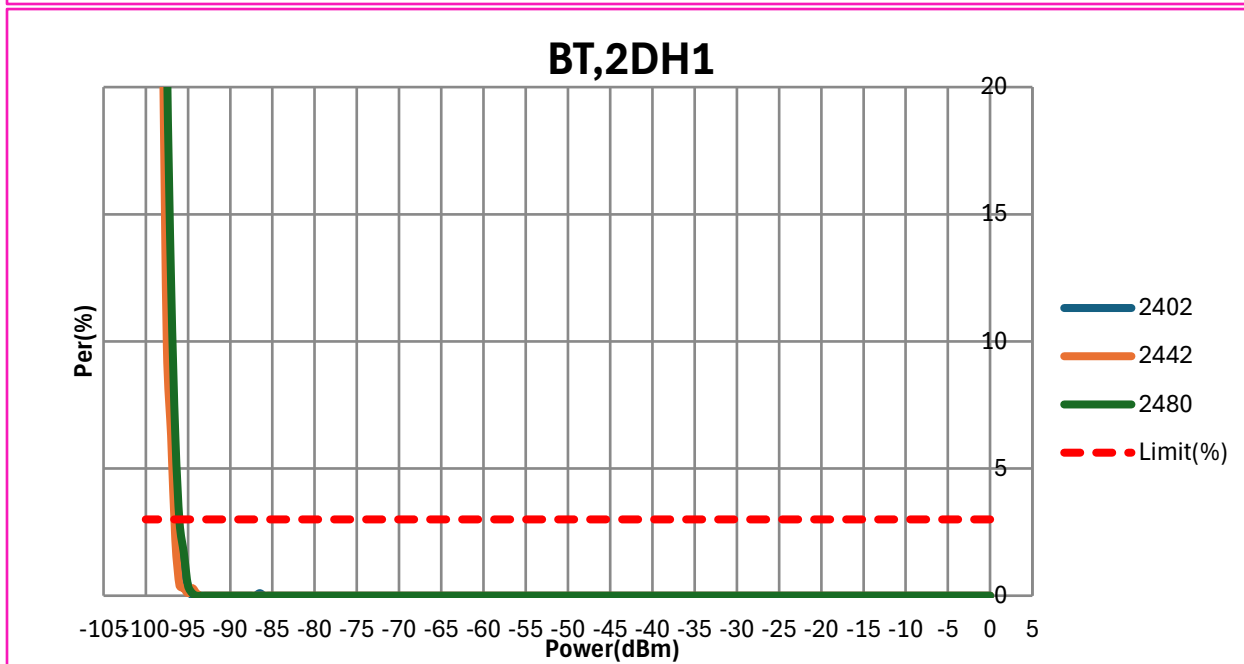
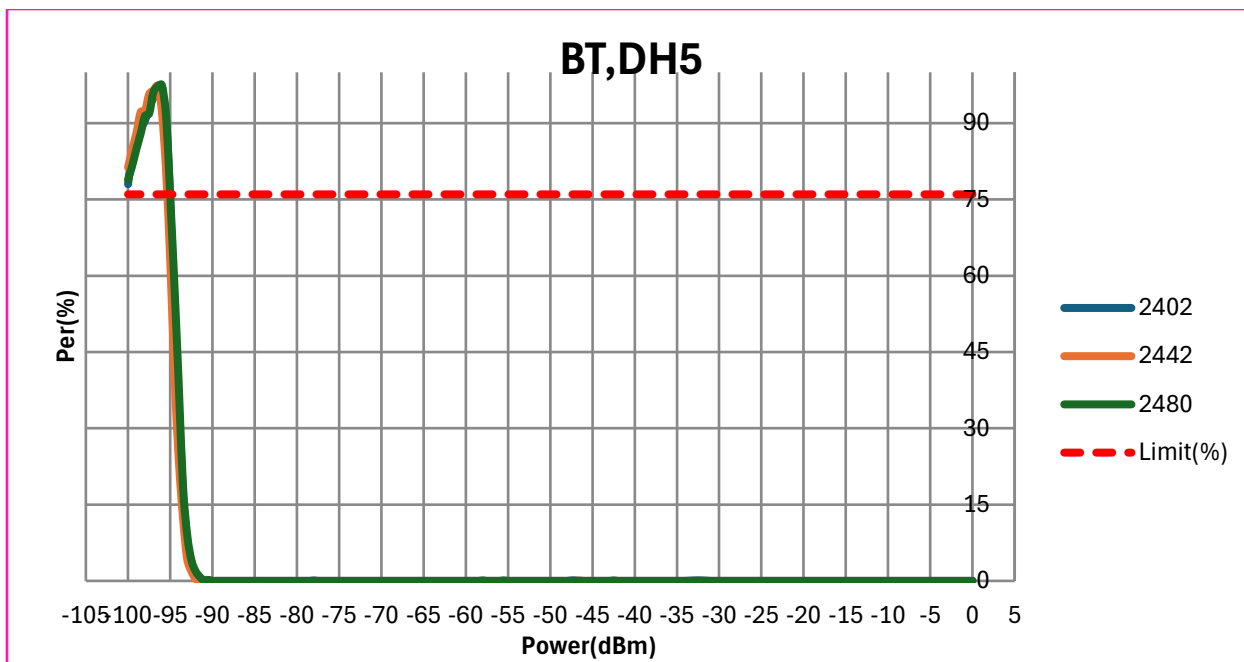
Mode	Test item	Requirements	Channels (-40deg)			Channels (25deg)			Channels (85deg)		
			2402	2441	2480	2402	2441	2480	2402	2441	2480
Output Power	Tx Output Power BLE	20	19.1	19.92	19.78	19.5	19.5	19.4	19.23	19.95	19.88
In-Band Emission	1Mbps, F = F0± 2 MHz	-48	-42.39	-41.57	-41.75	-41.49	-41.21	-41.63	-41.92	-41.15	-41.44
	1Mbps, F = F0± 3 MHz	-50	-43.56	-45.08	-45.07	-45.05	-44.87	-45.16	-41.62	-45.11	-44.99
	2Mbps, F = F0± 4 MHz	-51	-51.39	-45.57	-46.64	-47.13	-47.31	-44.79	-50.31	-46.59	-47.16
	2Mbps, F = F0± 5MH	-53	-54.35	-50.86	-52.28	-49.17	-48.82	-52.64	-54.52	-50.88	-53.56
	2Mbps, F = F0± 6 MHz	< -50				-	-	-			
Modulation Characteristics	1Mbps, Δf1avg	251 KHz	251.85	251.9	251.84	252.11	251.55	251.6	252.01	252.42	251.01
	1Mbps, Δf2max > 185KH	100%	226.79	223.08	218.42	223.09	222.82	218.93	227.02	222.31	220.01
	1Mbps, Δf2avg/Δf1avg	0.89	0.88	0.86	0.85	0.88	0.88	0.87	0.87	0.86	0.86
	2Mbps, Δf1avg	502 KHz	499.3	498.72	498.35	499.36	500.08	499.38	499.47	498.83	498.6
	2Mbps, Δf2max > 370KH	100%	432.25	428.87	436.55	431.46	431.66	442.23	432.39	431.35	436.19
	2Mbps, Δf2avg/Δf1avg	0.89	0.85	0.85	0.87	0.86	0.86	0.88	0.85	0.85	0.86
	S8 (125 Kbps), Δf1avg	251	252.28	251.5	250.84	222.48	221.81	221.52	252.06	251.07	253.01
	S8 (125 Kbps), Δf1max > 185KH	100%	255.58	259.47	255.93	258.03	257.67	257.49	255.86	257.09	258.02

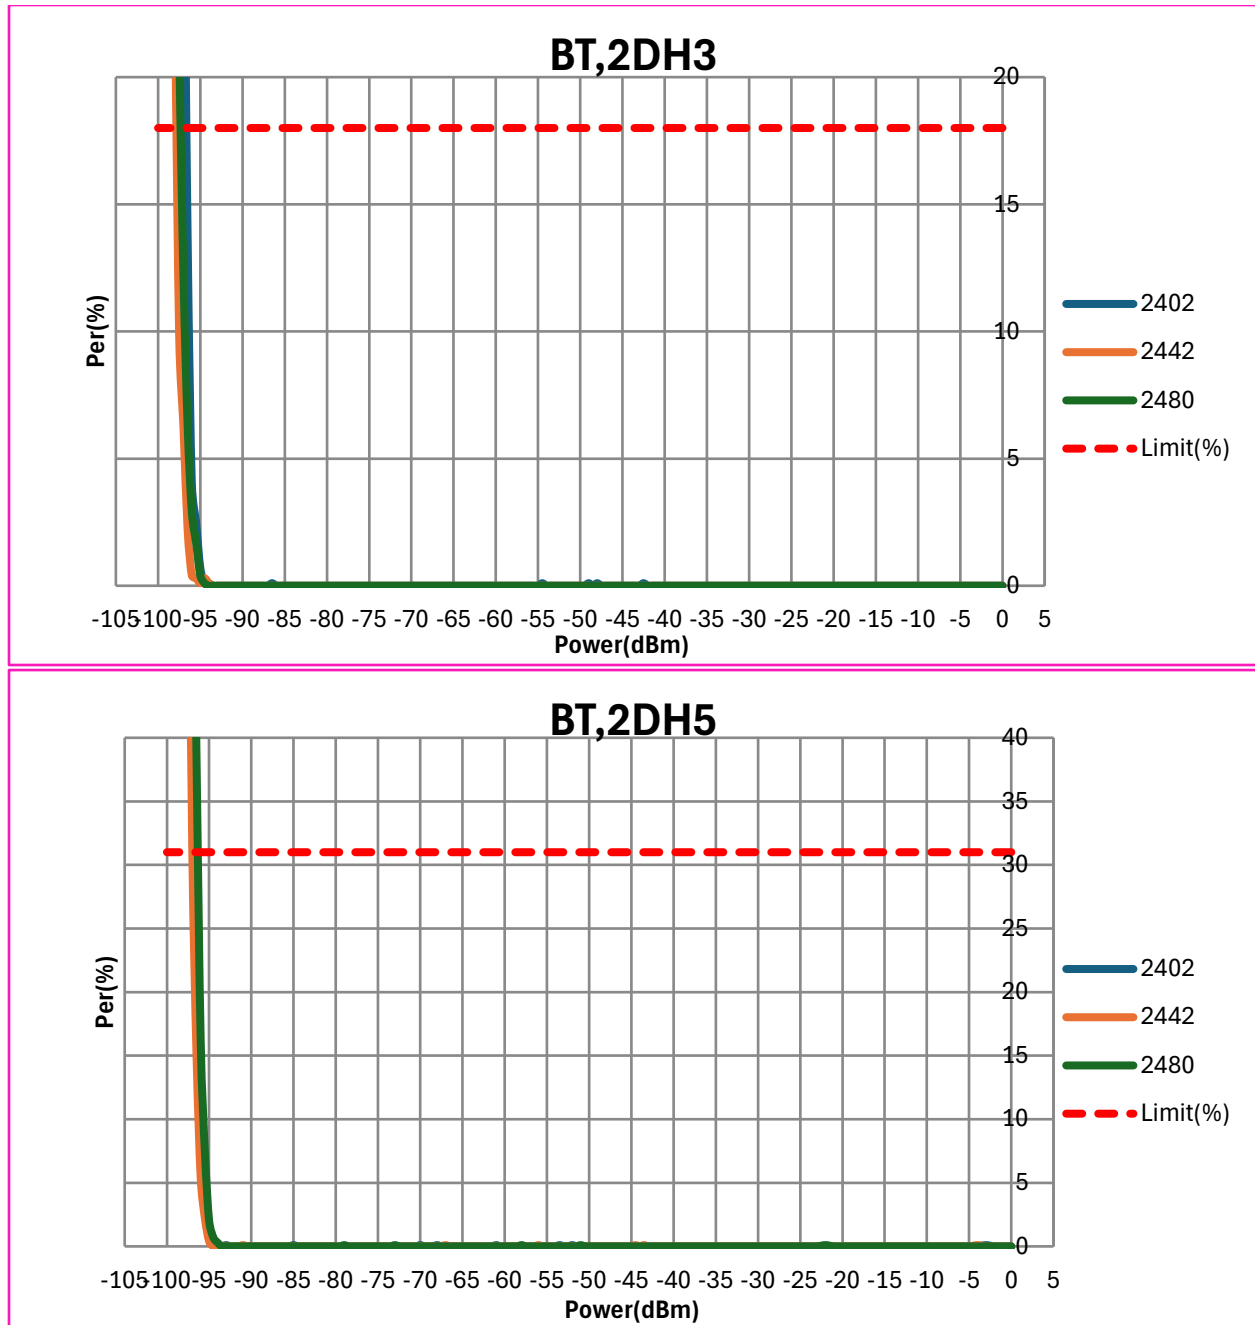
2.3 BT and BLE Rx test summary

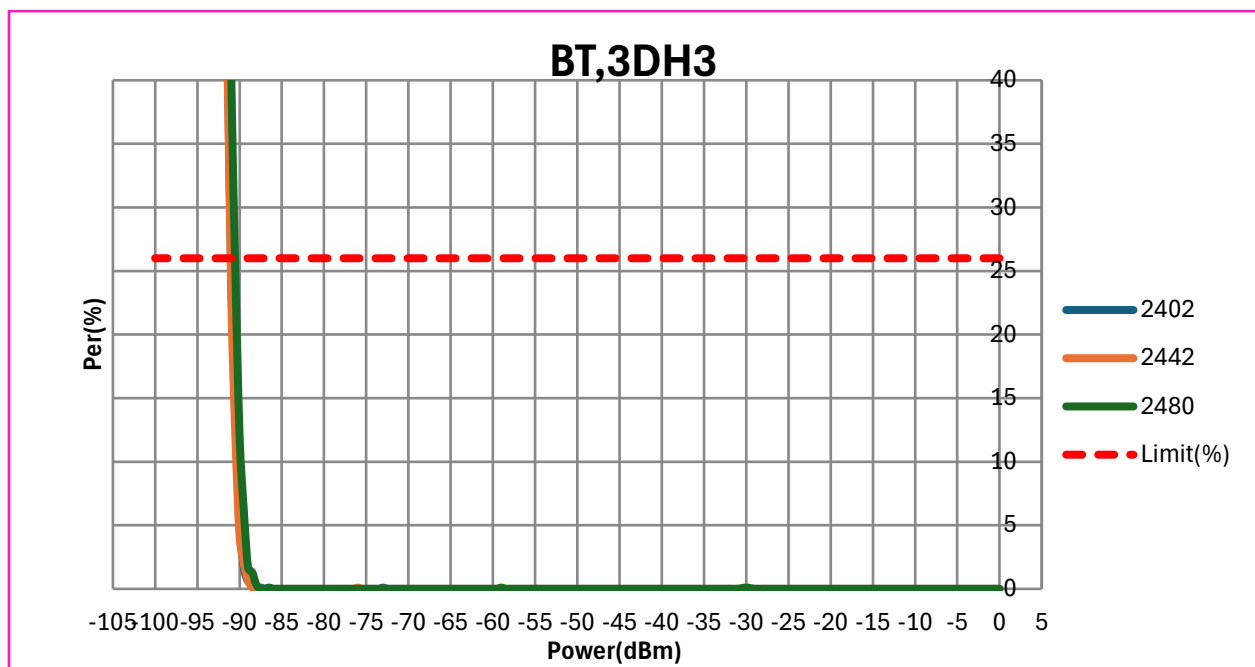
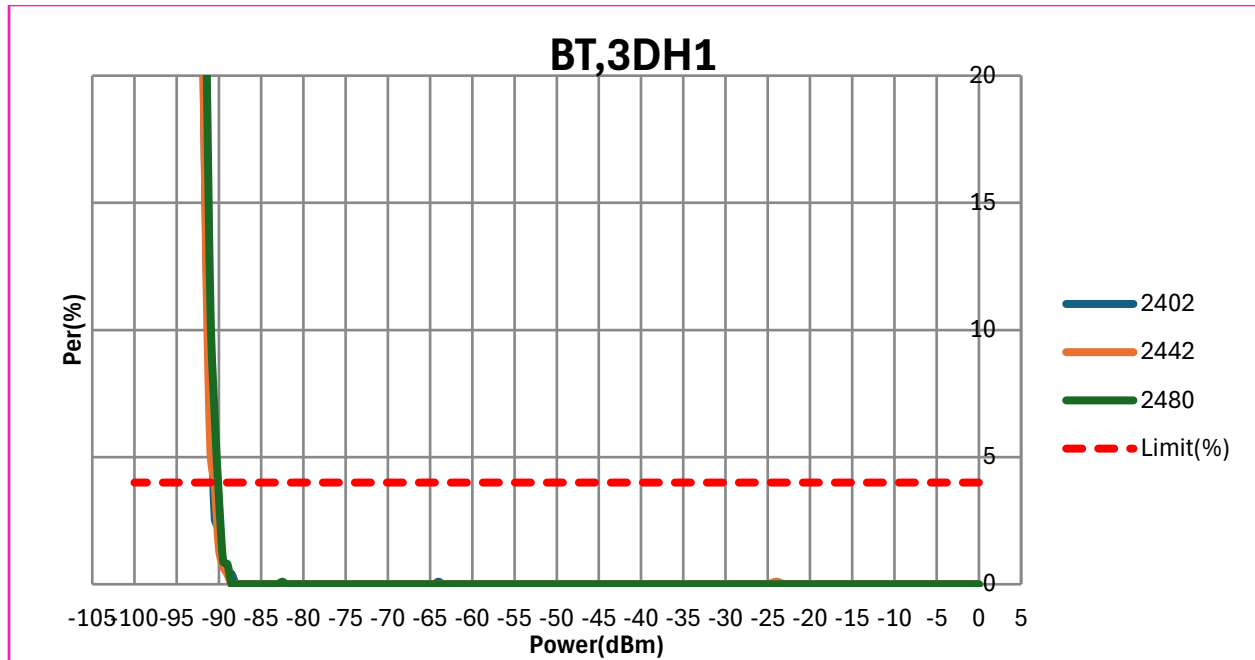
Mode	Test item	Note	Requirements	Channels (-40deg)			Channels (25deg)			Channels (85deg)		
				2402	2441	2480	2402	2441	2480	2402	2441	2480
Receiver Sensitivity	BR 1 Mbps Multi-slot	0.1% BER Dirty Transmitter off	-94	-96	-96	-96	-94.5	-94.5	-94	-95.5	-95	-95
	EDR 2 Mbps Multi-slot	0.01% BER Dirty Transmitter off	-96	-98	-98	-98	-96.5	-96.5	-95.5	-97	-97	-96
	EDR 3 Mbps Multi-slot	0.01% BER Dirty Transmitter off	-90	-92	-92	-92	-90.5	-90.5	-90	-91	-91	-90.5
	LE 1M	Packet Length 37 bytes Dirty Transmitter off	-99	-100	-100	-100	-99.5	-99.5	-99	-100	-100	-100
	LE 2M	Packet Length 37 bytes Dirty Transmitter off	-97	-98	-98	-98	-97	-97	-97	-97.5	-97.5	-97.5
	S=2 (500 Kbps)	Packet Length 37 bytes Dirty Transmitter off	-102	-103	-103	-103	-102.5	-102	-102	-103	-103	-102.5
	S=8 (125 Kbps)	Packet Length 37 bytes Dirty Transmitter off	-105	-105	-105	-105	-105	-104	-104.5	-104	-104.5	-104

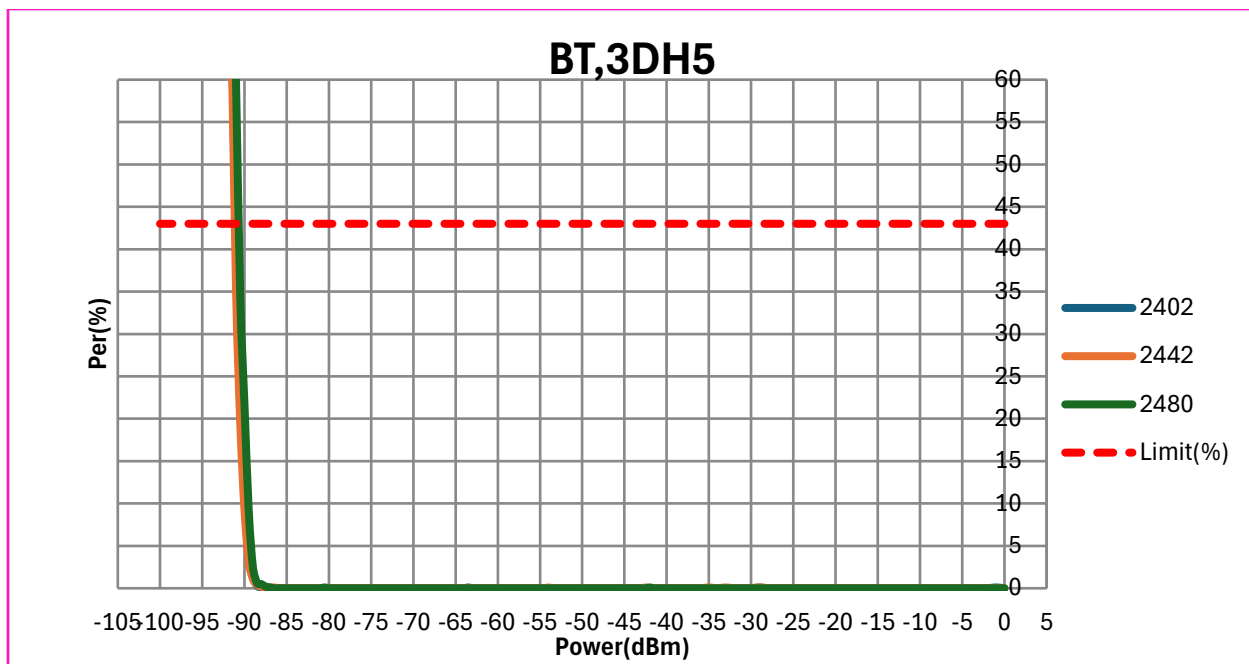
2.4 BT data rates waterfall plots



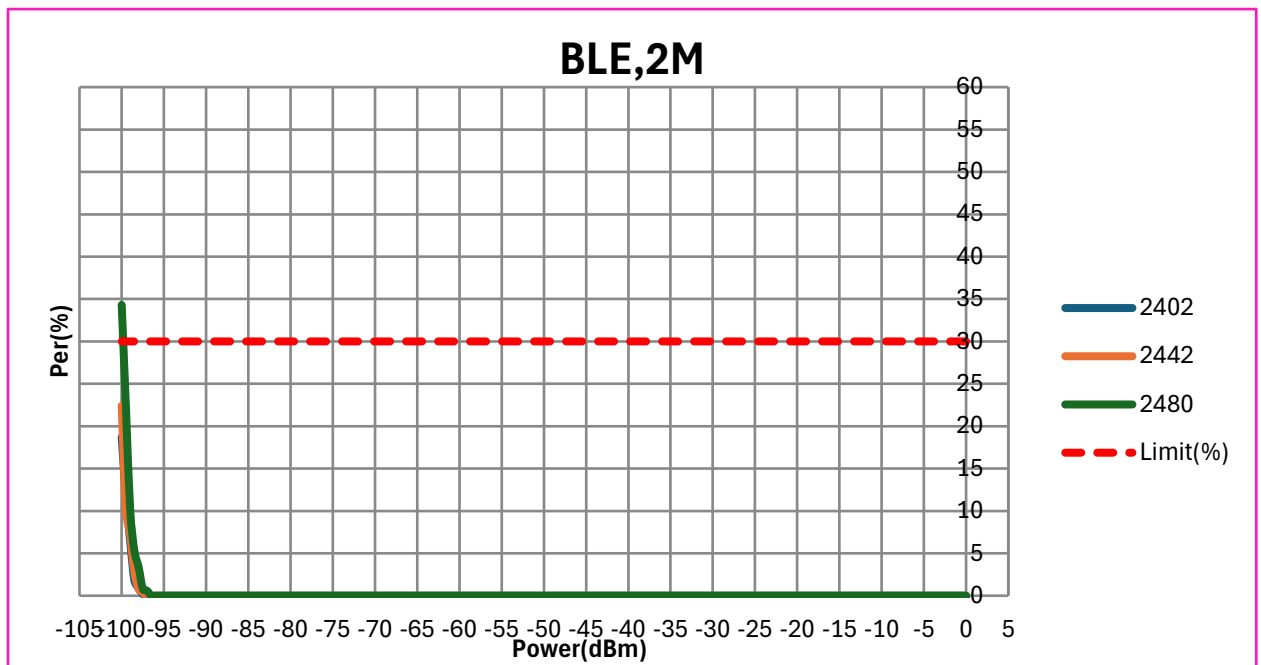
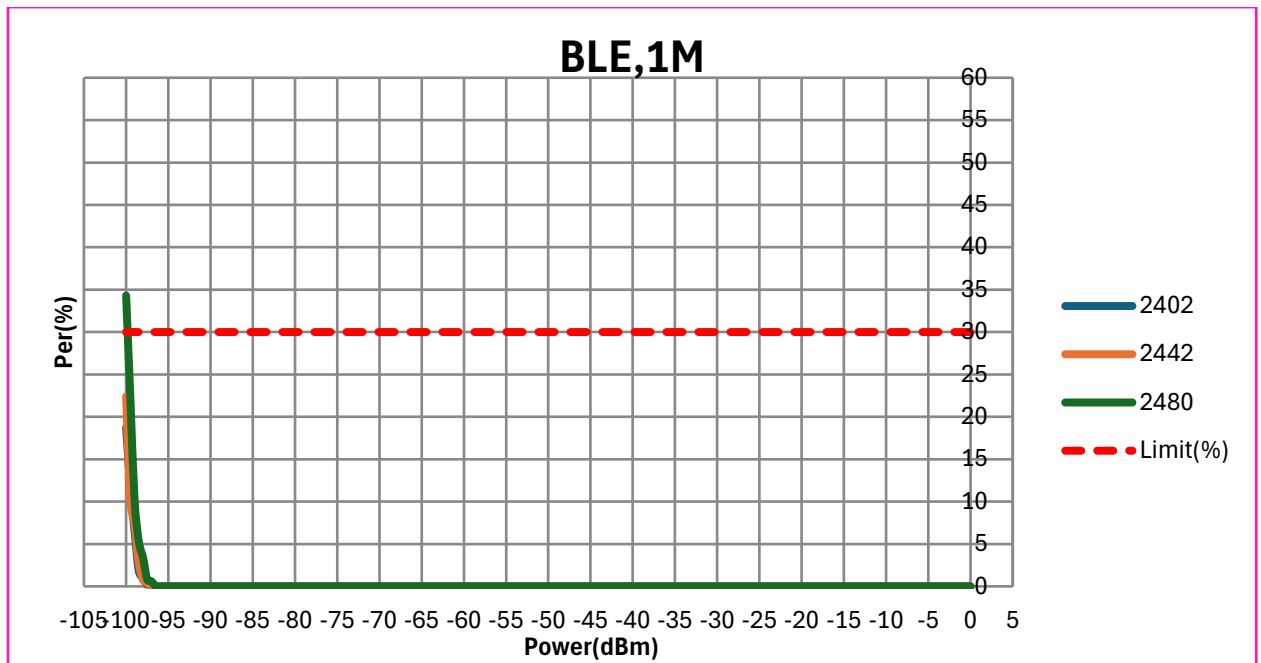


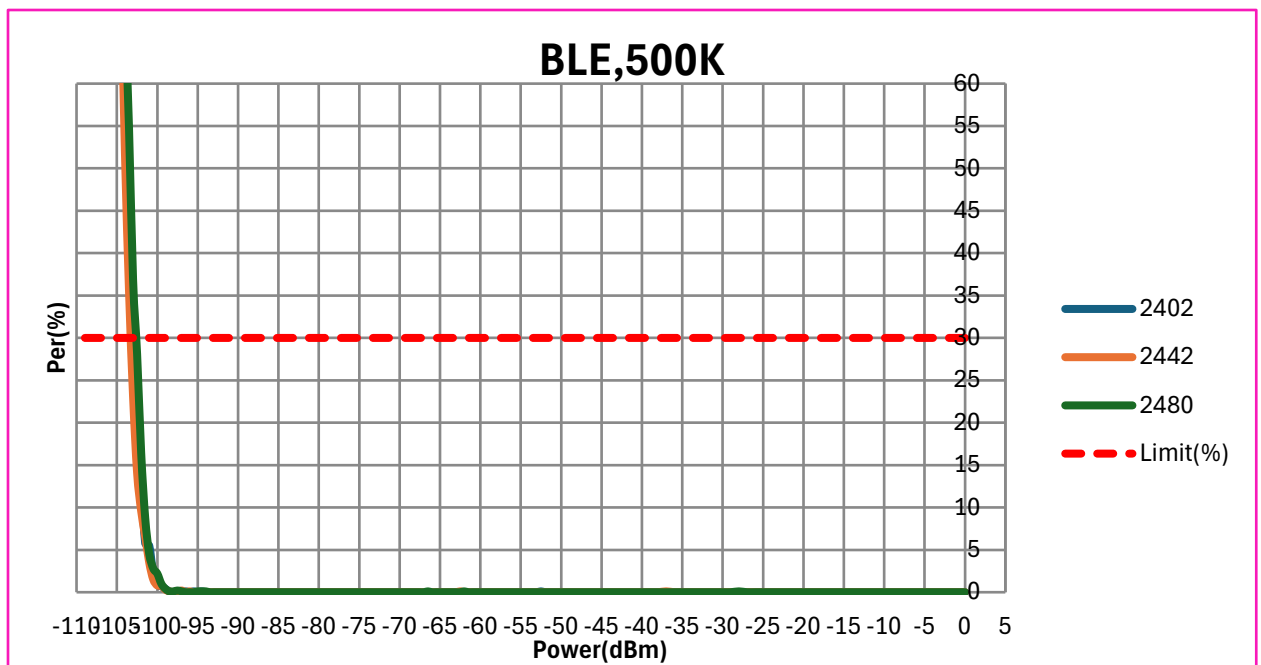
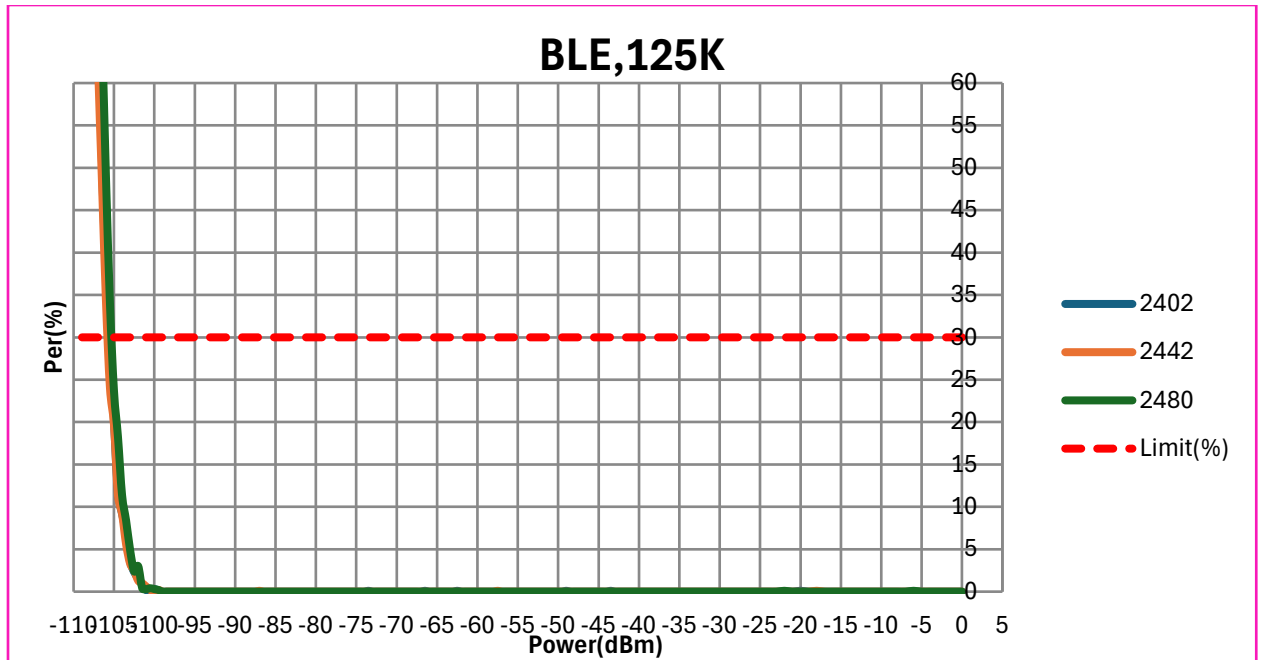






2.5 BLE data rates waterfall plots





3 802.15.4 DVT

This chapter describes the hardware 802.15.4 DVT RF design test data for QCC743M.

Test conditions

- Sample size: 3
- Tx/Rx chain: 1 Tx, 1 Rx
- Test frequencies: 2400 MHz – 2483.5 MHz
- Sample type: TT

Bench software

QCC740.OR.1.0

DVT specifics

- DVT level: CS

3.1 References and specifications

The documents below are references and specifications utilized for 802.15.4 testing.

- *802.15.4-2011 IEEE Standard*
- *802.15.4-2012 IEEE Standard Amendment*

3.1.1 General requirements and definitions

The PHY defined in this document is:

O-QPSK PHY: direct sequence spread spectrum (DSSS) PHY employing offset quadrature phase- shift keying (O-QPSK) modulation, operating in the 2450 MHz band

3.1.1.1 Operating frequency range

A compliant device shall operate in the frequency band using the modulation and spreading formats summarized below.

PHY (MHz)	Frequency band (MHz)	Spreading parameters		Data parameters		
		Chip rate (kchip/s)	Modulation	Bit rate (kb/s)	Symbol rate (ksymbol/s)	Symbols
2450 DSSS	2400–2483.5	2000	O-QPSK	250	62.5	16-ary orthogonal

3.1.1.2 Channel assignments

Channel assignments are defined through a combination of channel numbers and channel pages.

3.1.1.3 Channel numbering for 2450 MHz bands

For channel page zero, 16 channels are available in the 2450 MHz band. The center frequency of these channels is defined as follows:

$$F_c = 2405 + 5(k - 11) \text{ in megahertz, for } k = 11, 12, \dots, 26 \text{ where}$$

k is the channel number.

For channel pages one and two, 11 channels numbered zero to ten are available across the two frequency bands to support the O-QPSK PHYs.

3.2 Radio specifications

3.2.1 RF power measurement

Unless otherwise stated, all RF power measurements, either transmit or receive, shall be made at the appropriate transceiver to antenna connector. The measurements shall be made with equipment that is either matched to the impedance of the antenna connector or corrected for any mismatch. For devices without an antenna connector, the measurements shall be interpreted as effective isotropic radiated power (EIRP) (that is, a 0 dBi gain antenna), and any radiated measurements shall be corrected to compensate for the antenna gain in the implementation.

3.2.2 Receiver sensitivity definitions

The conditions for measuring receiver sensitivity are defined below:

Term	Definition of term	Conditions
Packet Error Rate (PER)	Average fraction of transmitted packets that are not correctly received.	Average measured over random PSDU data.
Receiver Sensitivity	Lowest input power for which the PER conditions are met.	PSDU length = 20 octets. – PER < 1%. Power measured at antenna terminals. Interference is not present.

3.2.3 RF power measurements

Unless otherwise stated, all RF power measurements, either transmit or receive, shall be made at the appropriate transceiver to antenna connector. The measurements shall be made with equipment that is either matched to the impedance of the antenna connector or corrected for any mismatch. For devices without an antenna connector, the measurements shall be interpreted as effective isotropic radiated power (EIRP) (that is, a 0 dBi gain antenna), and any radiated measurements shall be corrected to compensate for the antenna gain in the implementation.

3.2.4 Transmit power spectral density (PSD) mask

When operating in the 2450 MHz band, the transmitted spectral products shall be less than the limits specified below. For both relative and absolute limits, average spectral power shall be measured using a 100 kHz resolution bandwidth. For the relative limit, the reference level shall be the highest average spectral power measured within ± 1 MHz of the carrier frequency.

Table 3-1 2450 MHz band O-QPSK transmit PSD limits

Frequency	Relative limit	Absolute limit
$ f - f_c > 3.5$ MHz	-20 dB	-30 dBm

3.2.5 Symbol rate

The O-QPSK PHY symbol rate shall be 62.5 ksymbol/s when operating in the 2450 MHz band with an accuracy of ± 40 ppm.

3.2.6 Receiver sensitivity

A compliant device shall be capable of achieving a receiver sensitivity of -84 dBm or better.

3.2.7 Receiver interference rejection

The minimum receiver interference rejection levels are given below. The adjacent channel is one on either side of the desired channel that is closest in frequency to the desired channel, and the alternate channel is one more removed from the adjacent channel. For example, when channel 5 is the desired channel, channel 4 and channel 6 are the adjacent channels, and channel 3 and channel 7 are the alternate channel.

Table 3-2 Minimum receiver interference rejection requirements

Adjacent channel rejection	Alternate channel rejection
25 dB	35 dB

The adjacent channel rejection shall be measured as follows: the desired signal shall be a compliant O-QPSK PHY signal, of pseudo-random data. The desired signal is input to the receiver at a level 3 dB greater than the maximum allowed receiver sensitivity.

In either the adjacent or the alternate channel, a compliant O-QPSK PHY signal, is input at the level specified relative to the desired signal. The test shall be performed for only one

interfering signal at a time. The receiver shall meet the error rate criteria defined under these conditions.

3.2.8 Error vector magnitude (EVM)

The O-QPSK PHY shall have EVM values of less than 5% when measured for 1000 chips.

3.2.9 Transmit center frequency tolerance

The O-QPSK PHY transmit center frequency tolerance shall be ± 40 ppm maximum.

3.2.10 Transmit power

The O-QPSK PHY shall be capable of transmitting at a power level of +20 dBm, the output power range shall be from + 0 dBm to +20 dBm.

3.2.11 Receiver maximum input level of desired signal

The O-QPSK PHY shall have a receiver maximum input level greater than or equal to -9 dBm.

3.3 802.15.4 test summary

Test item	Target	Channels (-40deg)			Channels (25deg)			Channels (85deg)		
		2405	2440	2480	2405	2440	2480	2405	2440	2480
Transmitter Output Power	+20 dBm	19.06	19.52	19.65	20.1	20.08	20.1	19.2	19.59	19.79
Transmitter Output Power (Variation over Channels)	+/- 1 dB	-0.94	-0.48	-0.35	0.1	0.08	0.1	-0.8	-0.41	-0.21
Transmitter Output Power (Variation over Temperature)	+/- 1.5 dB	-	-	-	-	-	-	-	-	-
Transmitter EVM	< 13%	14.02	14.14	13.81	14.1	13.99	13.54	14.02	14.07	13.78
Center Frequency Tolerance	+/- 100 kHz	9.43	9.4	9.37	1.15	1.46	0.94	-7.02	-7.04	-7.05
Spectral PSD Mask (Margin)	< 30 dB	-48.0	-46.55	-49.0	-48.6	-47.75	-49.1	-47.65	-47.55	-49.3
Spurious Emission (2nd & 3rd Harmonics)	41 dBc	-50	-50.5	-50.2	-52	-51	-51	-49	-50	-50
Receiver Sensitivity	-102 dBm	-104	-104	-104.5	-104.5	-104.5	-104.5	-104	-104	-104.5

4 Harmonics and band edge

Table 4-1 Harmonics

Test Conduction	Modulation	Frequency (MHz)	Tx Power	Harmonics		
				Second	Third	SPEC
RBW:1MHz VBW:3MHZ Sweep time: Auto Detector mode: AVG	11N (MCS0)	2412	20.21	-56.16	-67.23	< -41.25dBm
		2437	20.19	-58.56	67.92	
		2462	20.13	-59.19	-68.39	
	11B(11M)	2412	21.57	-48.85	-63.43	
		2437	21.55	-49.98	-65.43	
		2462	2136	-50.34	-66.02	

Table 4-2 Band edge

Modulation	Frequency (MHz)	Tx Power	Band edge		
			Frequency (MHz)	Emission (dBm)	SPEC
11N 20MHz MCS0	2412	14.19	2390	-44.51	<-41.25dBm
	2437	14.75	2483.5	-44.59	
	2462	11.13	2483.5	-43.28	
11N 40MHz MCS0	2422	12.89	2390	-43.68	<-41.25dBm
	2452	15.67	2483.5	-43.79	
	2462	11.55	2483.5	-43.95	
11B 20M 11Mbps	2422	21.46	2390	-45.51	<-41.25dBm
	2452	21.11	2483.5	-46.25	
	2462	15.33	2483.5	-44.63	

LEGAL INFORMATION

Your access to and use of this material, along with any documents, software, specifications, reference board files, drawings, diagnostics and other information contained herein (collectively this “Material”), is subject to your (including the corporation or other legal entity you represent, collectively “You” or “Your”) acceptance of the terms and conditions (“Terms of Use”) set forth below. If You do not agree to these Terms of Use, you may not use this Material and shall immediately destroy any copy thereof.

1) Legal Notice.

This Material is being made available to You solely for Your internal use with those products and service offerings of Qualcomm Technologies, Inc. (“Qualcomm Technologies”), its affiliates and/or licensors described in this Material, and shall not be used for any other purposes. If this Material is marked as “Qualcomm Internal Use Only”, no license is granted to You herein, and You must immediately (a) destroy or return this Material to Qualcomm Technologies, and (b) report Your receipt of this Material to qualcomm.support@qti.qualcomm.com. This Material may not be altered, edited, or modified in any way without Qualcomm Technologies’ prior written approval, nor may it be used for any machine learning or artificial intelligence development purpose which results, whether directly or indirectly, in the creation or development of an automated device, program, tool, algorithm, process, methodology, product and/or other output. Unauthorized use or disclosure of this Material or the information contained herein is strictly prohibited, and You agree to indemnify Qualcomm Technologies, its affiliates and licensors for any damages or losses suffered by Qualcomm Technologies, its affiliates and/or licensors for any such unauthorized uses or disclosures of this Material, in whole or part.

Qualcomm Technologies, its affiliates and/or licensors retain all rights and ownership in and to this Material. No license to any trademark, patent, copyright, mask work protection right or any other intellectual property right is either granted or implied by this Material or any information disclosed herein, including, but not limited to, any license to make, use, import or sell any product, service or technology offering embodying any of the information in this Material.

THIS MATERIAL IS BEING PROVIDED “AS IS” WITHOUT WARRANTY OF ANY KIND, WHETHER EXPRESSED, IMPLIED, STATUTORY OR OTHERWISE. TO THE MAXIMUM EXTENT PERMITTED BY LAW, QUALCOMM TECHNOLOGIES, ITS AFFILIATES AND/OR LICENSORS SPECIFICALLY DISCLAIM ALL WARRANTIES OF TITLE, MERCHANTABILITY, NON-INFRINGEMENT, FITNESS FOR A PARTICULAR PURPOSE, SATISFACTORY QUALITY, COMPLETENESS OR ACCURACY, AND ALL WARRANTIES ARISING OUT OF TRADE USAGE OR OUT OF A COURSE OF DEALING OR COURSE OF PERFORMANCE. MOREOVER, NEITHER QUALCOMM TECHNOLOGIES, NOR ANY OF ITS AFFILIATES AND/OR LICENSORS, SHALL BE LIABLE TO YOU OR ANY THIRD PARTY FOR ANY EXPENSES, LOSSES, USE, OR ACTIONS HOWSOEVER INCURRED OR UNDERTAKEN BY YOU IN RELIANCE ON THIS MATERIAL.

Certain product kits, tools and other items referenced in this Material may require You to accept additional terms and conditions before accessing or using those items.

Technical data specified in this Material may be subject to U.S. and other applicable export control laws. Transmission contrary to U.S. and any other applicable law is strictly prohibited.

Nothing in this Material is an offer to sell any of the components or devices referenced herein.

This Material is subject to change without further notification.

In the event of a conflict between these Terms of Use and the Website Terms of Use on www.qualcomm.com, the *Qualcomm Privacy Policy* referenced on www.qualcomm.com, or other legal statements or notices found on prior pages of the Material, these Terms of Use will control. In the event of a conflict between these Terms of Use and any other agreement (written or click-through, including, without limitation any non-disclosure agreement) executed by You and Qualcomm Technologies or a Qualcomm Technologies affiliate and/or licensor with respect to Your access to and use of this Material, the other agreement will control.

These Terms of Use shall be governed by and construed and enforced in accordance with the laws of the State of California, excluding the U.N. Convention on International Sale of Goods, without regard to conflict of laws principles. Any dispute, claim or controversy arising out of or relating to these Terms of Use, or the breach or validity hereof, shall be adjudicated only by a court of competent jurisdiction in the county of San Diego, State of California, and You hereby consent to the personal jurisdiction of such courts for that purpose.

2) Trademark and Product Attribution Statements.

Qualcomm is a trademark or registered trademark of Qualcomm Incorporated. Arm is a registered trademark of Arm Limited (or its subsidiaries) in the U.S. and/or elsewhere. The Bluetooth® word mark is a registered trademark owned by Bluetooth SIG, Inc. Other product and brand names referenced in this Material may be trademarks or registered trademarks of their respective owners.

Snapdragon and Qualcomm branded products referenced in this Material are products of Qualcomm Technologies, Inc. and/or its subsidiaries. Qualcomm patented technologies are licensed by Qualcomm Incorporated.